

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774840

Luminaire Tested: LD6D95BD010-EU6DR7070959035-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P774840
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D95BD010-EU6DR7070959035-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 12004.8 lumens
Efficiency: N/A
Efficacy: 121.0 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P774840

CATALOG NUMBER: LD6D95BD010-EU6DR7070959035-6LBS1H

Luminous Intensity Polar Plot

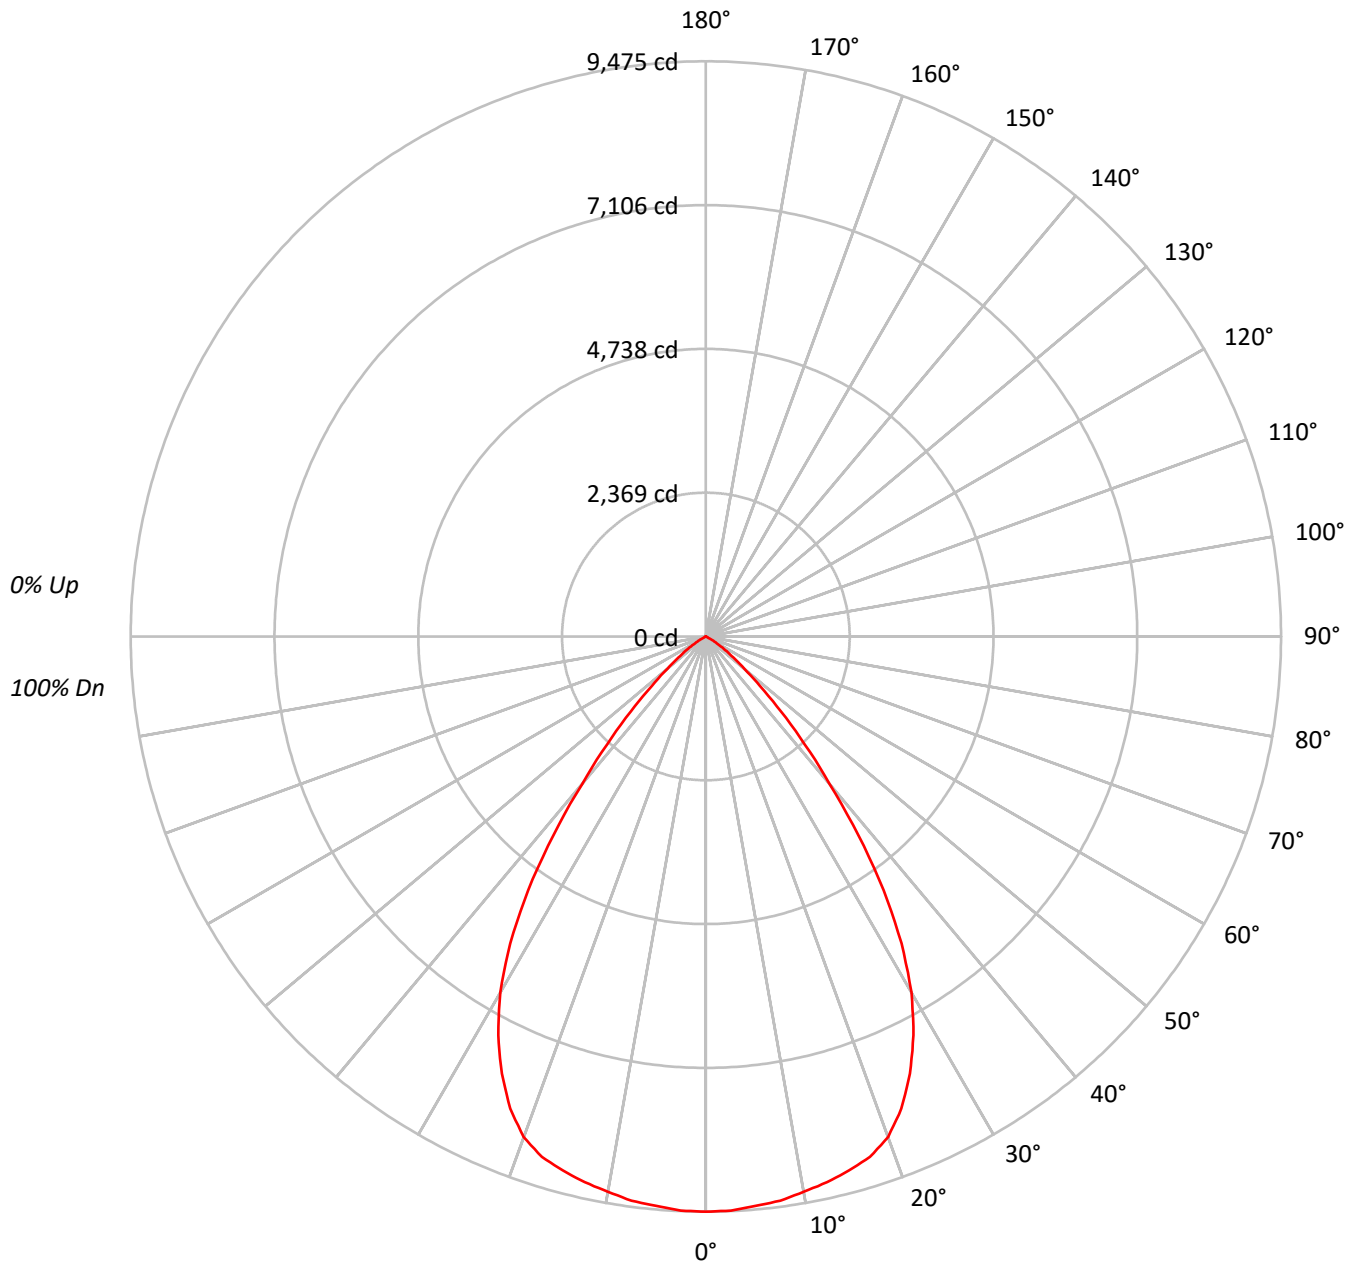



TEST NUMBER: P774840

CATALOG NUMBER: LD6D95BD010-EU6DR7070959035-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	92	97	93	90		94	91	88		91
3	101	94	88	84	99	92	87	83	90	85	82		87	84	81		85
4	95	87	81	76	93	86	80	76	83	78	75		81	77	74		79
5	89	80	74	69	88	79	73	69	78	72	68		76	71	68		74
6	84	75	68	63	83	74	68	63	72	67	63		71	66	62		69
7	80	69	63	58	78	69	62	58	67	62	58		66	61	57		65
8	75	65	58	54	74	64	58	54	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	53	50		58	53	49		57
10	67	57	50	46	66	56	50	46	55	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1035267
5°	1032685
10°	1030447
15°	1030161
20°	1020097
25°	958251
30°	854278
35°	681119
40°	452265
45°	270391
50°	140182
55°	73682
60°	26070
65°	440
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 270391 cd/sqm



TEST NUMBER: P774840

CATALOG NUMBER: LD6D95BD010-EU6DR7070959035-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	895.4	7.5
10°-20°	2568.1	21.4
20°-30°	3622.8	30.2
30°-40°	3127.4	26.1
40°-50°	1400.5	11.7
50°-60°	366.7	3.1
60°-70°	23.9	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7086.3	59.0
0°-40°	10213.7	85.1
0°-60°	11980.9	99.8
0°-90°	12004.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	12004.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9475	
5°	9416	895
15°	9107	2568
25°	7949	3623
35°	5106	3127
45°	1750	1401
55°	387	367
65°	2	24
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P774840

CATALOG NUMBER: LD6D95BD010-EU6DR7070959035-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	9475.2
2.5°	9465.0
5°	9415.6
7.5°	9374.7
10°	9287.8
12.5°	9209.4
15°	9107.2
17.5°	8989.6
20°	8773.3
22.5°	8417.1
25°	7948.6
27.5°	7405.0
30°	6771.2
32.5°	5995.9
35°	5106.5
37.5°	4125.1
40°	3170.9
42.5°	2409.3
45°	1749.9
47.5°	1206.3
50°	824.7
52.5°	569.1
55°	386.8
57.5°	233.4
60°	119.3
62.5°	37.5
65°	1.7
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)