

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774539

Luminaire Tested: LD6D95BD010-EU6DR5070959040-6LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P774539
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D95BD010-EU6DR5070959040-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11668.5 lumens
Efficiency: N/A
Efficacy: 117.6 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P774539

CATALOG NUMBER: LD6D95BD010-EU6DR5070959040-6LBDP1MW

Luminous Intensity Polar Plot

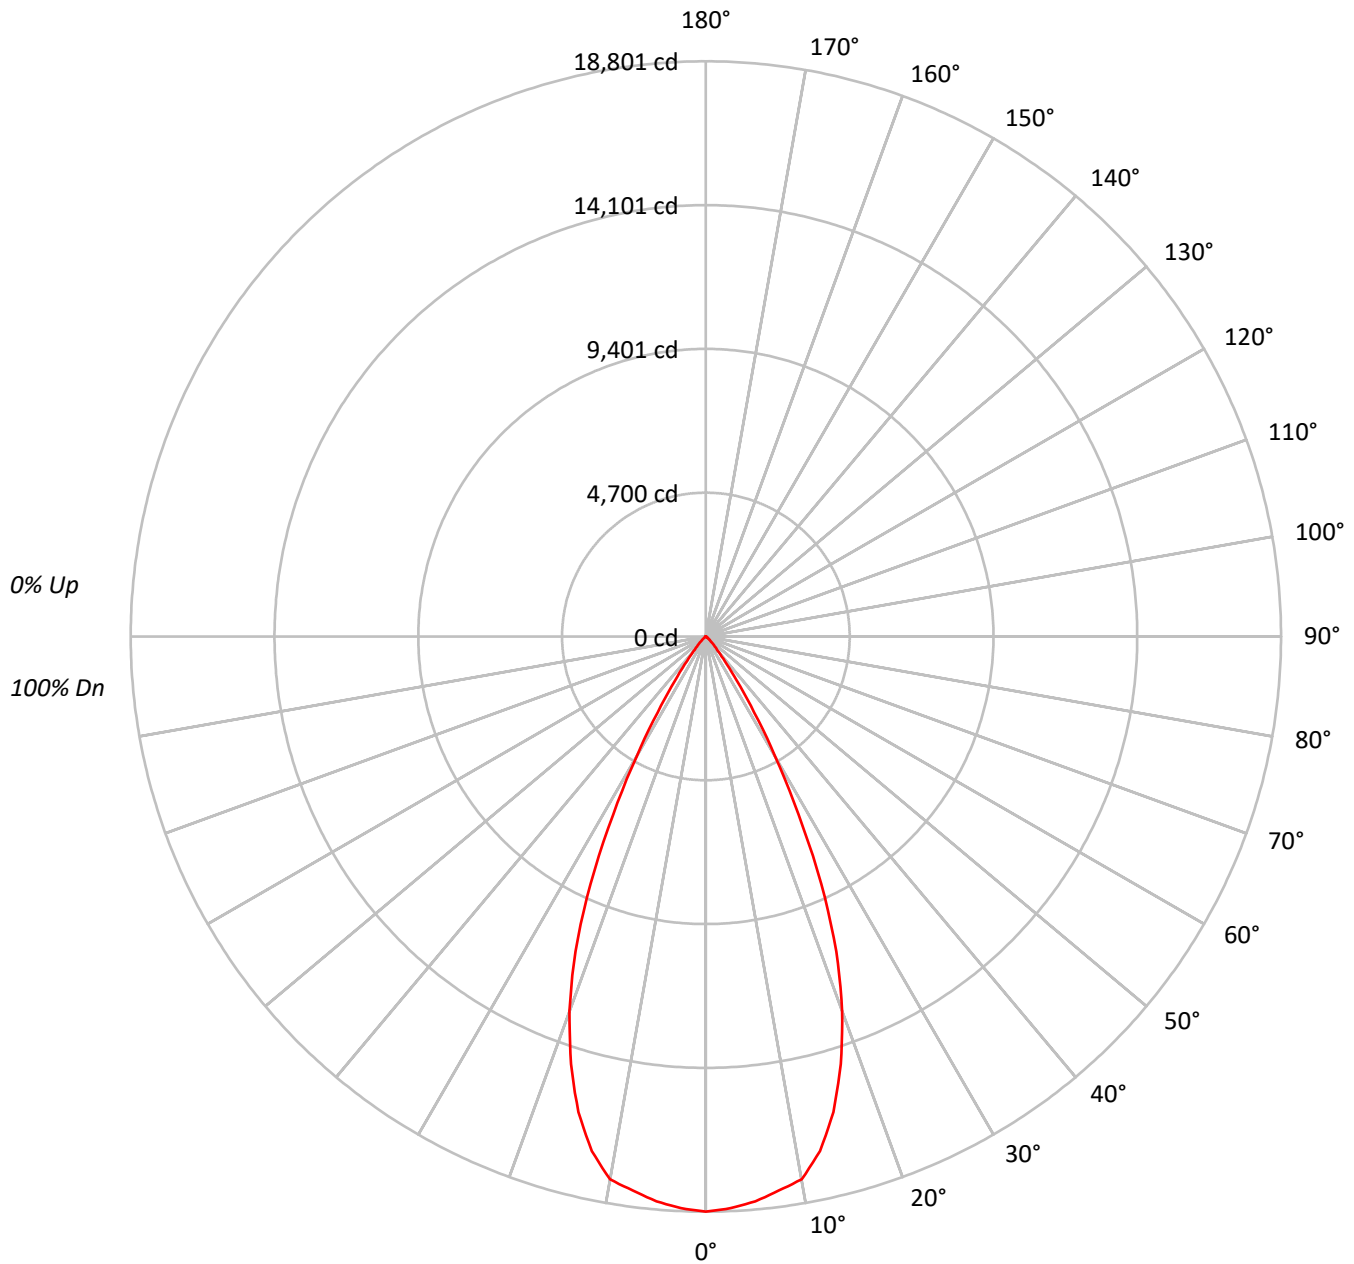



TEST NUMBER: P774539

CATALOG NUMBER: LD6D95BD010-EU6DR5070959040-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	110	108	106	106	104	102		102	101	99		98
2	109	105	101	98	107	103	100	97	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	90	87	84		89	85	83		87
5	96	89	84	80	95	88	83	79	86	82	79		85	81	78		83
6	92	84	79	75	91	83	79	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76
8	85	76	71	67	84	76	71	67	75	70	67		74	70	67		73
9	81	73	68	64	80	72	67	64	71	67	64		71	67	64		70
10	78	70	64	61	77	69	64	61	68	64	61		68	64	61		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2054201
5°	2032664
10°	1999185
15°	1820417
20°	1514803
25°	1075286
30°	569149
35°	231939
40°	86134
45°	39433
50°	16165
55°	8458
60°	4152
65°	1241
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 39433 cd/sqm



TEST NUMBER: P774539

CATALOG NUMBER: LD6D95BD010-EU6DR5070959040-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1751.7	15.0
10°-20°	4427.0	37.9
20°-30°	3976.6	34.1
30°-40°	1245.1	10.7
40°-50°	218.0	1.9
50°-60°	43.5	0.4
60°-70°	6.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	10155.4	87.0
0°-40°	11400.5	97.7
0°-60°	11661.9	99.9
0°-90°	11668.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	11668.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	18801	
5°	18533	###
15°	16094	4427
25°	8919	3977
35°	1739	1245
45°	255	218
55°	44	43
65°	5	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P774539

CATALOG NUMBER: LD6D95BD010-EU6DR5070959040-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	18800.9
2.5°	18707.4
5°	18533.0
7.5°	18266.7
10°	18019.4
12.5°	17226.9
15°	16093.5
17.5°	14654.3
20°	13028.0
22.5°	11146.4
25°	8919.4
27.5°	6557.6
30°	4511.2
32.5°	2937.2
35°	1738.9
37.5°	998.6
40°	603.9
42.5°	393.1
45°	255.2
47.5°	155.3
50°	95.1
52.5°	65.0
55°	44.4
57.5°	30.1
60°	19.0
62.5°	11.1
65°	4.8
67.5°	1.6
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)