

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774628

Luminaire Tested: LD6D95BD010-EU6DR5570959050-6LBDP1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P774628  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D95BD010-EU6DR5570959050-6LBDP1H  
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 55° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 12179.7 lumens  
Efficiency: N/A  
Efficacy: 122.8 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 99.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P774628

CATALOG NUMBER: LD6D95BD010-EU6DR5570959050-6LBDP1H

### Luminous Intensity Polar Plot

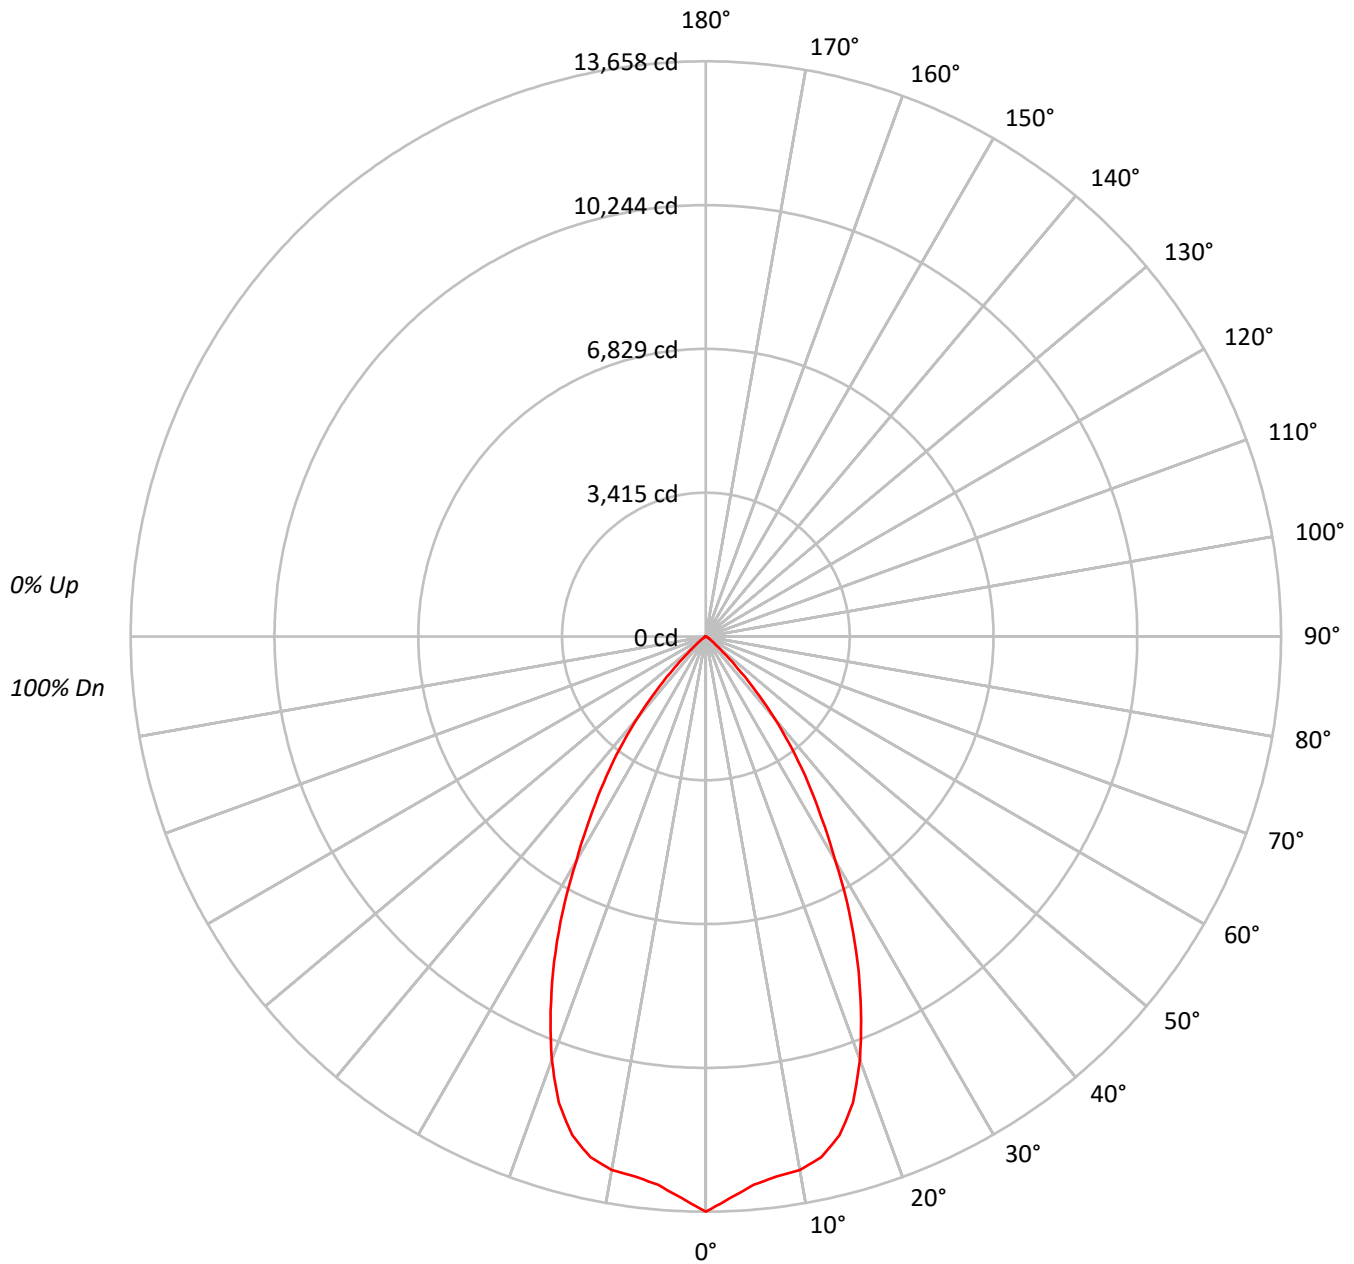



TEST NUMBER: P774628

CATALOG NUMBER: LD6D95BD010-EU6DR5570959050-6LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     |  | 20  |     |     |  |     | 20  |     |  |     |     | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     |  | 50  |     |     |  |     | 30  |     |  |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |
| RCR |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 |  | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 |
| 1   | 114 | 111 | 108 | 106 | 111 | 109 | 106 | 104 |  | 105 | 103 | 101 |  | 101 | 99  | 98  |  | 97  | 96  | 95  |
| 2   | 108 | 103 | 99  | 96  | 106 | 101 | 98  | 95  |  | 98  | 95  | 92  |  | 95  | 93  | 90  |  | 92  | 90  | 89  |
| 3   | 102 | 96  | 91  | 87  | 100 | 95  | 90  | 86  |  | 92  | 88  | 85  |  | 90  | 86  | 84  |  | 87  | 85  | 82  |
| 4   | 97  | 90  | 84  | 80  | 95  | 88  | 83  | 79  |  | 86  | 82  | 78  |  | 84  | 81  | 78  |  | 82  | 79  | 77  |
| 5   | 92  | 84  | 78  | 74  | 91  | 83  | 77  | 73  |  | 81  | 76  | 73  |  | 79  | 75  | 72  |  | 78  | 74  | 71  |
| 6   | 88  | 79  | 73  | 68  | 86  | 78  | 72  | 68  |  | 76  | 71  | 68  |  | 75  | 70  | 67  |  | 74  | 70  | 67  |
| 7   | 83  | 74  | 68  | 64  | 82  | 73  | 67  | 63  |  | 72  | 67  | 63  |  | 71  | 66  | 63  |  | 70  | 65  | 62  |
| 8   | 79  | 69  | 63  | 59  | 78  | 69  | 63  | 59  |  | 68  | 63  | 59  |  | 67  | 62  | 59  |  | 66  | 62  | 58  |
| 9   | 75  | 66  | 60  | 56  | 74  | 65  | 59  | 55  |  | 64  | 59  | 55  |  | 63  | 58  | 55  |  | 62  | 58  | 55  |
| 10  | 72  | 62  | 56  | 52  | 71  | 61  | 56  | 52  |  | 61  | 56  | 52  |  | 60  | 55  | 52  |  | 59  | 55  | 52  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 1492240 |
| 5°  | 1432977 |
| 10° | 1427579 |
| 15° | 1386564 |
| 20° | 1243248 |
| 25° | 1027486 |
| 30° | 776132  |
| 35° | 562755  |
| 40° | 360140  |
| 45° | 164484  |
| 50° | 53799   |
| 55° | 23221   |
| 60° | 9986    |
| 65° | 1319    |
| 70° | 0       |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 164484 cd/sqm



TEST NUMBER: P774628

CATALOG NUMBER: LD6D95BD010-EU6DR5570959050-6LBDP1H

**ZONAL LUMENS:**

| Zone      | Lumens  | % Fixture |
|-----------|---------|-----------|
| 0°-10°    | 1243.2  | 10.2      |
| 10°-20°   | 3393.0  | 27.9      |
| 20°-30°   | 3866.6  | 31.7      |
| 30°-40°   | 2632.2  | 21.6      |
| 40°-50°   | 907.0   | 7.4       |
| 50°-60°   | 125.4   | 1.0       |
| 60°-70°   | 12.1    | 0.1       |
| 70°-80°   | 0.0     | 0.0       |
| 80°-90°   | 0.0     | 0.0       |
| 90°-100°  | 0.0     | 0.0       |
| 100°-110° | 0.0     | 0.0       |
| 110°-120° | 0.0     | 0.0       |
| 120°-130° | 0.0     | 0.0       |
| 130°-140° | 0.0     | 0.0       |
| 140°-150° | 0.0     | 0.0       |
| 150°-160° | 0.0     | 0.0       |
| 160°-170° | 0.0     | 0.0       |
| 170°-180° | 0.0     | 0.0       |
| 0°-30°    | 8502.9  | 69.8      |
| 0°-40°    | 11135.1 | 91.4      |
| 0°-60°    | 12167.6 | 99.9      |
| 0°-90°    | 12179.7 | 100.0     |
| 90°-120°  | 0.0     | 0.0       |
| 90°-150°  | 0.0     | 0.0       |
| 90°-180°  | 0.0     | 0.0       |
| 0°-180°   | 12179.7 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°    | Flux |
|-----|-------|------|
| 0°  | 13658 |      |
| 5°  | 13065 | ###  |
| 15° | 12258 | 3393 |
| 25° | 8523  | 3867 |
| 35° | 4219  | 2632 |
| 45° | 1064  | 907  |
| 55° | 122   | 125  |
| 65° | 5     | 12   |
| 75° | 0     | 0    |
| 85° | 0     | 0    |
| 90° | 0     |      |



TEST NUMBER: P774628

CATALOG NUMBER: LD6D95BD010-EU6DR5570959050-6LBDP1H

**CANDELA DISTRIBUTION (FULL):**

|       | 0°      |
|-------|---------|
| 0°    | 13657.6 |
| 2.5°  | 13344.5 |
| 5°    | 13065.3 |
| 7.5°  | 12928.2 |
| 10°   | 12867.3 |
| 12.5° | 12664.2 |
| 15°   | 12258.0 |
| 17.5° | 11613.2 |
| 20°   | 10692.5 |
| 22.5° | 9629.7  |
| 25°   | 8522.9  |
| 27.5° | 7370.4  |
| 30°   | 6151.8  |
| 32.5° | 5119.5  |
| 35°   | 4219.1  |
| 37.5° | 3362.8  |
| 40°   | 2525.0  |
| 42.5° | 1749.9  |
| 45°   | 1064.5  |
| 47.5° | 573.7   |
| 50°   | 316.5   |
| 52.5° | 187.9   |
| 55°   | 121.9   |
| 57.5° | 77.9    |
| 60°   | 45.7    |
| 62.5° | 20.3    |
| 65°   | 5.1     |
| 67.5° | 1.7     |
| 70°   | 0.0     |
| 72.5° | 0.0     |
| 75°   | 0.0     |
| 77.5° | 0.0     |
| 80°   | 0.0     |
| 82.5° | 0.0     |
| 85°   | 0.0     |
| 87.5° | 0.0     |
| 90°   | 0.0     |



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)