

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761281

Luminaire Tested: LD6D15D010-EU6DR350215IC9030-6LBSQW1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P761281
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D15D010-EU6DR350215IC9030-6LBSQW1MW
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1220.7 lumens
Efficiency: N/A
Efficacy: 77.3 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P761281

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9030-6LBSQW1MW

Luminous Intensity Polar Plot

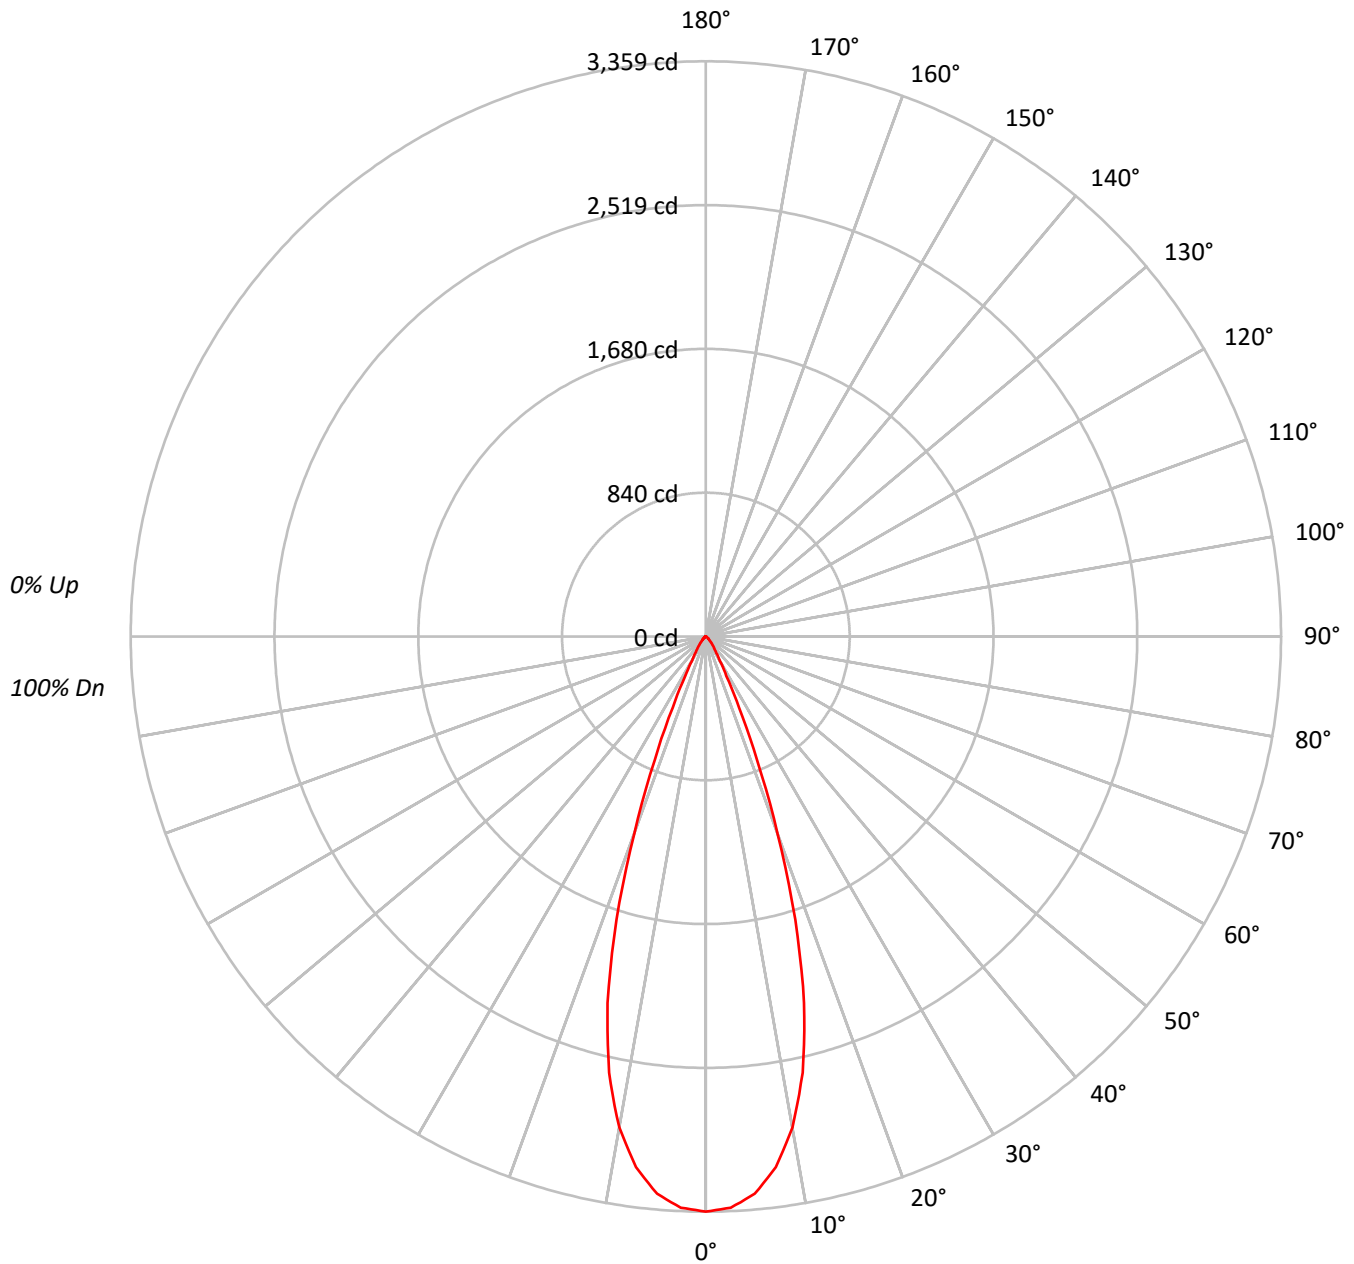



TEST NUMBER: P761281

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9030-6LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96		
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92		
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88		
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84		
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81		
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78		
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75		
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72		
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70		
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	366985
5°	358362
10°	322976
15°	250686
20°	142178
25°	55311
30°	20640
35°	11311
40°	7402
45°	4496
50°	2856
55°	2019
60°	1486
65°	801
70°	64
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4496 cd/sqm



TEST NUMBER: P761281

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9030-6LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	300.5	24.6
10°-20°	586.7	48.1
20°-30°	239.3	19.6
30°-40°	57.2	4.7
40°-50°	23.9	2.0
50°-60°	9.9	0.8
60°-70°	3.1	0.3
70°-80°	0.1	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1126.5	92.3
0°-40°	1183.7	97.0
0°-60°	1217.4	99.7
0°-90°	1220.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1220.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3359	
5°	3267	301
15°	2216	587
25°	459	239
35°	85	57
45°	29	24
55°	11	10
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P761281

CATALOG NUMBER: LD6D15D010-EU6DR350215IC9030-6LBSQW1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	3358.8
2.5°	3338.6
5°	3267.4
7.5°	3125.2
10°	2911.1
12.5°	2609.6
15°	2216.2
17.5°	1735.0
20°	1222.8
22.5°	779.7
25°	458.8
27.5°	259.4
30°	163.6
32.5°	114.8
35°	84.8
37.5°	65.5
40°	51.9
42.5°	39.9
45°	29.1
47.5°	21.8
50°	16.8
52.5°	13.3
55°	10.6
57.5°	8.6
60°	6.8
62.5°	4.9
65°	3.1
67.5°	1.1
70°	0.2
72.5°	0.2
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.2
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)