

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P769318

Luminaire Tested: LD6D60D010-EU6DR6555659040-6LBSQW1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P769318
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D60D010-EU6DR6555659040-6LBSQW1B
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5078.4 lumens
Efficiency: N/A
Efficacy: 78.9 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P769318

CATALOG NUMBER: LD6D60D010-EU6DR6555659040-6LBSQW1B

Luminous Intensity Polar Plot

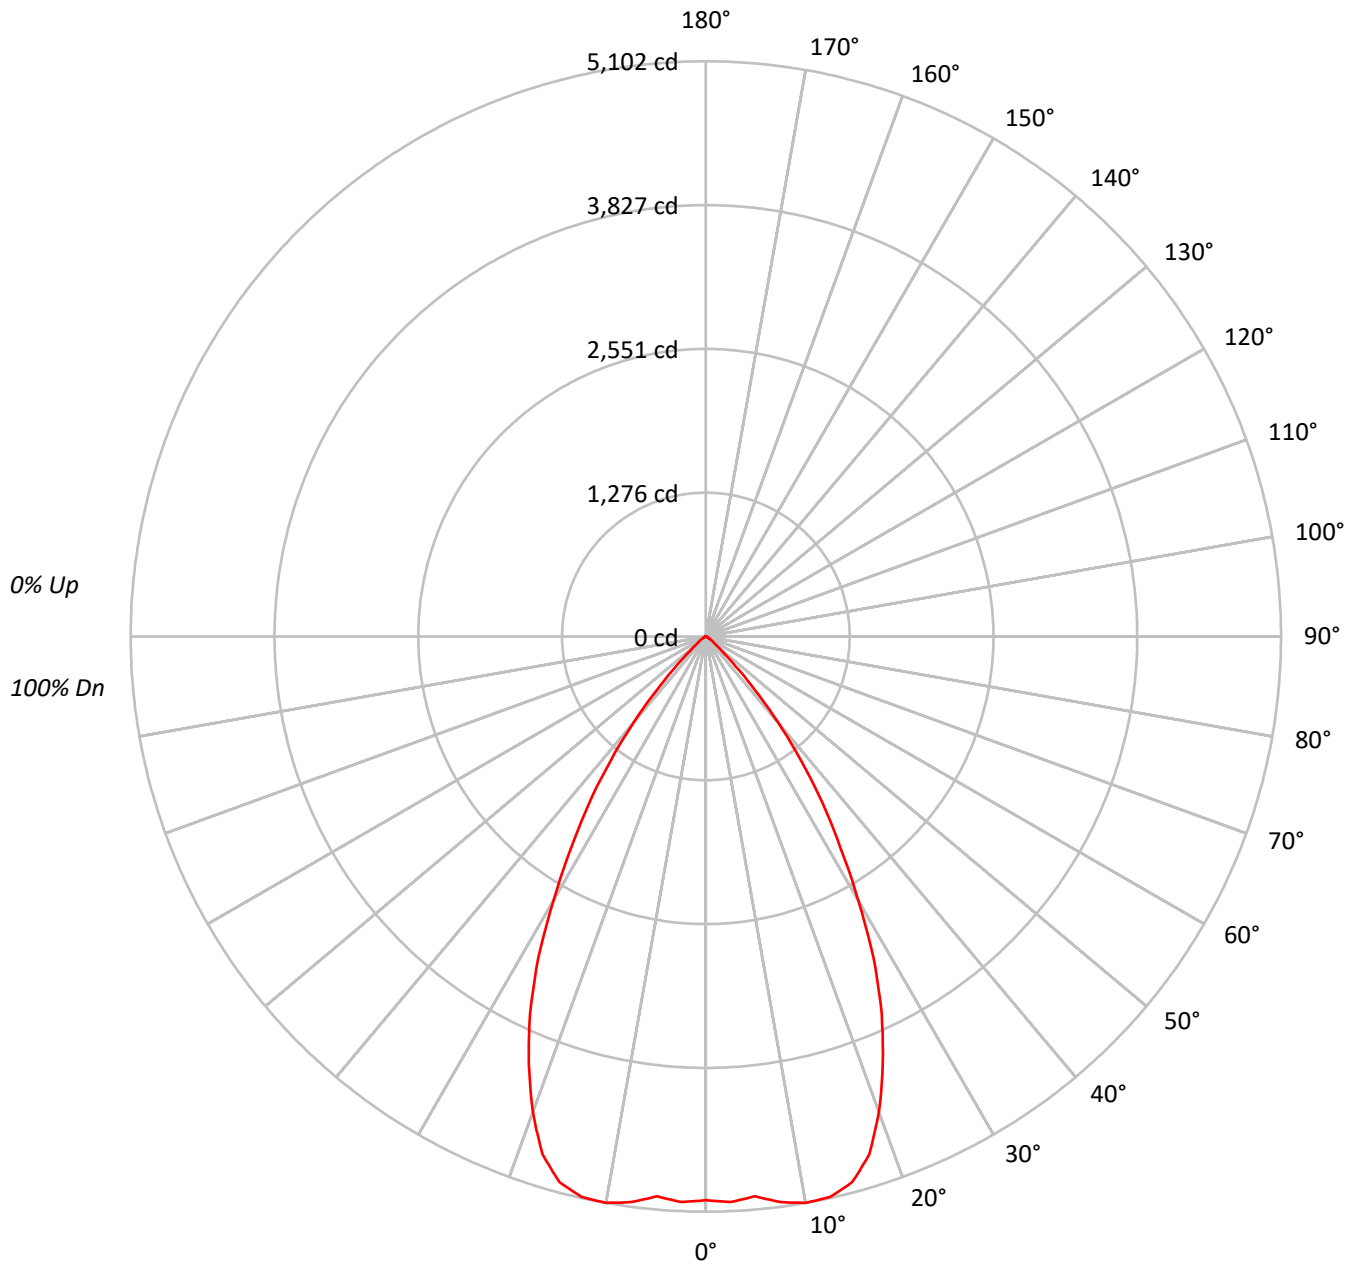



TEST NUMBER: P769318

CATALOG NUMBER: LD6D60D010-EU6DR6555659040-6LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87		
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80		
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69		
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65		
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60		
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57		
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53		
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	546304
5°	546756
10°	566004
15°	566944
20°	521961
25°	444743
30°	340465
35°	240529
40°	141974
45°	57635
50°	20890
55°	11639
60°	6687
65°	3671
70°	3865
75°	2997
80°	3146
85°	2633

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 57635 cd/sqm



TEST NUMBER: P769318

CATALOG NUMBER: LD6D60D010-EU6DR6555659040-6LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	481.5	9.5
10°-20°	1388.8	27.3
20°-30°	1666.3	32.8
30°-40°	1119.8	22.1
40°-50°	335.2	6.6
50°-60°	59.2	1.2
60°-70°	16.8	0.3
70°-80°	8.2	0.2
80°-90°	2.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3536.5	69.6
0°-40°	4656.3	91.7
0°-60°	5050.7	99.5
0°-90°	5078.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5078.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5000	
5°	4985	481
15°	5012	1389
25°	3689	1666
35°	1803	1120
45°	373	335
55°	61	59
65°	14	17
75°	7	8
85°	2	3
90°	0	



TEST NUMBER: P769318

CATALOG NUMBER: LD6D60D010-EU6DR6555659040-6LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	5000.0
2.5°	5021.3
5°	4985.1
7.5°	5060.4
10°	5101.6
12.5°	5091.6
15°	5012.1
17.5°	4817.4
20°	4489.1
22.5°	4102.6
25°	3689.1
27.5°	3222.2
30°	2698.6
32.5°	2224.0
35°	1803.3
37.5°	1387.7
40°	995.4
42.5°	650.1
45°	373.0
47.5°	197.5
50°	122.9
52.5°	85.3
55°	61.1
57.5°	44.1
60°	30.6
62.5°	19.9
65°	14.2
67.5°	12.8
70°	12.1
72.5°	9.2
75°	7.1
77.5°	6.4
80°	5.0
82.5°	3.6
85°	2.1
87.5°	1.4
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)