

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P769816

Luminaire Tested: LD6D65D010-EU6DR5055659027-6LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P769816
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D65D010-EU6DR5055659027-6LBCSSQMW
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7739.2 lumens
Efficiency: N/A
Efficacy: 106.3 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 72.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P769816

CATALOG NUMBER: LD6D65D010-EU6DR5055659027-6LBCSSQMW

Luminous Intensity Polar Plot

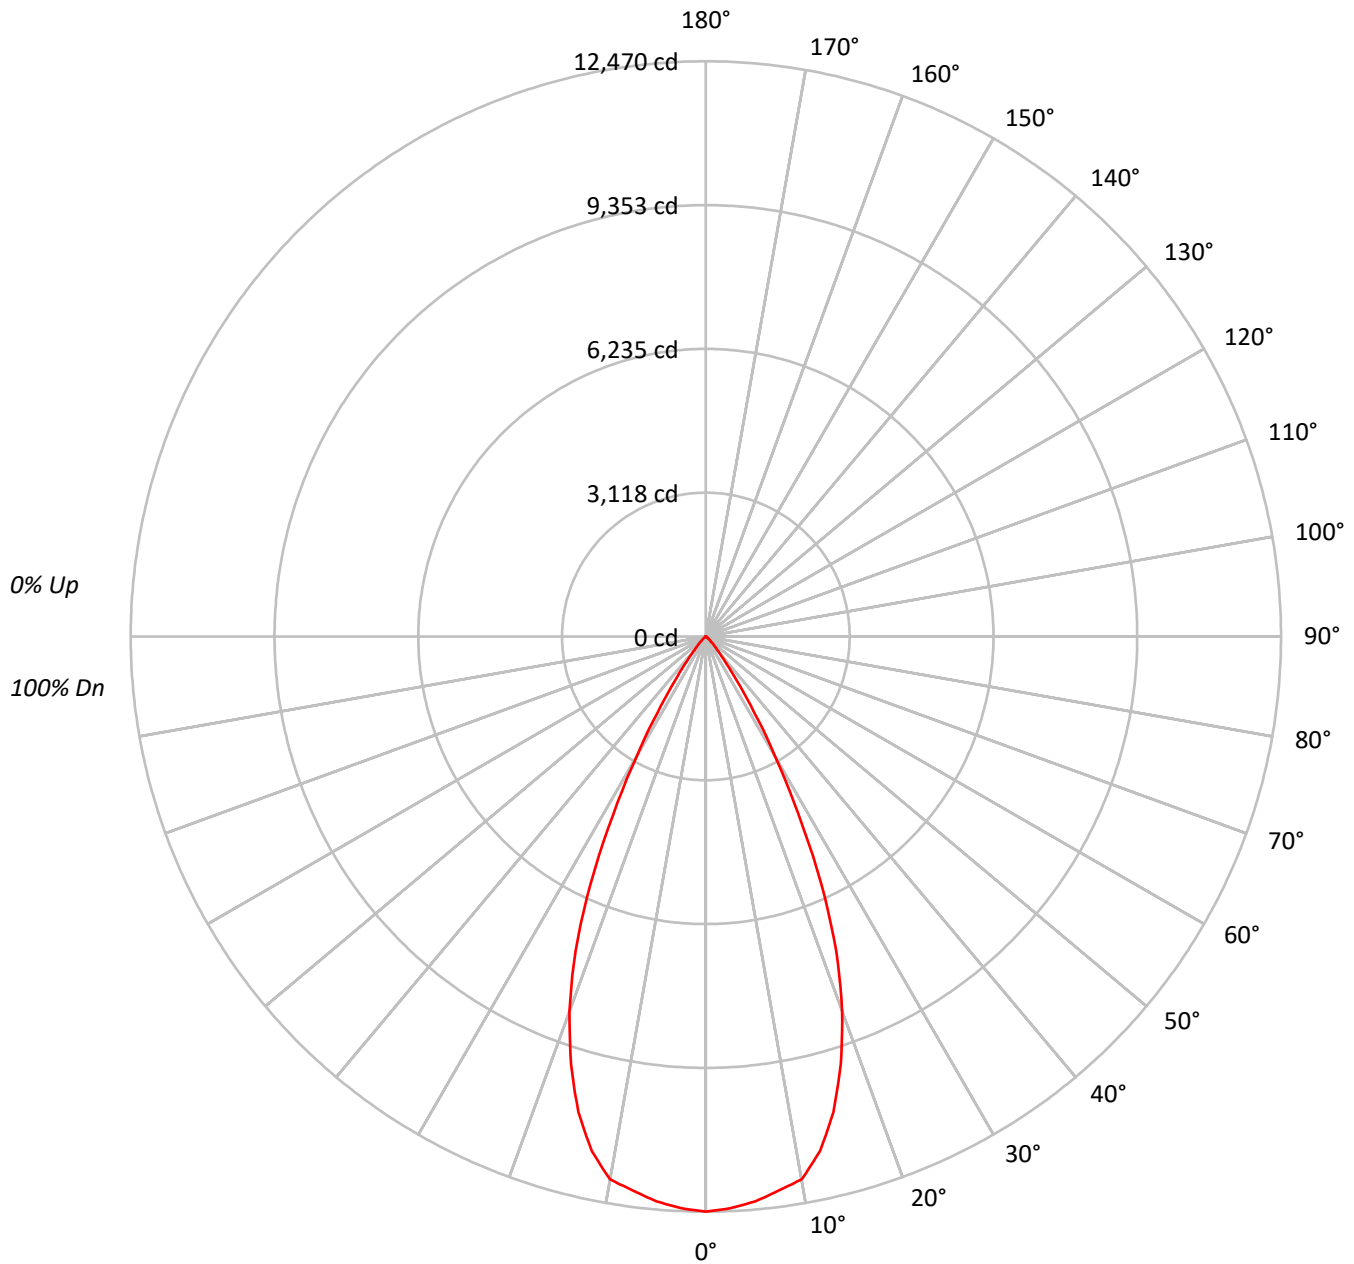



TEST NUMBER: P769816

CATALOG NUMBER: LD6D65D010-EU6DR5055659027-6LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	110	108	106	106	104	102		102	101	99		98
2	109	105	101	98	107	103	100	97	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	90	87	84		89	85	83		87
5	96	89	84	80	95	88	83	79	86	82	79		85	81	78		83
6	92	84	79	75	91	83	79	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76
8	85	76	71	67	84	76	71	67	75	70	67		74	70	67		73
9	81	73	68	64	80	72	67	64	71	67	64		71	67	64		70
10	78	70	64	61	77	69	64	61	68	64	61		68	64	61		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1362449
5°	1348163
10°	1325963
15°	1207390
20°	1004691
25°	713185
30°	377481
35°	153830
40°	57137
45°	26160
50°	10726
55°	5600
60°	2753
65°	827
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 26160 cd/sqm

TEST NUMBER: P769816

CATALOG NUMBER: LD6D65D010-EU6DR5055659027-6LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1161.8	15.0
10°-20°	2936.2	37.9
20°-30°	2637.5	34.1
30°-40°	825.8	10.7
40°-50°	144.6	1.9
50°-60°	28.8	0.4
60°-70°	4.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6735.6	87.0
0°-40°	7561.4	97.7
0°-60°	7734.8	99.9
0°-90°	7739.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7739.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12470	
5°	12292	###
15°	10674	2936
25°	5916	2638
35°	1153	826
45°	169	145
55°	29	29
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P769816

CATALOG NUMBER: LD6D65D010-EU6DR5055659027-6LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°
0°	12469.7
2.5°	12407.6
5°	12292.0
7.5°	12115.4
10°	11951.4
12.5°	11425.7
15°	10674.0
17.5°	9719.4
20°	8640.8
22.5°	7392.9
25°	5915.8
27.5°	4349.3
30°	2992.0
32.5°	1948.1
35°	1153.3
37.5°	662.3
40°	400.6
42.5°	260.7
45°	169.3
47.5°	103.0
50°	63.1
52.5°	43.1
55°	29.4
57.5°	20.0
60°	12.6
62.5°	7.4
65°	3.2
67.5°	1.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)