

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772766

Luminaire Tested: LD6D85BD010-EU6DR4070959024-6LBCSSQMMS

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P772766
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D85BD010-EU6DR4070959024-6LBCSSQMMS
Description: 6 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8678.1 lumens
Efficiency: N/A
Efficacy: 99.0 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 87.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P772766

CATALOG NUMBER: LD6D85BD010-EU6DR4070959024-6LBCSSQMMS

Luminous Intensity Polar Plot

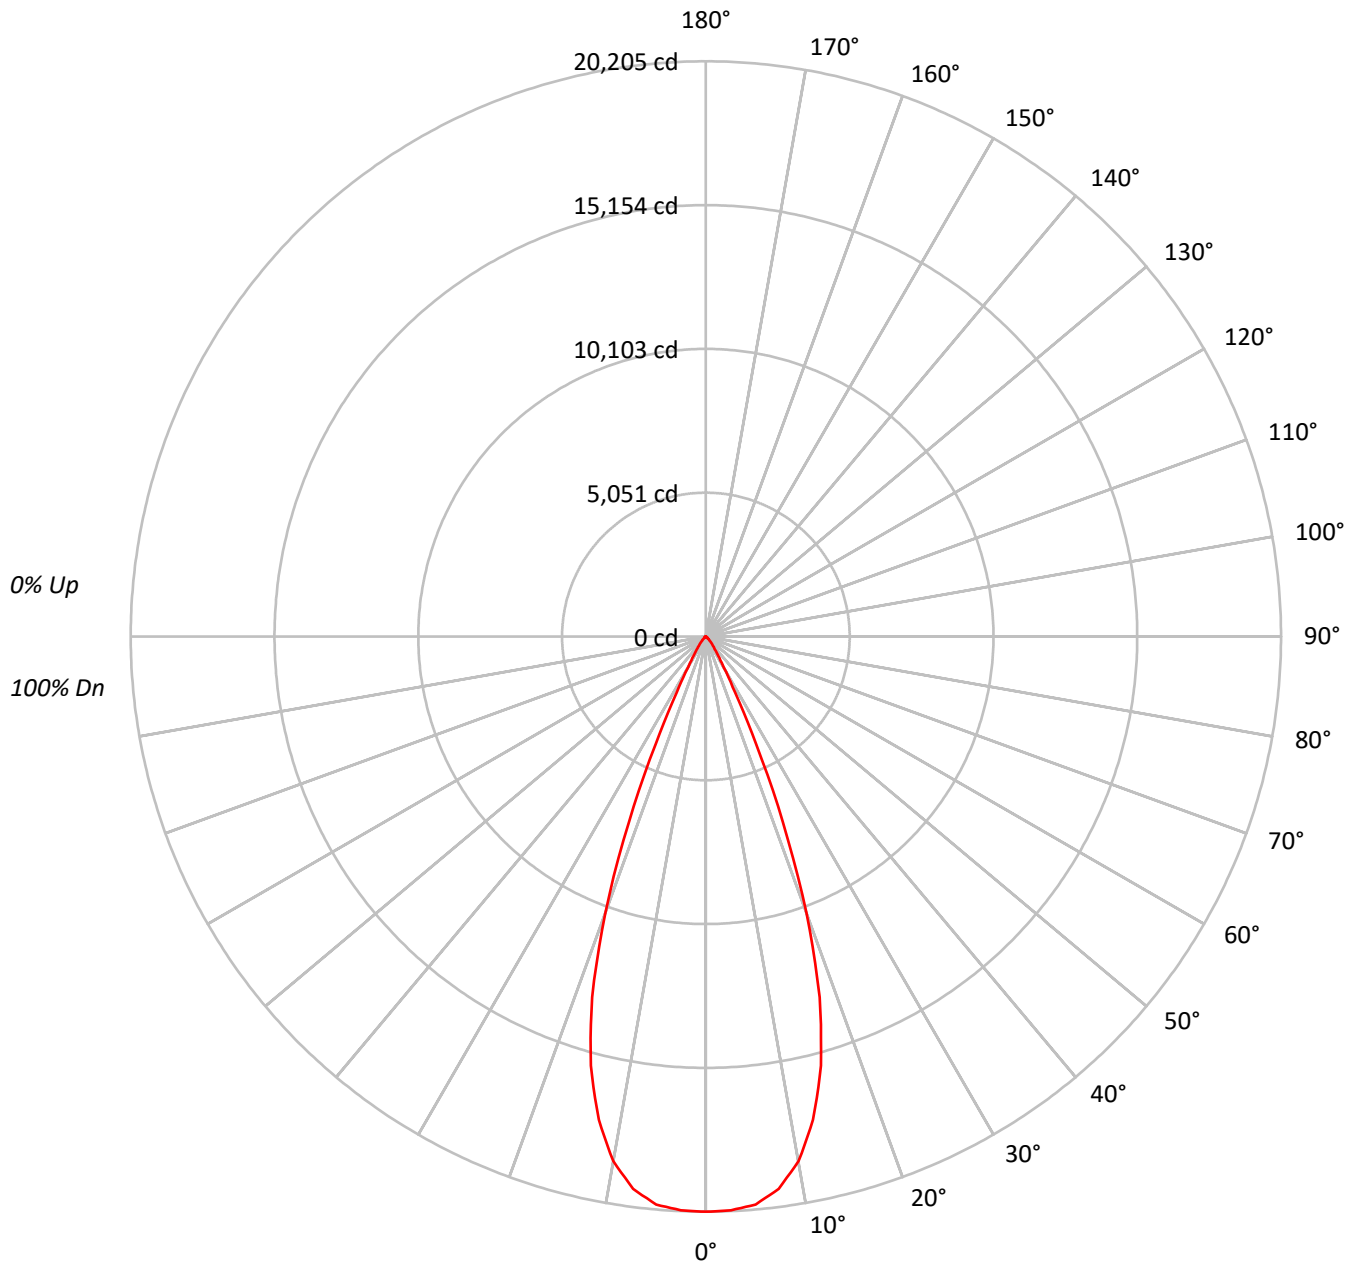



TEST NUMBER: P772766

CATALOG NUMBER: LD6D85BD010-EU6DR4070959024-6LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	112	110	108	112	110	108	107	106	105	103		103	101	100		99
2	110	106	103	100	108	105	102	99	102	99	97		99	97	95		96
3	106	101	97	94	104	100	96	93	97	94	92		95	93	90		93
4	102	97	92	89	101	95	91	88	93	90	87		92	89	86		90
5	99	92	88	84	97	91	87	84	90	86	83		88	85	83		87
6	95	88	84	80	94	88	83	80	86	82	80		85	82	79		84
7	92	85	80	77	91	84	80	77	83	79	76		82	79	76		81
8	89	82	77	74	88	81	77	74	80	76	73		79	76	73		78
9	86	79	74	71	85	78	74	71	77	73	71		76	73	70		76
10	83	76	71	68	82	75	71	68	75	71	68		74	70	68		73

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2207603
5°	2196875
10°	2076526
15°	1765308
20°	1203192
25°	502019
30°	157856
35°	73361
40°	40578
45°	18604
50°	9026
55°	4953
60°	2579
65°	905
70°	383
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 18604 cd/sqm



TEST NUMBER: P772766

CATALOG NUMBER: LD6D85BD010-EU6DR4070959024-6LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1870.3	21.6
10°-20°	4190.0	48.3
20°-30°	2097.4	24.2
30°-40°	384.5	4.4
40°-50°	106.1	1.2
50°-60°	24.9	0.3
60°-70°	4.8	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8157.7	94.0
0°-40°	8542.2	98.4
0°-60°	8673.2	99.9
0°-90°	8678.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8678.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	20205	
5°	20030	###
15°	15606	4190
25°	4164	2097
35°	550	384
45°	120	106
55°	26	25
65°	4	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P772766

CATALOG NUMBER: LD6D85BD010-EU6DR4070959024-6LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	20204.9
2.5°	20175.4
5°	20030.2
7.5°	19567.5
10°	18716.5
12.5°	17389.8
15°	15606.3
17.5°	13287.0
20°	10348.0
22.5°	7054.8
25°	4164.2
27.5°	2201.3
30°	1251.2
32.5°	808.5
35°	550.0
37.5°	393.1
40°	284.5
42.5°	194.8
45°	120.4
47.5°	76.7
50°	53.1
52.5°	37.8
55°	26.0
57.5°	16.5
60°	11.8
62.5°	7.1
65°	3.5
67.5°	2.4
70°	1.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)