

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203122

Luminaire Tested: **LD6B15D010 EU6B10208040 6LBWMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203122
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B15D010 EU6B10208040 6LBWMW1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1435.6 lumens
Efficiency: N/A
Efficacy: 100.4 lumens/watt
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.15
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203122

CATALOG NUMBER: LD6B15D010 EU6B10208040 6LBWMW1

Luminous Intensity Polar Plot

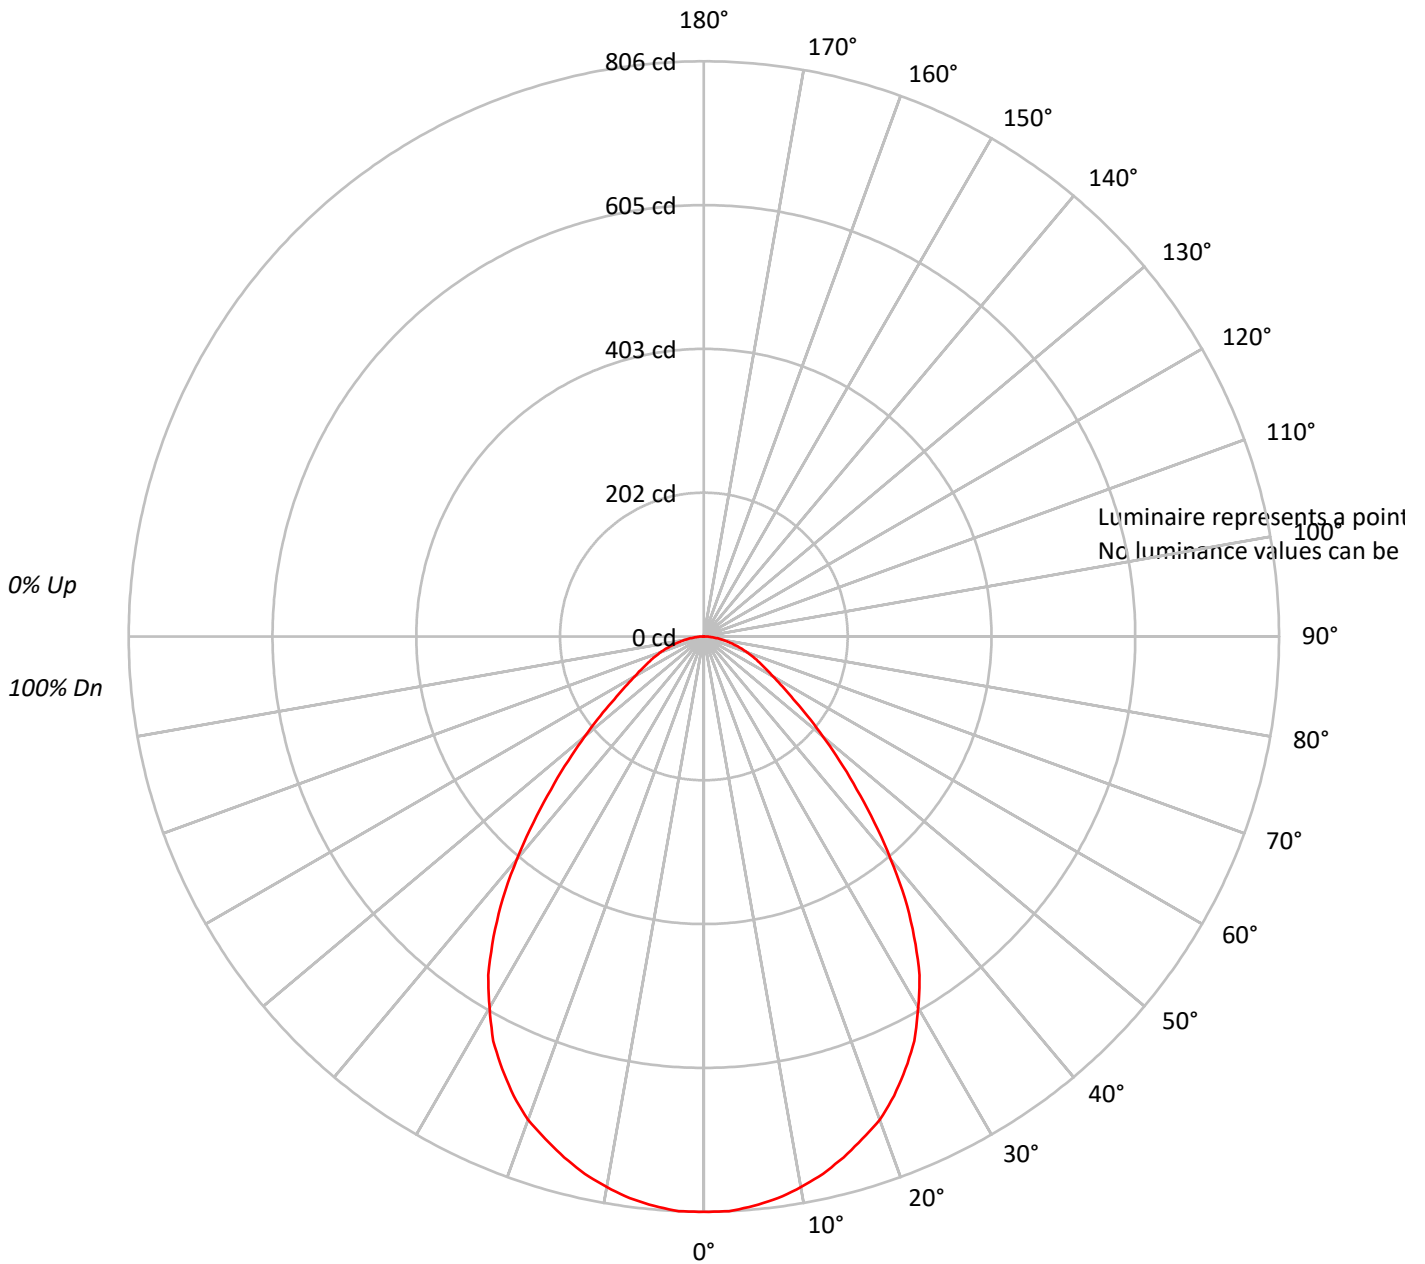



TEST NUMBER: P203122

CATALOG NUMBER: LD6B15D010 EU6B10208040 6LBWMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77			
3	95	86	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68			
4	89	78	71	65	86	77	70	65	75	69	64	72	67	63	70	66	62	60			
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	54			
6	77	65	57	52	75	64	57	52	63	56	51	61	55	51	60	54	50	49			
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44			
8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40			
9	63	51	44	39	62	51	44	39	50	43	39	49	43	38	48	42	38	37			
10	60	48	40	36	58	47	40	36	46	40	36	45	40	35	45	39	35	34			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203122

CATALOG NUMBER: LD6B15D010 EU6B10208040 6LBWMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.9	5.3
10°-20°	212.9	14.8
20°-30°	306.8	21.4
30°-40°	318.5	22.2
40°-50°	235.5	16.4
50°-60°	140.7	9.8
60°-70°	85.5	6.0
70°-80°	46.8	3.3
80°-90°	13.0	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	595.6	41.5
0°-40°	914.1	63.7
0°-60°	1290.3	89.9
0°-90°	1435.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1435.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	806	
5°	801	76
15°	756	213
25°	669	307
35°	514	319
45°	303	235
55°	153	141
65°	85	85
75°	44	47
85°	10	13
90°	0	



TEST NUMBER: P203122

CATALOG NUMBER: LD6B15D010 EU6B10208040 6LBMMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	806.2
2.5°	806.2
5°	801.0
7.5°	794.0
10°	783.5
12.5°	771.4
15°	755.7
17.5°	738.3
20°	720.9
22.5°	696.5
25°	668.6
27.5°	639.0
30°	600.7
32.5°	562.4
35°	513.7
37.5°	463.2
40°	407.4
42.5°	353.5
45°	303.0
47.5°	257.7
50°	217.7
52.5°	182.8
55°	153.2
57.5°	130.6
60°	111.4
62.5°	97.5
65°	85.3
67.5°	74.9
70°	64.4
72.5°	54.0
75°	43.5
77.5°	34.8
80°	26.1
82.5°	19.2
85°	10.4
87.5°	5.2
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)