

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204167

Luminaire Tested: **LD6B20D010 EU6B10209024 6LBSH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204167
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B20D010 EU6B10209024 6LBSH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1533.5 lumens
Efficiency: N/A
Efficacy: 73.7 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204167

CATALOG NUMBER: LD6B20D010 EU6B10209024 6LBSH1

Luminous Intensity Polar Plot

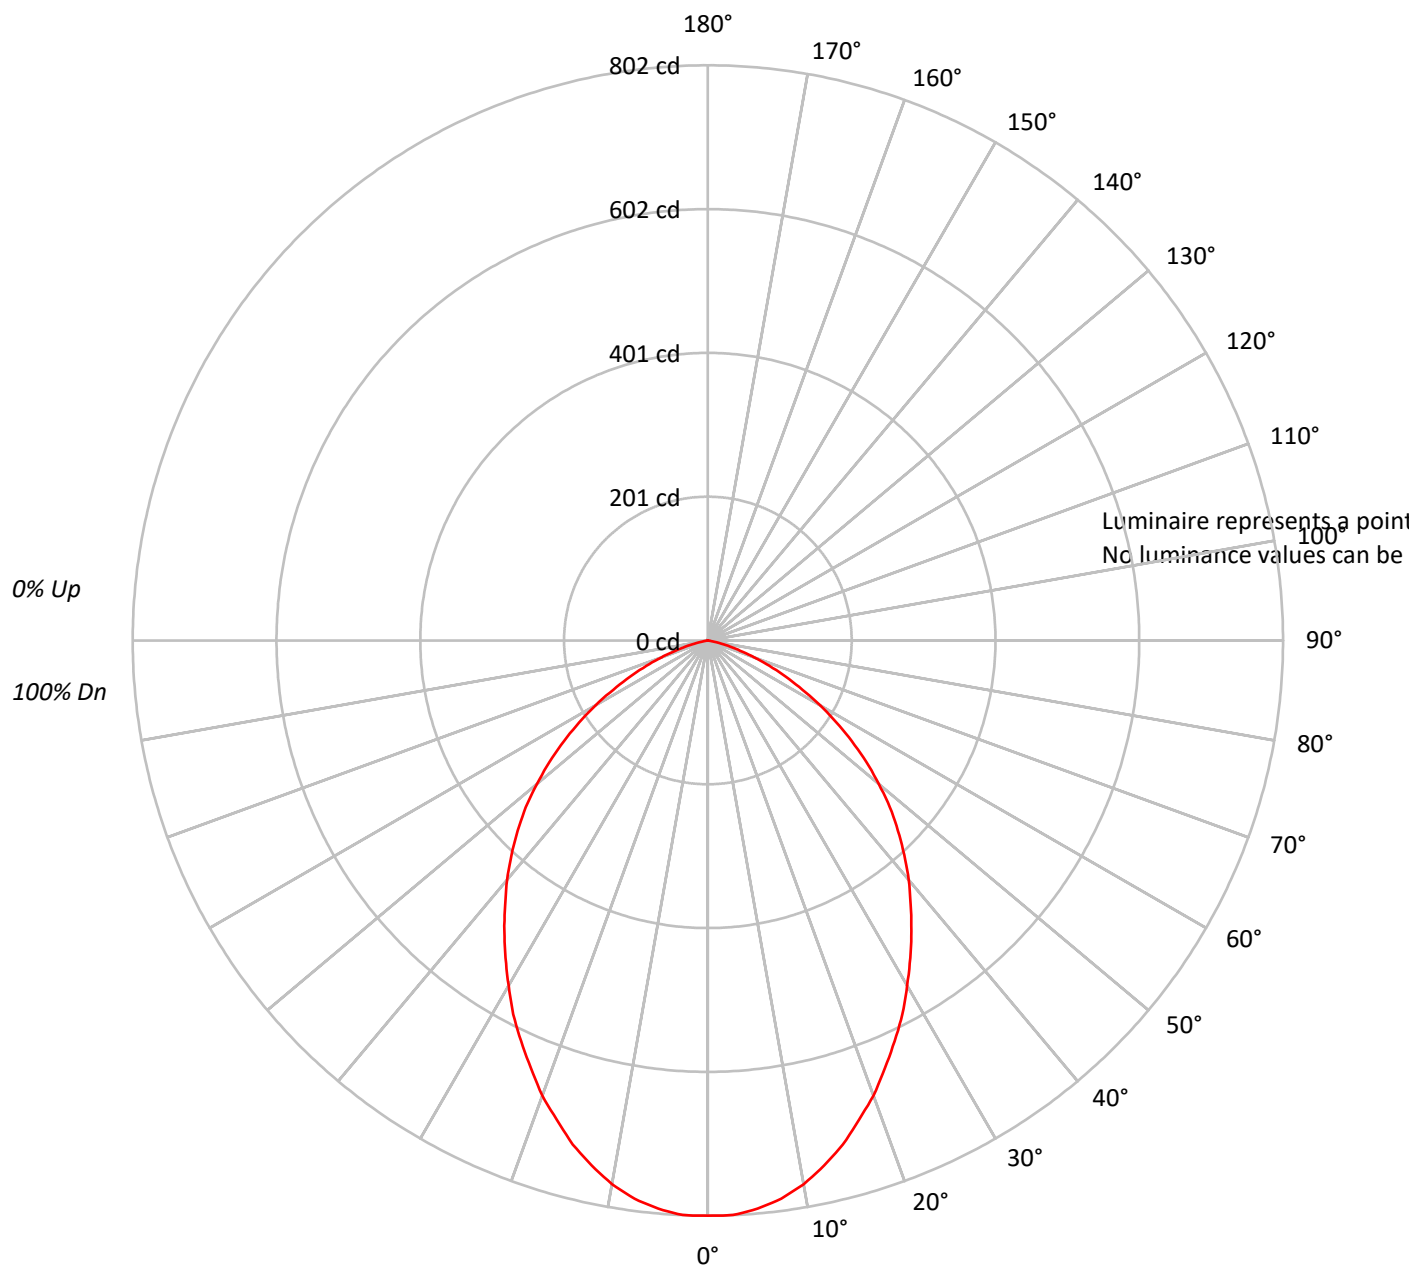



TEST NUMBER: P204167

CATALOG NUMBER: LD6B20D010 EU6B10209024 6LBSH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	104	101	108	105	102	99		101	98	96		97	95	93		93	92	90
2	102	96	90	85	100	94	88	84		90	86	82		87	83	80		84	81	79
3	95	85	78	73	92	84	77	72		81	75	71		78	74	70		76	72	69
4	87	77	69	63	85	75	68	63		73	67	62		71	65	61		69	64	60
5	81	69	61	55	79	68	61	55		66	60	55		64	59	54		63	58	53
6	75	63	55	49	73	62	54	49		60	54	49		59	53	48		57	52	48
7	70	58	50	44	68	57	49	44		55	49	44		54	48	43		53	47	43
8	65	53	45	40	64	52	45	40		51	44	39		50	44	39		49	43	39
9	61	49	41	36	60	48	41	36		47	40	36		46	40	36		45	40	35
10	58	45	38	33	56	45	38	33		44	37	33		43	37	33		42	37	33

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204167

CATALOG NUMBER: LD6B20D010 EU6B10209024 6LBSH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.1	4.9
10°-20°	204.2	13.3
20°-30°	283.6	18.5
30°-40°	309.4	20.2
40°-50°	288.6	18.8
50°-60°	219.1	14.3
60°-70°	120.0	7.8
70°-80°	33.0	2.2
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	562.9	36.7
0°-40°	872.3	56.9
0°-60°	1380.0	90.0
0°-90°	1533.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1533.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	802	
5°	795	75
15°	728	204
25°	616	284
35°	495	309
45°	375	289
55°	245	219
65°	120	120
75°	29	33
85°	0	0
90°	0	



TEST NUMBER: P204167

CATALOG NUMBER: LD6B20D010 EU6B10209024 6LBSH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	802.0
2.5°	802.0
5°	795.3
7.5°	785.1
10°	769.9
12.5°	749.7
15°	727.7
17.5°	700.7
20°	675.4
22.5°	645.0
25°	616.3
27.5°	587.6
30°	555.5
32.5°	525.1
35°	494.7
37.5°	464.3
40°	435.6
42.5°	405.2
45°	374.8
47.5°	344.4
50°	310.7
52.5°	278.6
55°	244.8
57.5°	212.7
60°	180.7
62.5°	148.6
65°	119.9
67.5°	92.9
70°	69.2
72.5°	47.3
75°	28.7
77.5°	13.5
80°	3.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)