

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202725

Luminaire Tested: **LD6B20D010 EU6B10209024 6LBWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202725
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B20D010 EU6B10209024 6LBWH1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1302.3 lumens
Efficiency: N/A
Efficacy: 62.6 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202725

CATALOG NUMBER: LD6B20D010 EU6B10209024 6LBWH1

Luminous Intensity Polar Plot

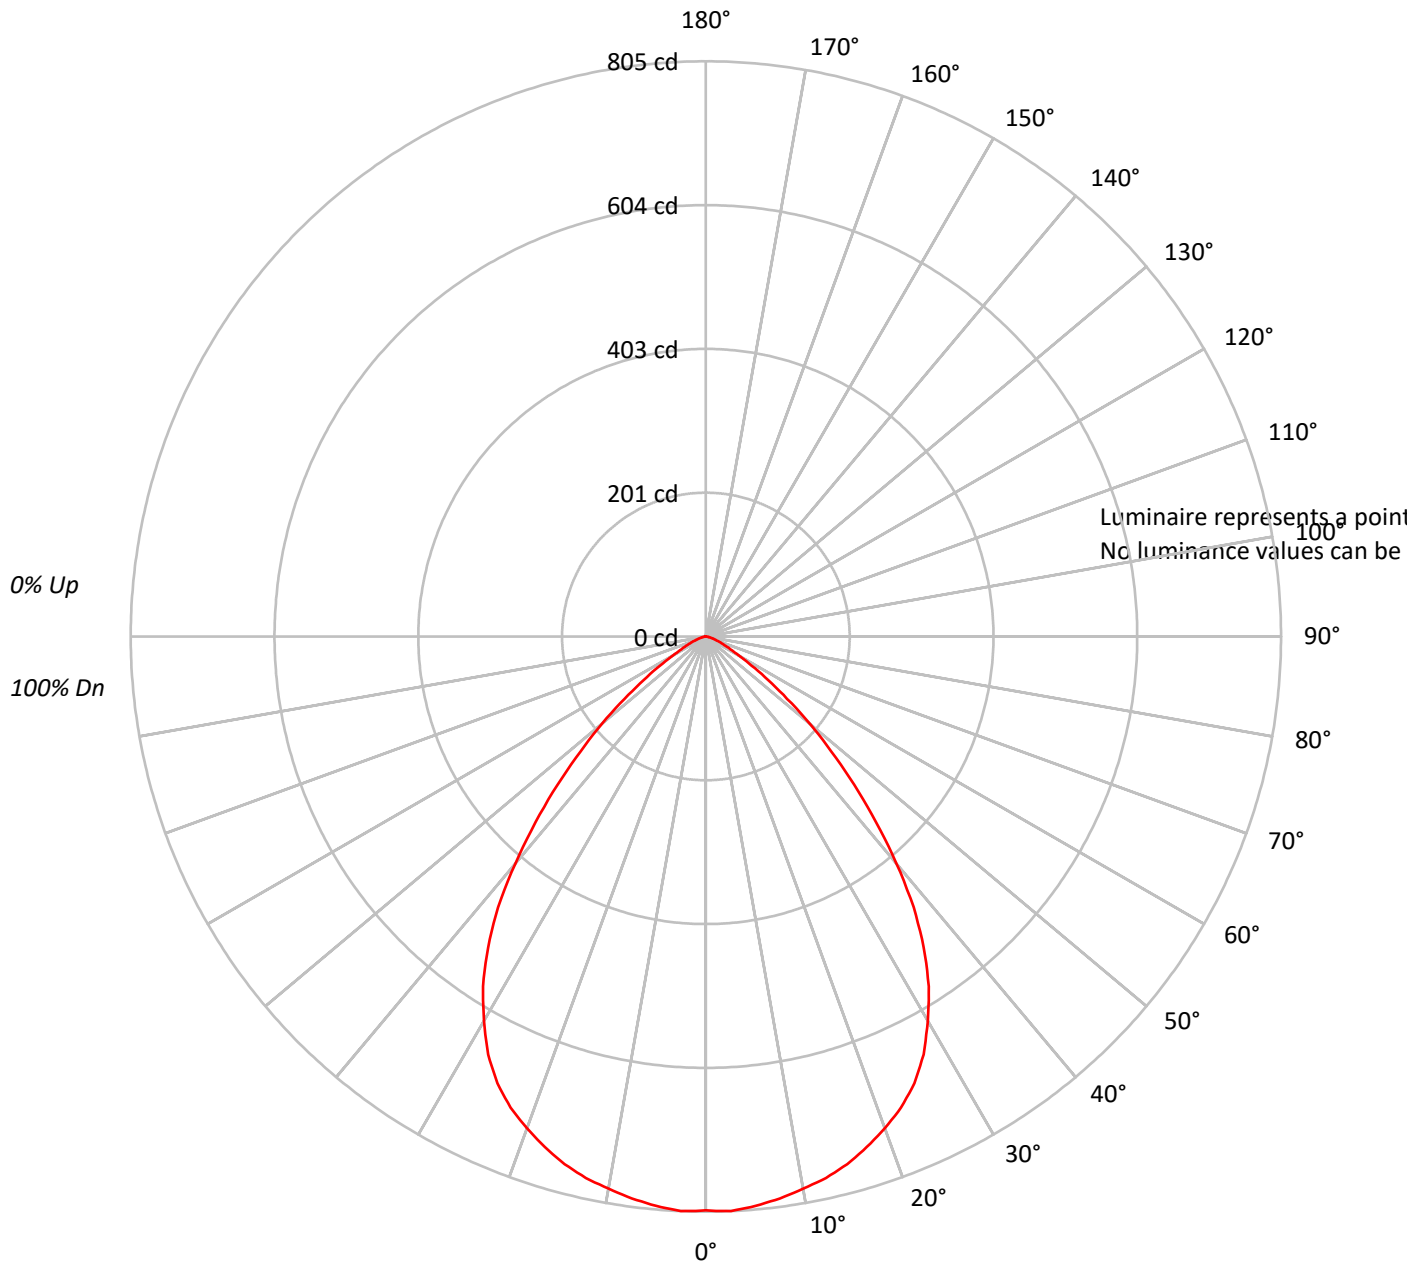



TEST NUMBER: P202725

CATALOG NUMBER: LD6B20D010 EU6B10209024 6LBWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	103	100	98		99	97	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	98	90	84	79	96	89	83	78	86	81	77		83	79	76		81
4	92	82	75	70	90	81	75	70	79	73	69		77	72	68		75
5	86	75	68	63	84	74	68	63	72	66	62		71	65	61		69
6	80	69	62	57	78	68	61	56	67	61	56		65	60	56		64
7	75	64	56	51	73	63	56	51	62	55	51		60	55	51		59
8	70	59	52	47	69	58	51	47	57	51	46		56	50	46		55
9	66	55	48	43	65	54	47	43	53	47	43		52	47	42		51
10	62	51	44	40	61	50	44	39	50	43	39		49	43	39		48

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202725

CATALOG NUMBER: LD6B20D010 EU6B10209024 6LBWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.9	5.8
10°-20°	215.3	16.5
20°-30°	315.6	24.2
30°-40°	328.5	25.2
40°-50°	227.3	17.5
50°-60°	98.9	7.6
60°-70°	30.3	2.3
70°-80°	9.1	0.7
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	606.8	46.6
0°-40°	935.3	71.8
0°-60°	1261.5	96.9
0°-90°	1302.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1302.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	803	
5°	800	76
15°	764	215
25°	690	316
35°	532	329
45°	294	227
55°	106	99
65°	29	30
75°	8	9
85°	2	1
90°	0	



TEST NUMBER: P202725

CATALOG NUMBER: LD6B20D010 EU6B10209024 6LBWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	803.3
2.5°	805.0
5°	799.9
7.5°	793.2
10°	784.7
12.5°	776.3
15°	764.5
17.5°	749.3
20°	732.4
22.5°	713.8
25°	690.2
27.5°	659.8
30°	621.0
32.5°	580.5
35°	531.6
37.5°	477.6
40°	415.1
42.5°	352.7
45°	293.6
47.5°	237.9
50°	189.0
52.5°	143.4
55°	106.3
57.5°	75.9
60°	52.3
62.5°	38.8
65°	28.7
67.5°	21.9
70°	15.2
72.5°	11.8
75°	8.4
77.5°	5.1
80°	3.4
82.5°	1.7
85°	1.7
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)