

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203250

Luminaire Tested: **LD6B30D010 EU6B30508035 6LBMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203250
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B30D010 EU6B30508035 6LBMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2213.5 lumens
Efficiency: N/A
Efficacy: 79.1 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203250

CATALOG NUMBER: LD6B30D010 EU6B30508035 6LBMH1

Luminous Intensity Polar Plot

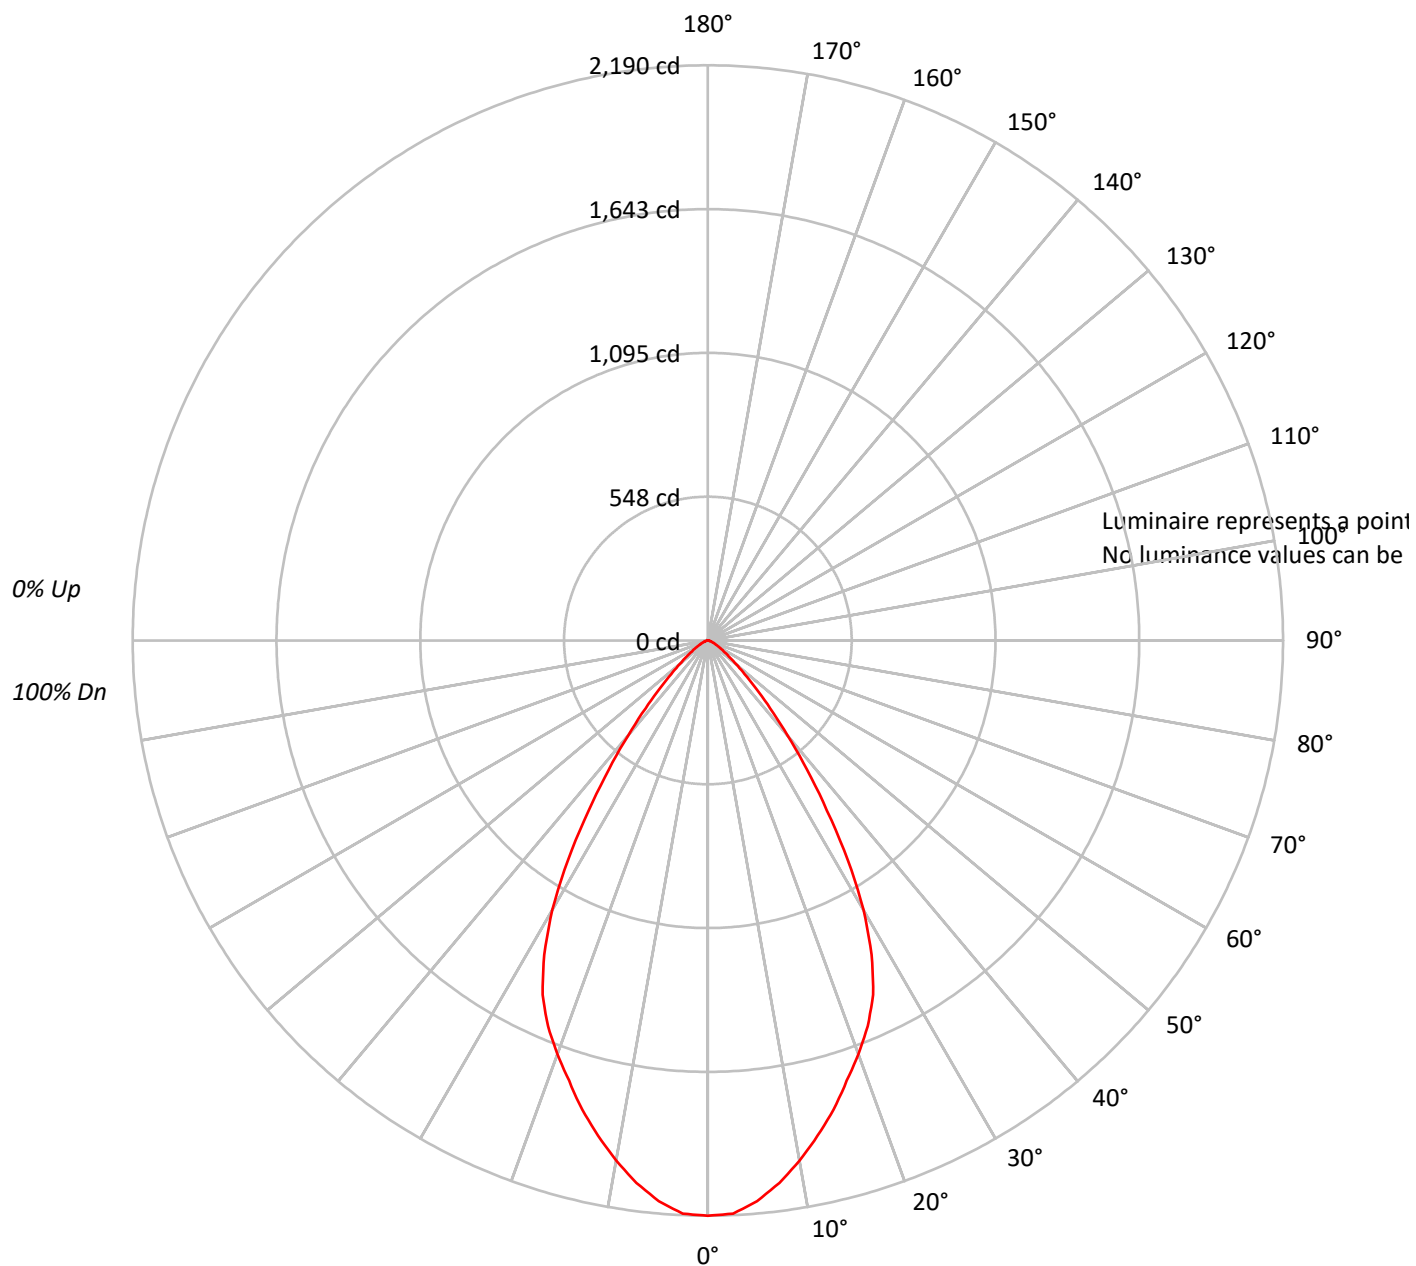




TEST NUMBER: P203250

CATALOG NUMBER: LD6B30D010 EU6B30508035 6LBMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	113	110	107	105	111	108	105	103		104	102	100			100	99	97			97
2	107	102	97	93	105	100	96	92		97	93	90			94	91	88			91
3	101	94	88	84	99	92	87	84		90	86	82			87	84	81			85
4	95	87	81	76	93	86	80	76		84	79	75			82	78	74			80
5	90	81	75	70	88	80	74	70		78	73	69			76	72	68			75
6	85	75	69	64	83	75	69	64		73	68	64			72	67	63			70
7	80	70	64	59	79	70	64	59		68	63	59			67	62	59			66
8	76	66	60	55	75	65	59	55		64	59	55			63	58	55			62
9	72	62	56	51	71	61	55	51		60	55	51			60	55	51			59
10	69	58	52	48	68	58	52	48		57	52	48			56	51	48			55

AVERAGE LUMINANCE (cd/sqm):

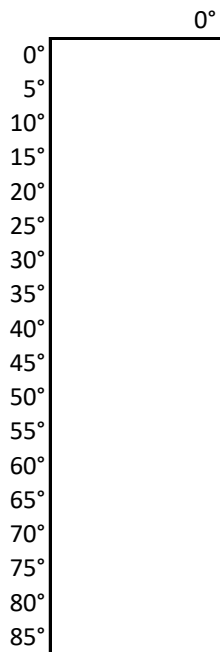



TEST NUMBER: P203250

CATALOG NUMBER: LD6B30D010 EU6B30508035 6LBMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	200.3	9.0
10°-20°	518.1	23.4
20°-30°	671.4	30.3
30°-40°	498.4	22.5
40°-50°	210.4	9.5
50°-60°	74.7	3.4
60°-70°	28.8	1.3
70°-80°	10.0	0.5
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1389.8	62.8
0°-40°	1888.2	85.3
0°-60°	2173.4	98.2
0°-90°	2213.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2213.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2190	
5°	2143	200
15°	1849	518
25°	1489	671
35°	790	498
45°	259	210
55°	79	75
65°	28	29
75°	10	10
85°	0	1
90°	0	



TEST NUMBER: P203250

CATALOG NUMBER: LD6B30D010 EU6B30508035 6LBMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2190.5
2.5°	2184.2
5°	2143.1
7.5°	2083.0
10°	2010.3
12.5°	1931.3
15°	1849.1
17.5°	1757.5
20°	1675.3
22.5°	1589.9
25°	1488.8
27.5°	1349.7
30°	1185.3
32.5°	992.5
35°	790.2
37.5°	619.5
40°	471.0
42.5°	350.9
45°	259.2
47.5°	189.7
50°	139.1
52.5°	104.3
55°	79.0
57.5°	60.1
60°	47.4
62.5°	34.8
65°	28.4
67.5°	22.1
70°	15.8
72.5°	12.6
75°	9.5
77.5°	6.3
80°	3.2
82.5°	3.2
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)