

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204590

Luminaire Tested: **LD6B30D010 EU6B30508035 6LBSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204590
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B30D010 EU6B30508035 6LBSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3289.0 lumens
Efficiency: N/A
Efficacy: 117.5 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204590

CATALOG NUMBER: LD6B30D010 EU6B30508035 6LBSMW1

Luminous Intensity Polar Plot

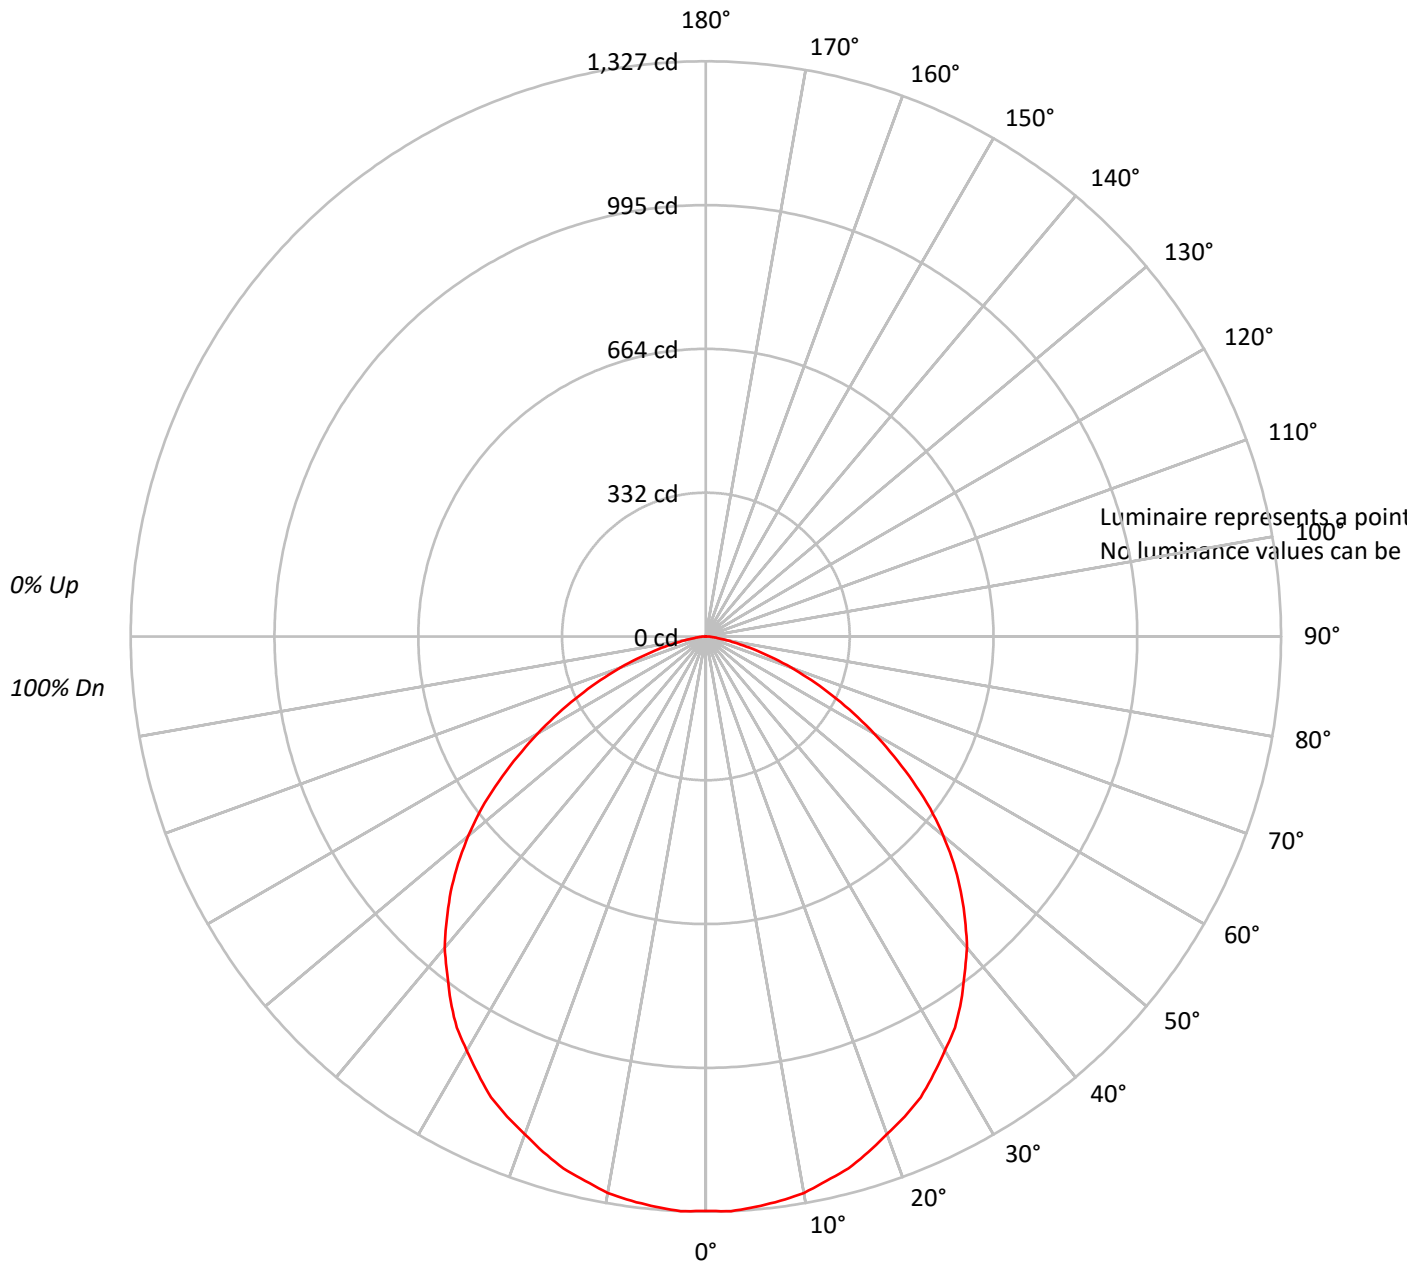




TEST NUMBER: P204590

CATALOG NUMBER: LD6B30D010 EU6B30508035 6LBSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	99	107	104	100	97	99	97	94		96	93	91		92
2	101	93	87	82	98	92	86	81	88	83	79		85	81	77		82
3	93	83	75	69	90	81	74	69	78	72	67		76	70	66		73
4	85	74	66	59	83	72	65	59	70	63	58		68	62	57		66
5	78	66	58	51	76	65	57	51	63	56	51		61	55	50		59
6	73	60	51	45	71	59	51	45	57	50	44		55	49	44		54
7	67	54	46	40	66	54	46	40	52	45	40		51	44	39		49
8	63	50	41	36	61	49	41	36	48	41	35		46	40	35		45
9	59	46	38	32	57	45	37	32	44	37	32		43	36	32		42
10	55	42	34	29	54	42	34	29	41	34	29		40	33	29		39

AVERAGE LUMINANCE (cd/sqm):

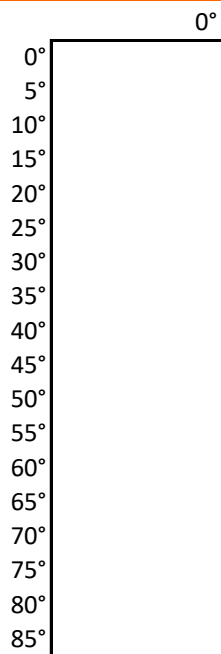



TEST NUMBER: P204590

CATALOG NUMBER: LD6B30D010 EU6B30508035 6LBSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.6	3.8
10°-20°	357.9	10.9
20°-30°	539.0	16.4
30°-40°	641.4	19.5
40°-50°	640.2	19.5
50°-60°	520.7	15.8
60°-70°	320.3	9.7
70°-80°	124.1	3.8
80°-90°	19.9	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1022.5	31.1
0°-40°	1663.8	50.6
0°-60°	2824.7	85.9
0°-90°	3289.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3289.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1325	
5°	1321	126
15°	1271	358
25°	1173	539
35°	1027	641
45°	832	640
55°	583	521
65°	322	320
75°	113	124
85°	16	20
90°	0	



TEST NUMBER: P204590

CATALOG NUMBER: LD6B30D010 EU6B30508035 6LBSMW1

CANDELA DISTRIBUTION (FULL):

0°	
0°	1325.1
2.5°	1327.1
5°	1321.2
7.5°	1313.4
10°	1303.7
12.5°	1286.2
15°	1270.6
17.5°	1247.2
20°	1221.8
22.5°	1198.5
25°	1173.1
27.5°	1138.1
30°	1103.0
32.5°	1069.8
35°	1027.0
37.5°	980.2
40°	937.3
42.5°	884.7
45°	832.1
47.5°	775.6
50°	715.2
52.5°	652.8
55°	582.7
57.5°	514.5
60°	448.2
62.5°	383.9
65°	321.5
67.5°	263.1
70°	208.5
72.5°	157.8
75°	113.0
77.5°	74.1
80°	44.8
82.5°	27.3
85°	15.6
87.5°	7.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)