

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205110

Luminaire Tested: **LD6B30D010 EU6B30509035 6LBMLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205110
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B30D010 EU6B30509035 6LBMLI1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2290.5 lumens
Efficiency: N/A
Efficacy: 81.8 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205110

CATALOG NUMBER: LD6B30D010 EU6B30509035 6LBMLI1

Luminous Intensity Polar Plot

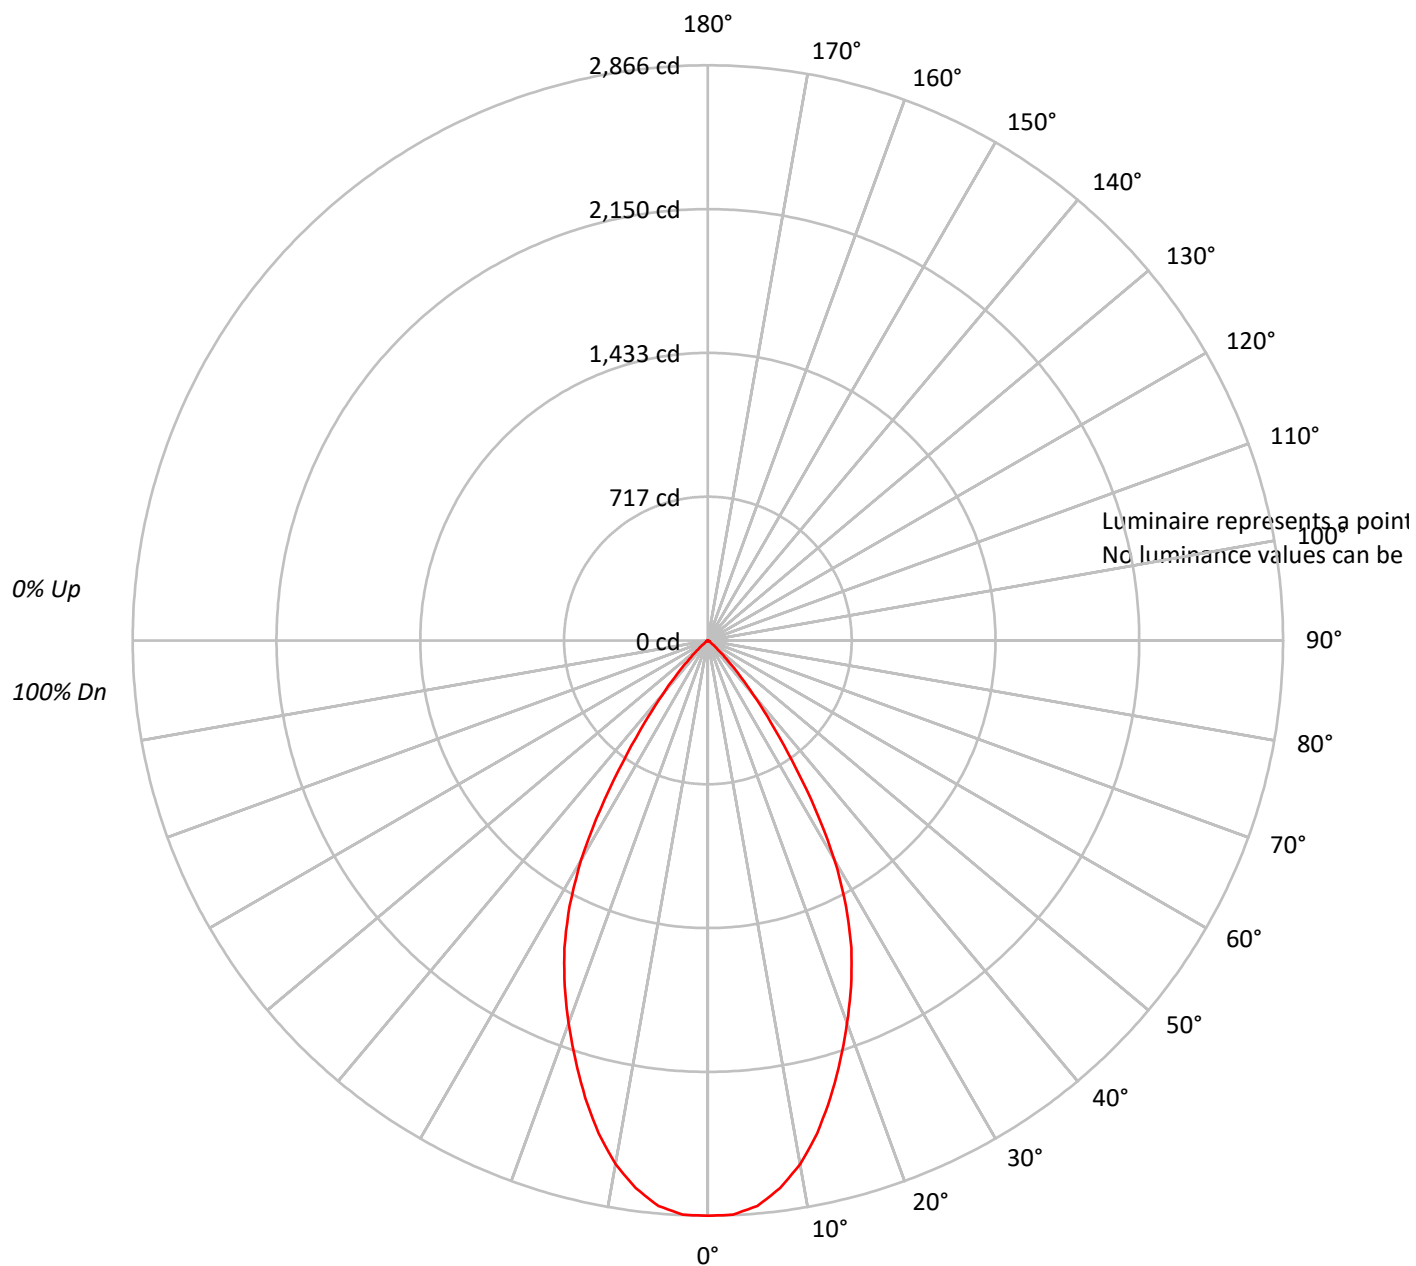



TEST NUMBER: P205110

CATALOG NUMBER: LD6B30D010 EU6B30509035 6LBMLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	109	106		111	109	107	105		105	103	101		101	100	98		98	97	96
2	108	103	100	96		106	102	98	95		99	96	93		96	93	91		93	91	89
3	103	97	92	88		101	95	91	87		93	89	86		90	87	85		88	85	83
4	98	91	85	81		96	89	84	81		87	83	80		85	82	79		83	80	78
5	93	85	79	75		91	84	79	75		82	78	74		81	77	73		79	76	73
6	89	80	74	70		87	79	74	70		78	73	69		76	72	69		75	71	68
7	84	75	69	65		83	75	69	65		73	68	65		72	68	64		71	67	64
8	80	71	65	61		79	70	65	61		69	64	61		68	64	60		67	63	60
9	77	67	61	57		75	67	61	57		66	61	57		65	60	57		64	60	57
10	73	64	58	54		72	63	58	54		62	57	54		62	57	54		61	57	54

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205110

CATALOG NUMBER: LD6B30D010 EU6B30509035 6LBMLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	264.1	11.5
10°-20°	657.4	28.7
20°-30°	764.2	33.4
30°-40°	468.0	20.4
40°-50°	116.2	5.1
50°-60°	13.6	0.6
60°-70°	5.1	0.2
70°-80°	1.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1685.7	73.6
0°-40°	2153.7	94.0
0°-60°	2283.5	99.7
0°-90°	2290.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2290.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2866	
5°	2828	264
15°	2359	657
25°	1691	764
35°	733	468
45°	129	116
55°	12	14
65°	6	5
75°	3	2
85°	0	0
90°	0	



TEST NUMBER: P205110

CATALOG NUMBER: LD6B30D010 EU6B30509035 6LBMLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2866.5
2.5°	2863.5
5°	2828.4
7.5°	2752.2
10°	2649.6
12.5°	2514.8
15°	2359.4
17.5°	2192.4
20°	2028.2
22.5°	1864.1
25°	1691.2
27.5°	1491.9
30°	1263.2
32.5°	996.5
35°	732.7
37.5°	515.8
40°	351.7
42.5°	219.8
45°	129.0
47.5°	73.3
50°	38.1
52.5°	17.6
55°	11.7
57.5°	8.8
60°	8.8
62.5°	5.9
65°	5.9
67.5°	2.9
70°	2.9
72.5°	2.9
75°	2.9
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)