

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202543

Luminaire Tested: **LD6B40D010 EU6B30508040 6LBSWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202543
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B40D010 EU6B30508040 6LBSWMH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WARM HAZE TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4547.7 lumens
Efficiency: N/A
Efficacy: 108.8 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 1.1
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202543

CATALOG NUMBER: LD6B40D010 EU6B30508040 6LBSWMH1

Luminous Intensity Polar Plot

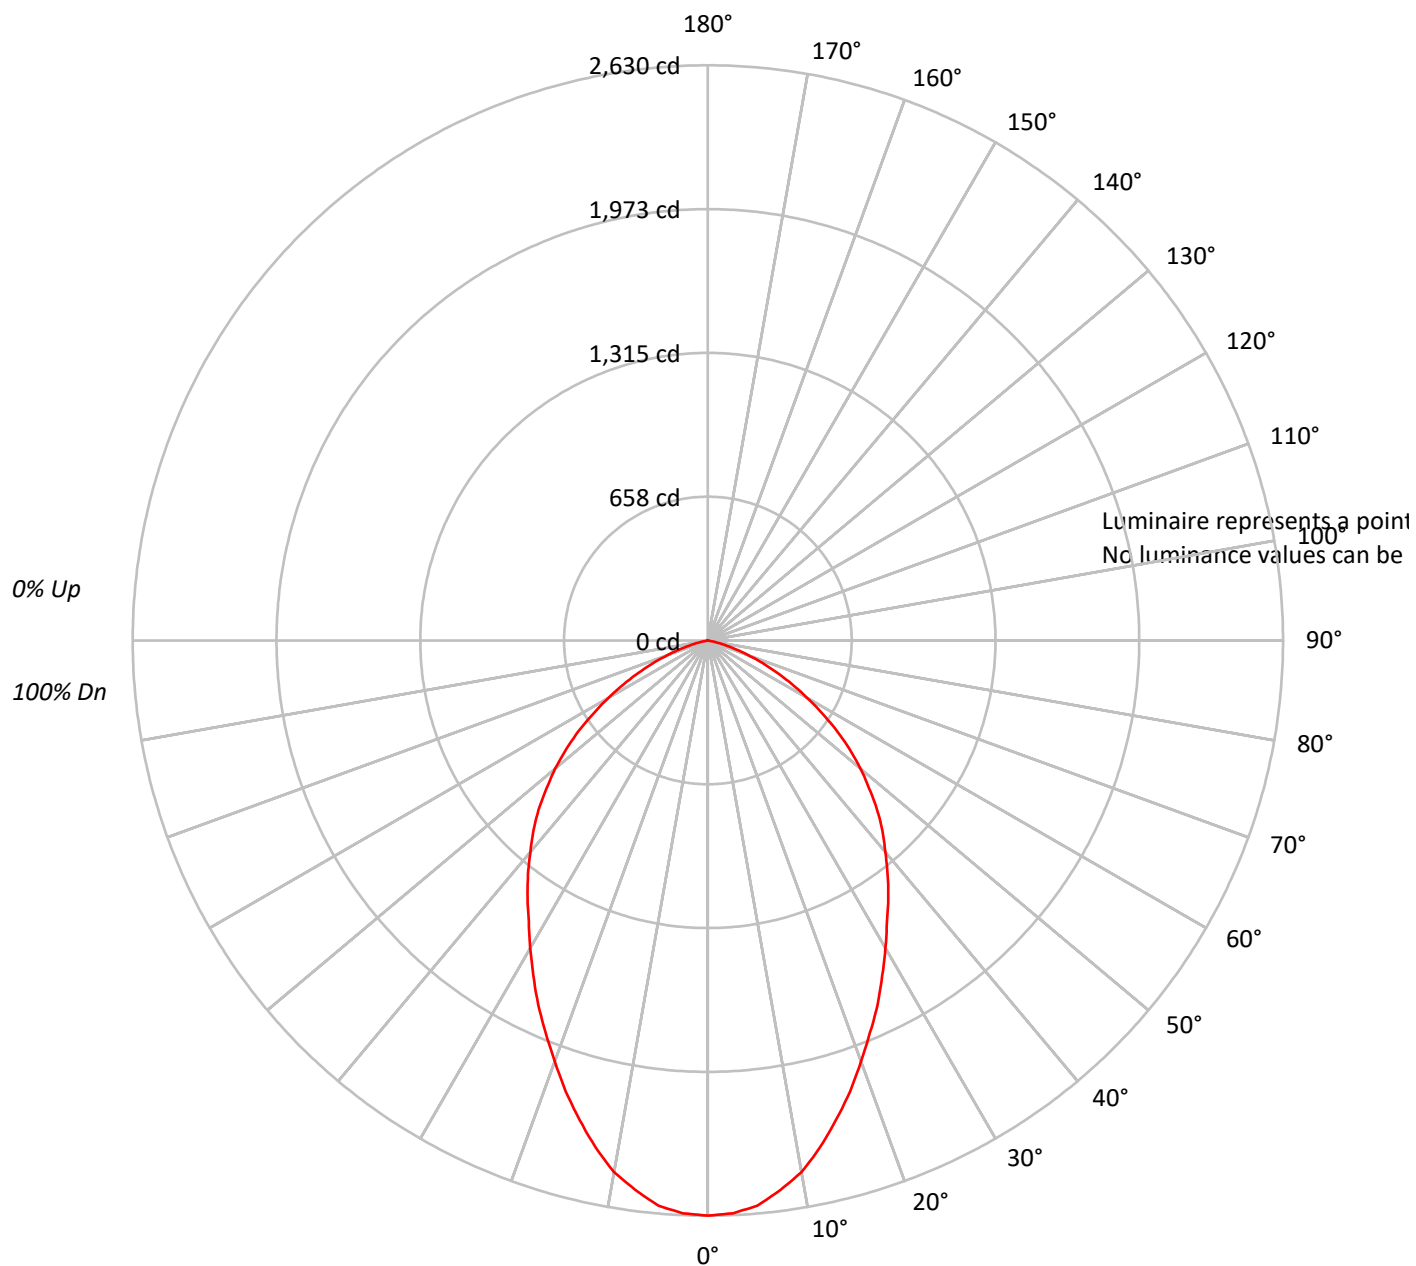



TEST NUMBER: P202543

CATALOG NUMBER: LD6B40D010 EU6B30508040 6LBSWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	111	107	104	101	108	105	102	99	101	98	96		97	95	93		94
2	103	96	90	85	100	94	89	84	91	86	82		87	84	81		84
3	95	86	79	73	92	84	78	73	81	76	71		79	74	70		76
4	88	77	70	64	86	76	69	63	74	67	62		71	66	62		69
5	81	70	62	56	79	69	61	56	67	60	55		65	59	55		63
6	76	64	56	50	74	63	55	50	61	54	49		59	53	49		58
7	70	58	50	45	69	57	50	45	56	49	44		55	48	44		53
8	66	54	46	40	64	53	45	40	52	45	40		50	44	40		49
9	62	49	42	37	61	49	42	37	48	41	37		47	41	36		46
10	58	46	39	34	57	45	38	34	45	38	34		44	38	33		43

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202543

CATALOG NUMBER: LD6B40D010 EU6B30508040 6LBSWMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	243.3	5.4
10°-20°	636.0	14.0
20°-30°	843.4	18.5
30°-40°	899.5	19.8
40°-50°	840.9	18.5
50°-60°	641.1	14.1
60°-70°	348.8	7.7
70°-80°	93.6	2.1
80°-90°	1.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1722.7	37.9
0°-40°	2622.2	57.7
0°-60°	4104.3	90.2
0°-90°	4547.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4547.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2630	
5°	2594	243
15°	2268	636
25°	1836	843
35°	1438	900
45°	1095	841
55°	722	641
65°	348	349
75°	81	94
85°	0	1
90°	0	



TEST NUMBER: P202543

CATALOG NUMBER: LD6B40D010 EU6B30508040 6LBSWMH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	2629.8
2.5°	2621.4
5°	2593.6
7.5°	2535.1
10°	2468.2
12.5°	2373.5
15°	2267.6
17.5°	2161.8
20°	2047.6
22.5°	1938.9
25°	1835.8
27.5°	1727.2
30°	1624.1
32.5°	1523.8
35°	1437.5
37.5°	1351.1
40°	1262.0
42.5°	1181.2
45°	1094.8
47.5°	1000.1
50°	911.0
52.5°	816.2
55°	721.5
57.5°	618.4
60°	523.7
62.5°	434.6
65°	348.2
67.5°	270.2
70°	197.8
72.5°	136.5
75°	80.8
77.5°	36.2
80°	8.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)