

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204300

Luminaire Tested: **LD6B40D010 EU6B30509040 6LBSWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204300
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B40D010 EU6B30509040 6LBSWH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3796.0 lumens
Efficiency: N/A
Efficacy: 90.8 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204300

CATALOG NUMBER: LD6B40D010 EU6B30509040 6LBSWH1

Luminous Intensity Polar Plot

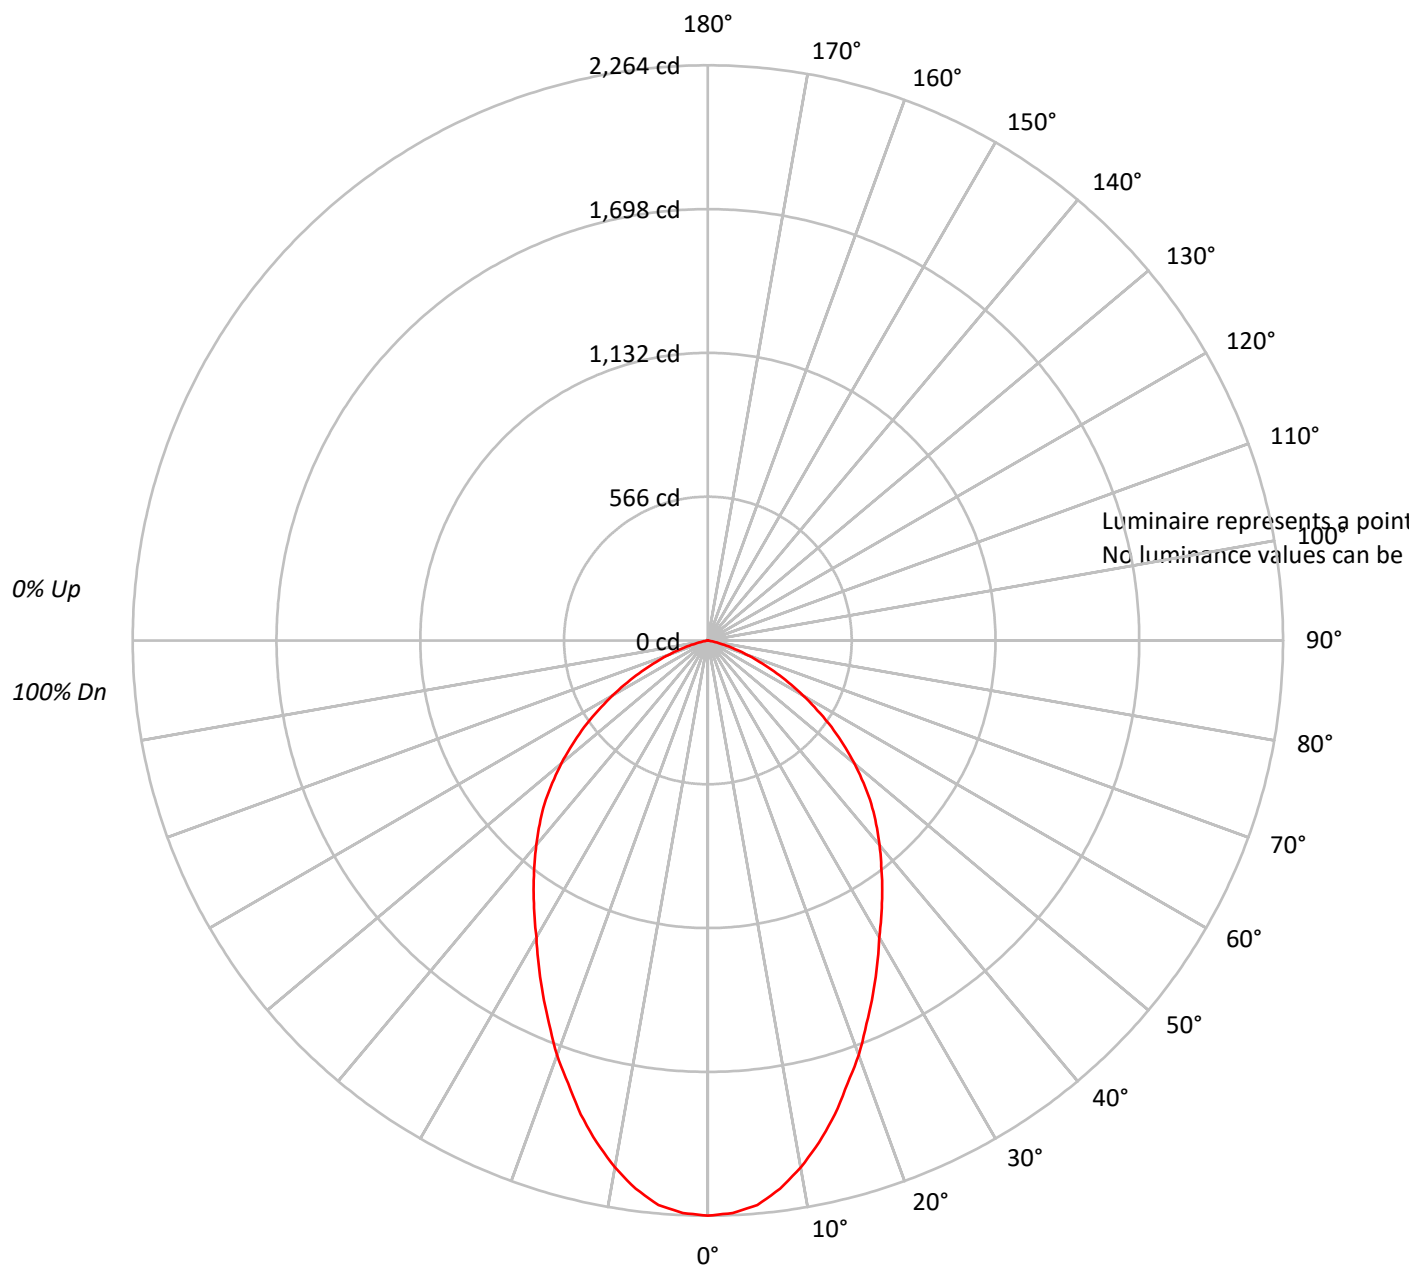



TEST NUMBER: P204300

CATALOG NUMBER: LD6B40D010 EU6B30509040 6LBSWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	111	107	104	101	108	105	102	99		101	98	96			97	95	93			94
2	103	96	90	85	100	94	89	84		91	86	83			87	84	81			85
3	95	86	79	73	93	84	78	73		82	76	72			79	74	70			76
4	88	77	70	64	86	76	69	63		74	68	63			72	66	62			69
5	81	70	62	56	79	69	62	56		67	60	55			65	59	55			63
6	76	64	56	50	74	63	55	50		61	54	49			60	54	49			58
7	71	58	51	45	69	58	50	45		56	49	45			55	49	44			54
8	66	54	46	41	65	53	46	41		52	45	40			51	45	40			50
9	62	50	42	37	61	49	42	37		48	41	37			47	41	37			46
10	58	46	39	34	57	46	39	34		45	38	34			44	38	34			43

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204300

CATALOG NUMBER: LD6B40D010 EU6B30509040 6LBSWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	208.8	5.5
10°-20°	540.5	14.2
20°-30°	706.9	18.6
30°-40°	748.5	19.7
40°-50°	698.2	18.4
50°-60°	528.8	13.9
60°-70°	286.4	7.5
70°-80°	76.9	2.0
80°-90°	1.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1456.2	38.4
0°-40°	2204.7	58.1
0°-60°	3431.6	90.4
0°-90°	3796.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3796.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2264	
5°	2231	209
15°	1932	540
25°	1537	707
35°	1196	749
45°	910	698
55°	594	529
65°	287	286
75°	66	77
85°	0	1
90°	0	



TEST NUMBER: P204300

CATALOG NUMBER: LD6B40D010 EU6B30509040 6LBSWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2263.9
2.5°	2255.6
5°	2230.7
7.5°	2176.7
10°	2106.1
12.5°	2023.0
15°	1931.6
17.5°	1827.7
20°	1736.4
22.5°	1632.5
25°	1537.0
27.5°	1441.4
30°	1350.0
32.5°	1271.1
35°	1196.3
37.5°	1121.6
40°	1051.0
42.5°	980.3
45°	909.7
47.5°	830.8
50°	751.9
52.5°	672.9
55°	594.0
57.5°	510.9
60°	432.0
62.5°	357.2
65°	286.6
67.5°	220.2
70°	162.0
72.5°	112.2
75°	66.5
77.5°	29.1
80°	8.3
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)