

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202858

Luminaire Tested: **LD6B40D010 EU6B30509040 6LBWWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202858
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B40D010 EU6B30509040 6LBWWH1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3314.2 lumens
Efficiency: N/A
Efficacy: 79.3 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202858

CATALOG NUMBER: LD6B40D010 EU6B30509040 6LBWWH1

Luminous Intensity Polar Plot

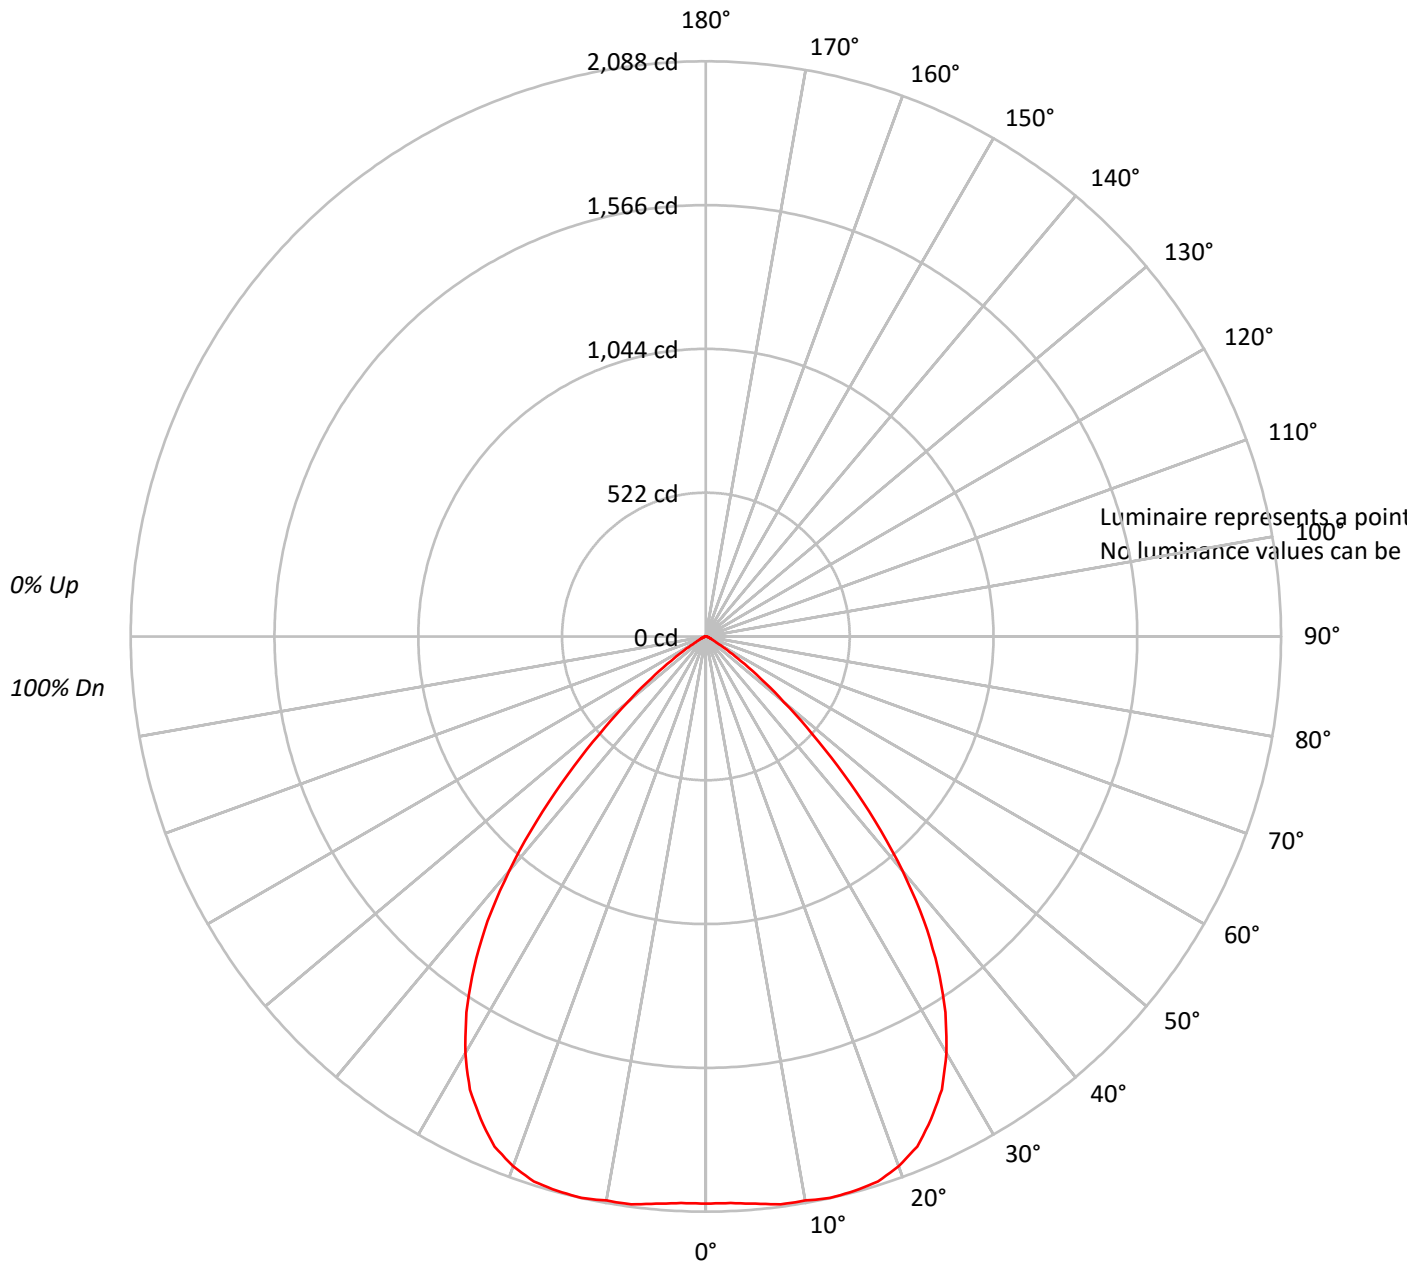



TEST NUMBER: P202858

CATALOG NUMBER: LD6B40D010 EU6B30509040 6LBWWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10			50	30	10			50
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111			106	106	106			102
1	113	109	107	104		110	107	105	102		103	101	99			99	98	96			96
2	106	100	96	92		104	98	94	91		95	92	89			92	89	87			89
3	99	92	86	81		97	90	85	81		88	83	79			85	81	78			83
4	93	84	78	73		91	83	77	72		81	76	71			79	74	71			77
5	87	77	71	66		85	76	70	65		75	69	65			73	68	64			71
6	82	71	64	59		80	71	64	59		69	63	59			67	62	58			66
7	77	66	59	54		75	65	59	54		64	58	54			63	57	53			61
8	72	61	54	49		71	61	54	49		59	53	49			58	53	49			57
9	68	57	50	45		67	56	50	45		55	49	45			54	49	45			53
10	64	53	46	42		63	53	46	42		52	46	42			51	45	42			50

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202858

CATALOG NUMBER: LD6B40D010 EU6B30509040 6LBWWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	197.9	6.0
10°-20°	588.4	17.8
20°-30°	885.7	26.7
30°-40°	905.6	27.3
40°-50°	550.0	16.6
50°-60°	154.9	4.7
60°-70°	23.5	0.7
70°-80°	7.7	0.2
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1672.0	50.4
0°-40°	2577.6	77.8
0°-60°	3282.4	99.0
0°-90°	3314.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3314.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2058	
5°	2067	198
15°	2084	588
25°	1934	886
35°	1468	906
45°	707	550
55°	154	155
65°	21	24
75°	8	8
85°	0	1
90°	0	



TEST NUMBER: P202858

CATALOG NUMBER: LD6B40D010 EU6B30509040 6LBWWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2058.5
2.5°	2058.5
5°	2066.8
7.5°	2079.3
10°	2079.3
12.5°	2087.6
15°	2083.5
17.5°	2075.1
20°	2046.0
22.5°	2004.4
25°	1933.7
27.5°	1854.7
30°	1746.6
32.5°	1617.7
35°	1468.0
37.5°	1301.6
40°	1110.3
42.5°	910.7
45°	707.0
47.5°	524.0
50°	370.1
52.5°	249.5
55°	153.9
57.5°	91.5
60°	45.7
62.5°	29.1
65°	20.8
67.5°	16.6
70°	12.5
72.5°	8.3
75°	8.3
77.5°	4.2
80°	4.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)