

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204304

Luminaire Tested: **LD6B50D010TE EU6B30508027 6LBSWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204304
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B50D010TE EU6B30508027 6LBSWH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WHEAT TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5354.1 lumens
Efficiency: N/A
Efficacy: 91.1 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204304

CATALOG NUMBER: LD6B50D010TE EU6B30508027 6LBSWH1

Luminous Intensity Polar Plot

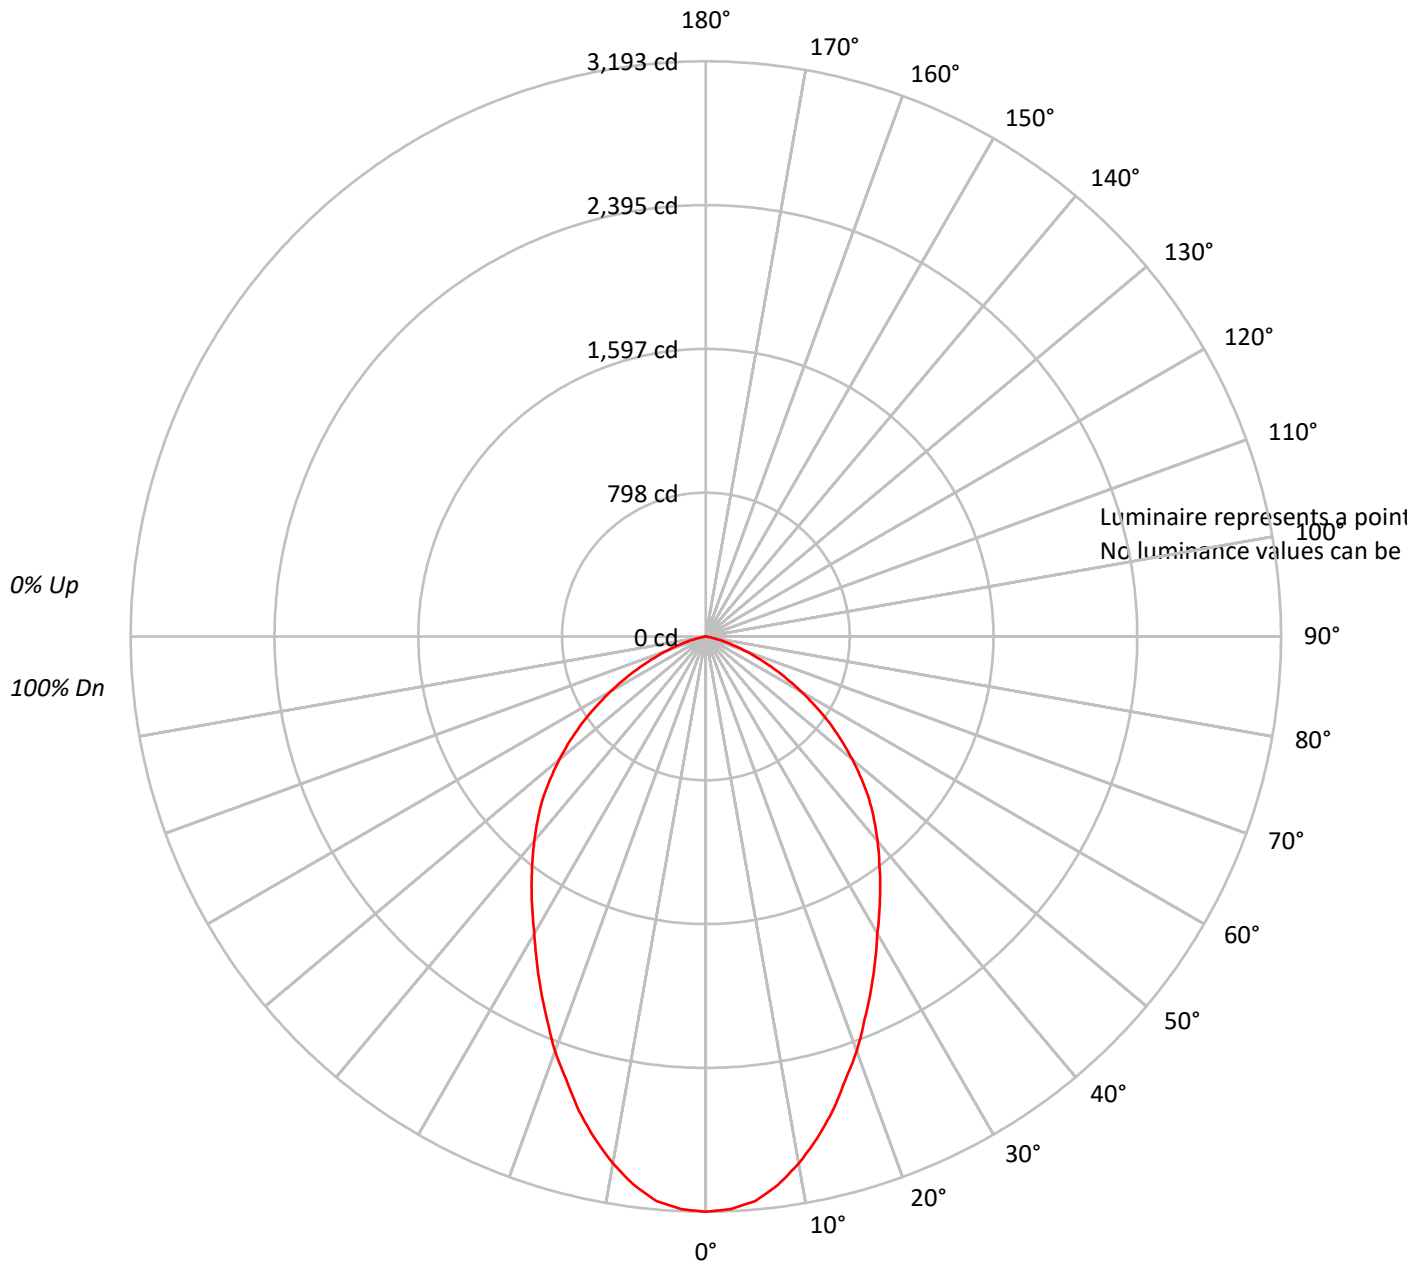



TEST NUMBER: P204304

CATALOG NUMBER: LD6B50D010TE EU6B30508027 6LBSWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	104	101		108	105	102	99		101	98	96		97	95	93		94	92	90
2	103	96	90	85		100	94	89	84		91	86	83		87	84	81		85	82	79
3	95	86	79	73		93	84	78	73		82	76	72		79	74	70		76	73	69
4	88	77	70	64		86	76	69	63		74	68	63		72	66	62		69	65	61
5	81	70	62	56		79	69	62	56		67	60	55		65	59	55		63	58	54
6	76	64	56	50		74	63	55	50		61	54	49		60	54	49		58	53	49
7	71	58	51	45		69	58	50	45		56	49	45		55	49	44		54	48	44
8	66	54	46	41		65	53	46	41		52	45	40		51	45	40		50	44	40
9	62	50	42	37		61	49	42	37		48	41	37		47	41	37		46	41	37
10	58	46	39	34		57	46	39	34		45	38	34		44	38	34		43	38	34

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204304

CATALOG NUMBER: LD6B50D010TE EU6B30508027 6LBSWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	294.5	5.5
10°-20°	762.3	14.2
20°-30°	997.1	18.6
30°-40°	1055.8	19.7
40°-50°	984.7	18.4
50°-60°	745.8	13.9
60°-70°	404.0	7.5
70°-80°	108.4	2.0
80°-90°	1.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2053.9	38.4
0°-40°	3109.7	58.1
0°-60°	4840.2	90.4
0°-90°	5354.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5354.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3193	
5°	3146	295
15°	2724	762
25°	2168	997
35°	1687	1056
45°	1283	985
55°	838	746
65°	404	404
75°	94	108
85°	0	2
90°	0	



TEST NUMBER: P204304

CATALOG NUMBER: LD6B50D010TE EU6B30508027 6LBSWH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	3193.2
2.5°	3181.5
5°	3146.3
7.5°	3070.1
10°	2970.5
12.5°	2853.4
15°	2724.5
17.5°	2578.0
20°	2449.1
22.5°	2302.6
25°	2167.8
27.5°	2033.1
30°	1904.2
32.5°	1792.9
35°	1687.4
37.5°	1581.9
40°	1482.3
42.5°	1382.7
45°	1283.1
47.5°	1171.8
50°	1060.5
52.5°	949.2
55°	837.8
57.5°	720.7
60°	609.3
62.5°	503.9
65°	404.3
67.5°	310.5
70°	228.5
72.5°	158.2
75°	93.7
77.5°	41.0
80°	11.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)