

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P203903

Luminaire Tested: **LD6B50D010TE EU6B30509727 6LBNGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203903
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B50D010TE EU6B30509727 6LBNGPH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH GRAPHITE HAZE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1920.3 lumens
Efficiency: N/A
Efficacy: 32.7 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.88
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203903

CATALOG NUMBER: LD6B50D010TE EU6B30509727 6LBNGPH1

Luminous Intensity Polar Plot

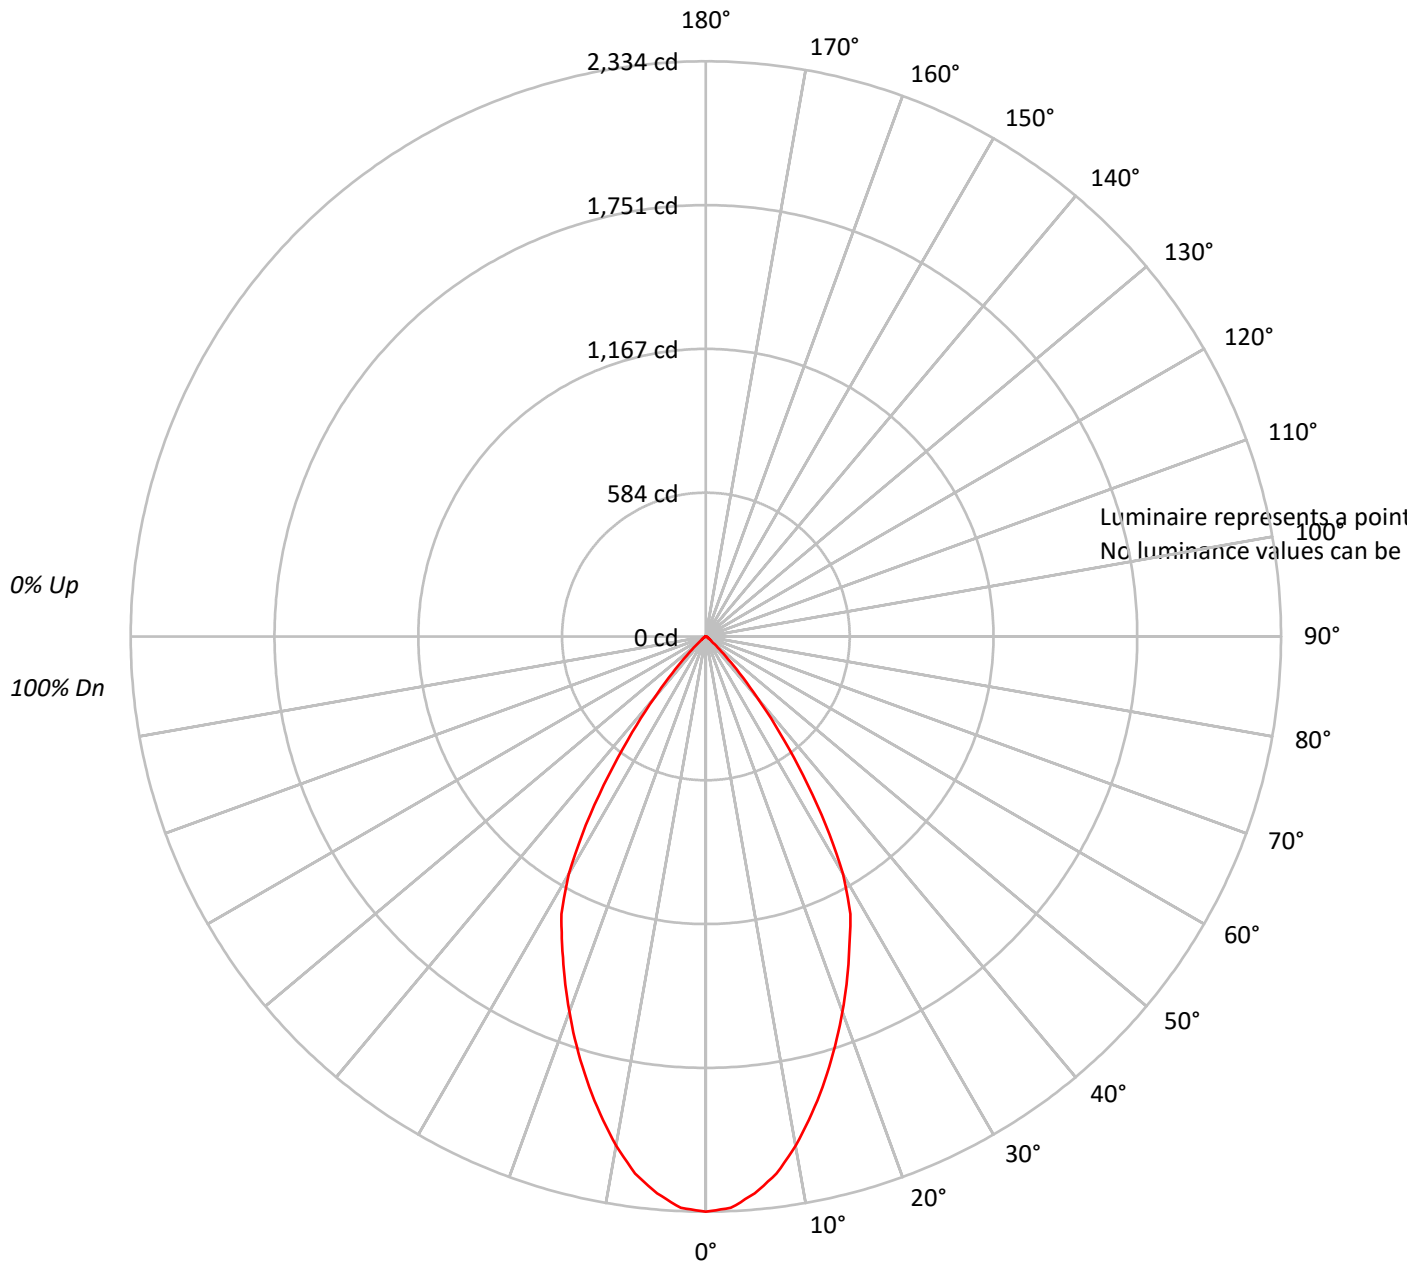




TEST NUMBER: P203903

CATALOG NUMBER: LD6B50D010TE EU6B30509727 6LBNGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	100	98		97
2	108	103	99	96	106	101	98	95	98	95	93		95	93	91		92
3	103	96	91	87	101	95	90	87	92	88	85		90	87	84		88
4	97	90	84	80	96	89	84	80	87	82	79		85	81	78		83
5	93	84	78	74	91	83	78	74	82	77	73		80	76	73		78
6	88	79	73	69	86	78	73	69	77	72	68		75	71	68		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	79	70	64	60	78	69	64	60	68	63	60		67	63	59		66
9	76	66	60	56	75	66	60	56	65	60	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

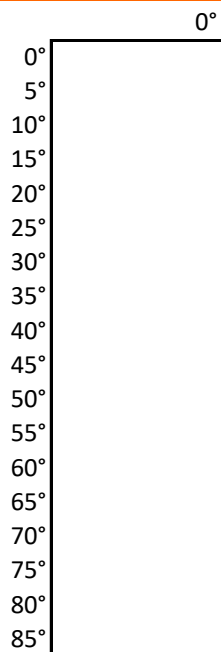



TEST NUMBER: P203903

CATALOG NUMBER: LD6B50D010TE EU6B30509727 6LBNGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	211.3	11.0
10°-20°	521.1	27.1
20°-30°	631.4	32.9
30°-40°	430.3	22.4
40°-50°	102.5	5.3
50°-60°	16.0	0.8
60°-70°	6.0	0.3
70°-80°	1.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1363.8	71.0
0°-40°	1794.1	93.4
0°-60°	1912.6	99.6
0°-90°	1920.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1920.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2334	
5°	2268	211
15°	1866	521
25°	1379	631
35°	688	430
45°	110	102
55°	18	16
65°	4	6
75°	0	2
85°	0	0
90°	0	



TEST NUMBER: P203903

CATALOG NUMBER: LD6B50D010TE EU6B30509727 6LBNGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2334.1
2.5°	2320.9
5°	2268.4
7.5°	2198.3
10°	2097.6
12.5°	1983.7
15°	1865.5
17.5°	1742.9
20°	1620.3
22.5°	1497.7
25°	1379.4
27.5°	1269.9
30°	1112.3
32.5°	906.5
35°	687.5
37.5°	490.5
40°	324.1
42.5°	201.4
45°	109.5
47.5°	56.9
50°	30.7
52.5°	21.9
55°	17.5
57.5°	13.1
60°	8.8
62.5°	8.8
65°	4.4
67.5°	4.4
70°	4.4
72.5°	4.4
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)