

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204926

Luminaire Tested: **LD6B50D010TE EU6B30508035 6LBCSMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204926
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B50D010TE EU6B30508035 6LBCSMB1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE BLACK TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5087.5 lumens
Efficiency: N/A
Efficacy: 86.6 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204926

CATALOG NUMBER: LD6B50D010TE EU6B30508035 6LBSCMB1

Luminous Intensity Polar Plot

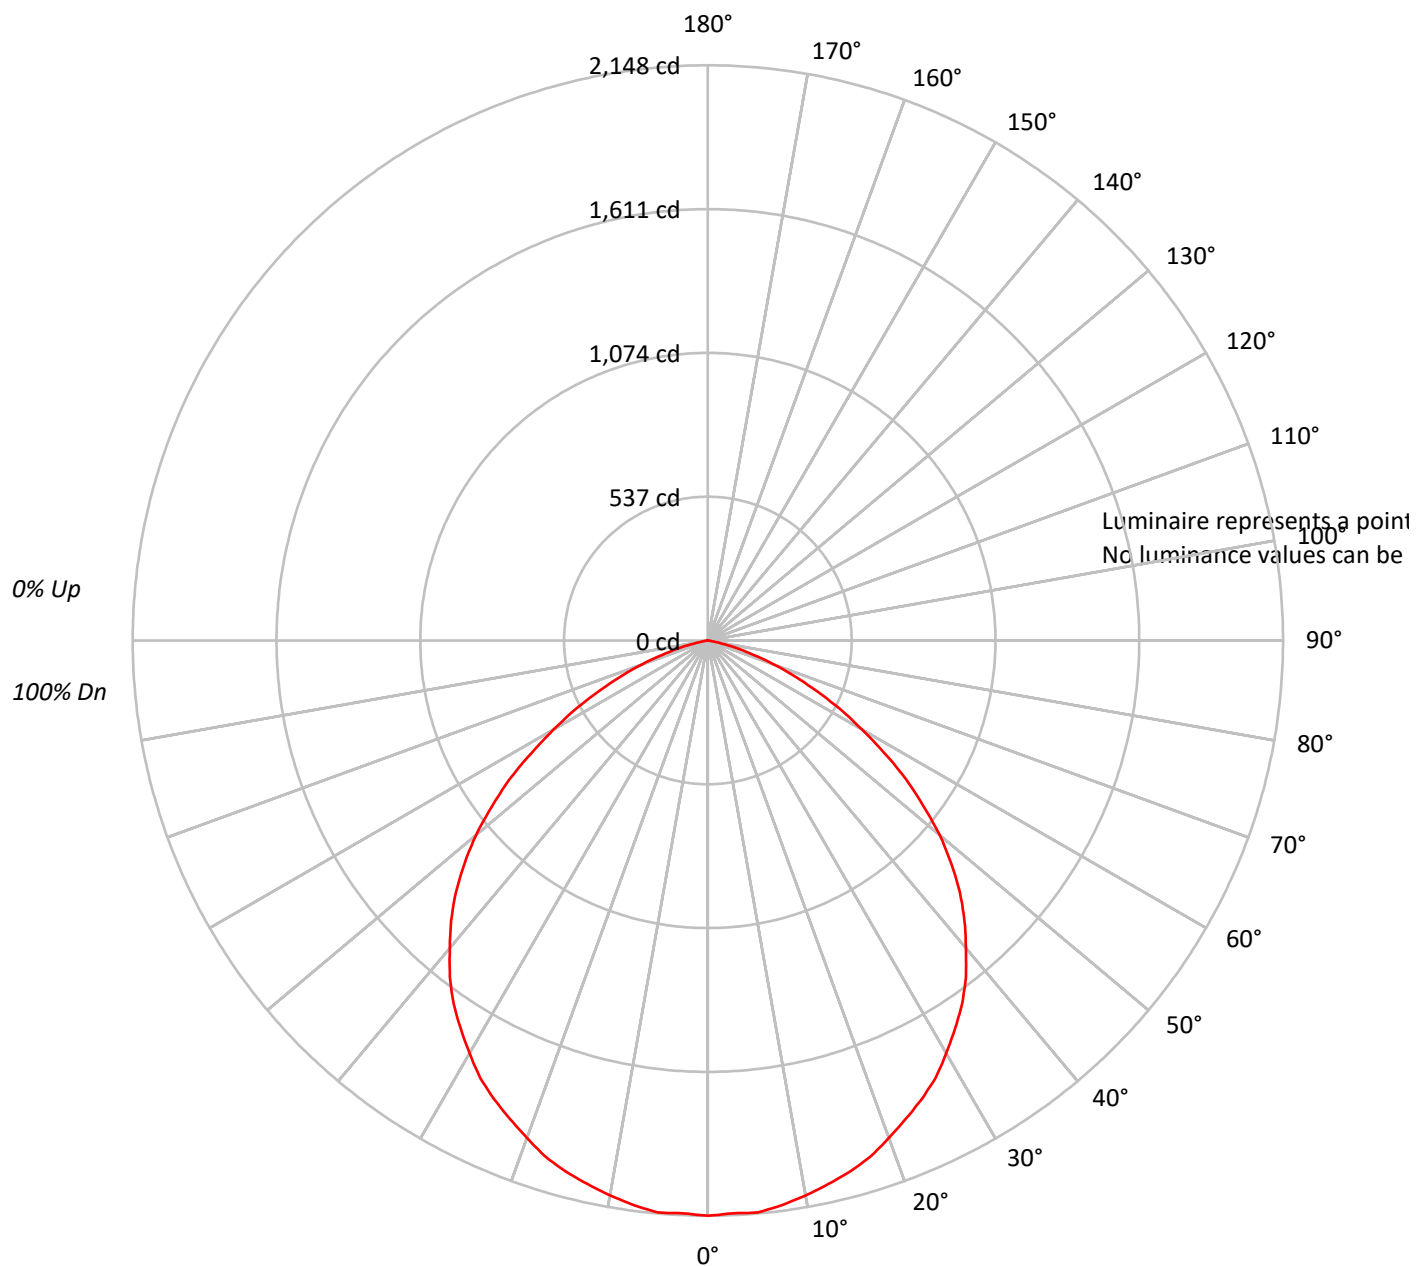




TEST NUMBER: P204926

CATALOG NUMBER: LD6B50D010TE EU6B30508035 6LBCSMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	103	100		108	104	101	98		100	98	95		96	94	92		93	91	90
2	102	95	89	84		99	93	87	83		89	85	81		86	82	79		83	80	77
3	93	84	77	71		91	83	76	70		80	74	69		77	72	68		74	70	67
4	86	75	67	61		84	74	66	61		71	65	60		69	63	59		67	62	58
5	79	67	59	53		77	66	59	53		64	57	52		62	56	52		61	55	51
6	74	61	53	47		72	60	52	46		58	51	46		57	50	46		55	50	45
7	68	55	47	41		67	55	47	41		53	46	41		52	45	41		50	45	40
8	64	51	43	37		62	50	42	37		49	42	37		48	41	37		46	41	36
9	60	47	39	33		58	46	39	33		45	38	33		44	38	33		43	37	33
10	56	43	35	30		55	43	35	30		42	35	30		41	34	30		40	34	30

AVERAGE LUMINANCE (cd/sqm):

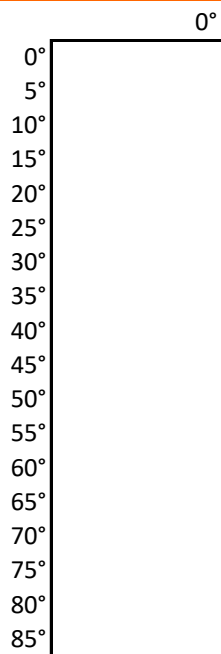



TEST NUMBER: P204926

CATALOG NUMBER: LD6B50D010TE EU6B30508035 6LBCSMB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	203.2	4.0
10°-20°	578.9	11.4
20°-30°	870.2	17.1
30°-40°	1032.5	20.3
40°-50°	1021.8	20.1
50°-60°	802.6	15.8
60°-70°	450.0	8.8
70°-80°	126.4	2.5
80°-90°	2.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1652.3	32.5
0°-40°	2684.8	52.8
0°-60°	4509.2	88.6
0°-90°	5087.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5087.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2148	
5°	2145	203
15°	2053	579
25°	1889	870
35°	1656	1033
45°	1331	1022
55°	904	803
65°	449	450
75°	109	126
85°	0	2
90°	0	



TEST NUMBER: P204926

CATALOG NUMBER: LD6B50D010TE EU6B30508035 6LBCSMB1

CANDELA DISTRIBUTION (FULL):

0°	
0°	2148.3
2.5°	2141.0
5°	2144.6
7.5°	2126.4
10°	2104.5
12.5°	2079.0
15°	2053.4
17.5°	2020.6
20°	1976.8
22.5°	1933.1
25°	1889.3
27.5°	1841.9
30°	1779.9
32.5°	1717.9
35°	1655.9
37.5°	1582.9
40°	1499.0
42.5°	1418.8
45°	1331.3
47.5°	1232.8
50°	1130.7
52.5°	1013.9
55°	904.5
57.5°	780.5
60°	663.8
62.5°	558.0
65°	448.6
67.5°	353.8
70°	262.6
72.5°	178.7
75°	109.4
77.5°	54.7
80°	14.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)