

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204830

Luminaire Tested: **LD6B50D010TE EU6B30509040 6LBCSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204830
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B50D010TE EU6B30509040 6LBCSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5094.0 lumens
Efficiency: N/A
Efficacy: 86.7 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204830

CATALOG NUMBER: LD6B50D010TE EU6B30509040 6LBSCMW1

Luminous Intensity Polar Plot

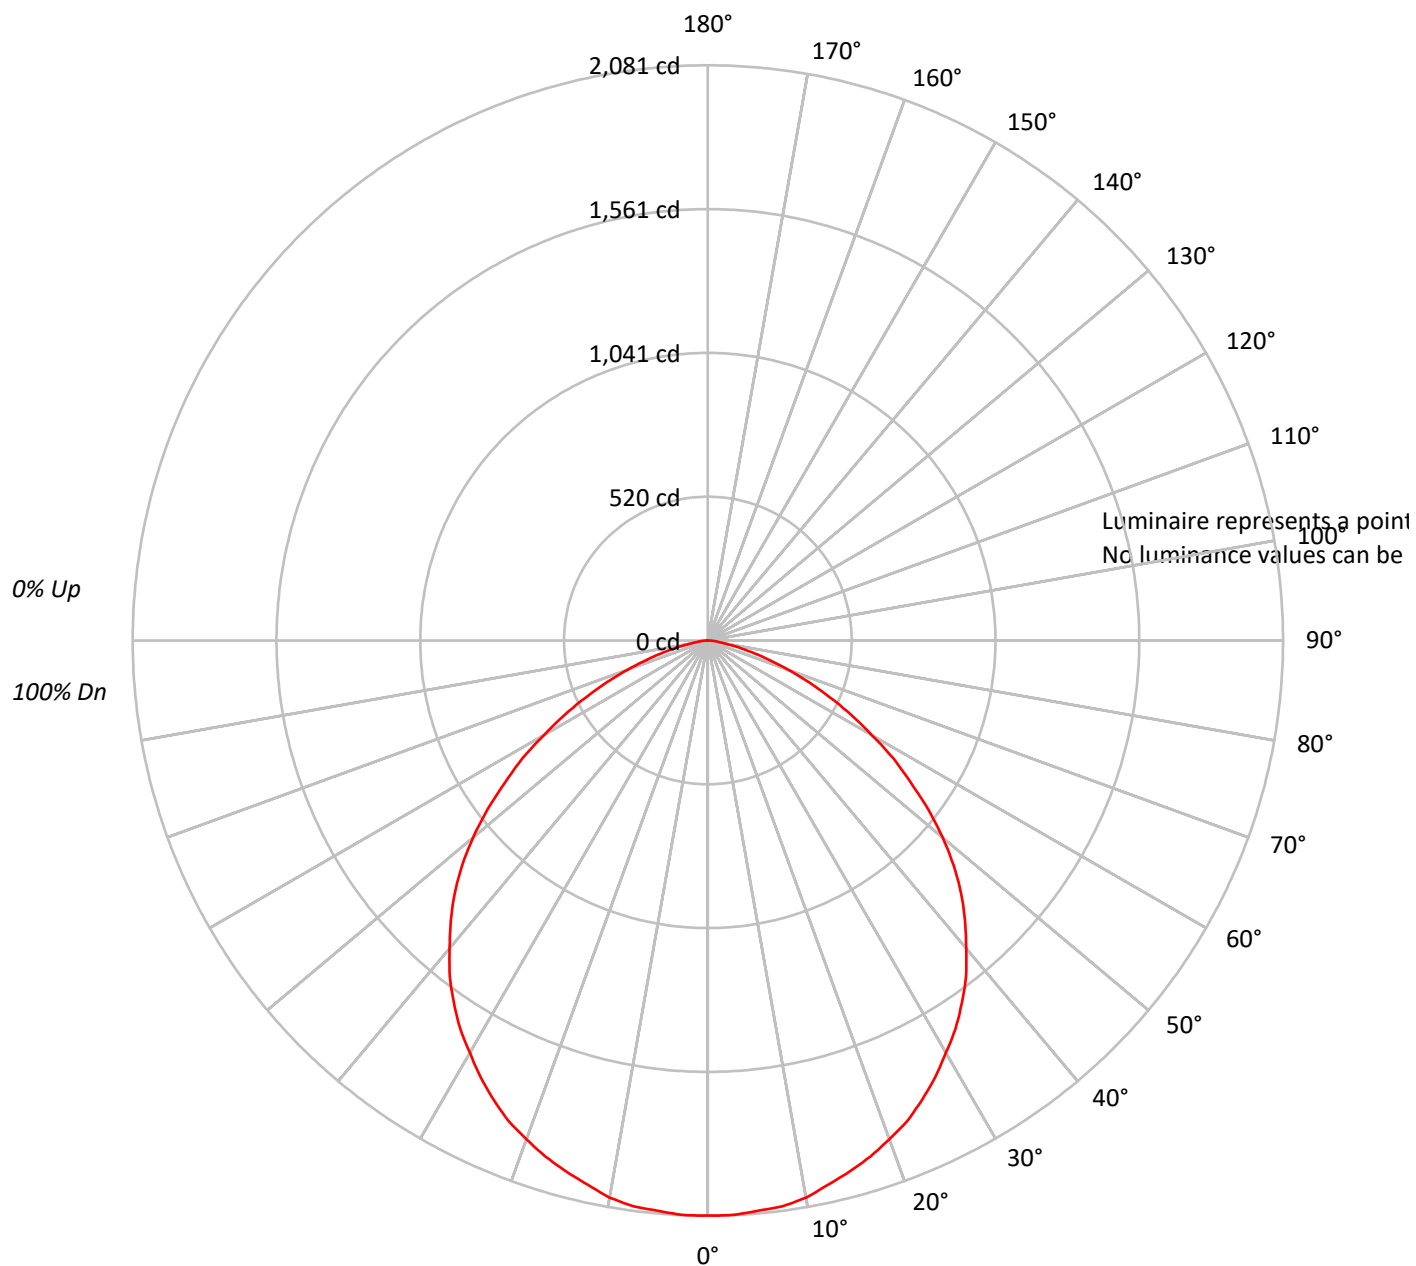



TEST NUMBER: P204830

CATALOG NUMBER: LD6B50D010TE EU6B30509040 6LBCSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87		
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74		
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63		
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55		
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48		
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42		
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37		
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33		
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30		
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204830

CATALOG NUMBER: LD6B50D010TE EU6B30509040 6LBCSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	197.1	3.9
10°-20°	561.2	11.0
20°-30°	844.2	16.6
30°-40°	1000.5	19.6
40°-50°	995.7	19.5
50°-60°	802.6	15.8
60°-70°	485.5	9.5
70°-80°	180.3	3.5
80°-90°	26.9	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1602.6	31.5
0°-40°	2603.1	51.1
0°-60°	4401.4	86.4
0°-90°	5094.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5094.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2081	
5°	2071	197
15°	1988	561
25°	1834	844
35°	1602	1000
45°	1296	996
55°	895	803
65°	488	486
75°	164	180
85°	22	27
90°	0	



TEST NUMBER: P204830

CATALOG NUMBER: LD6B50D010TE EU6B30509040 6LBCSMW1

CANDELA DISTRIBUTION (FULL):

0°	
0°	2080.6
2.5°	2080.6
5°	2071.3
7.5°	2065.2
10°	2046.6
12.5°	2015.8
15°	1988.0
17.5°	1957.1
20°	1920.1
22.5°	1883.0
25°	1833.6
27.5°	1781.2
30°	1722.5
32.5°	1666.9
35°	1602.1
37.5°	1534.2
40°	1453.9
42.5°	1376.8
45°	1296.5
47.5°	1207.0
50°	1108.2
52.5°	1006.3
55°	895.2
57.5°	796.4
60°	685.3
62.5°	586.5
65°	487.7
67.5°	395.1
70°	308.7
72.5°	231.5
75°	163.6
77.5°	105.0
80°	61.7
82.5°	37.0
85°	21.6
87.5°	9.3
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)