

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204416

Luminaire Tested: **LD6B50D010TE EU6B30509040 6LBSGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204416
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B50D010TE EU6B30509040 6LBSGPH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH GRAPHITE HAZE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4431.6 lumens
Efficiency: N/A
Efficacy: 75.4 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.26
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204416

CATALOG NUMBER: LD6B50D010TE EU6B30509040 6LBSPGH1

Luminous Intensity Polar Plot

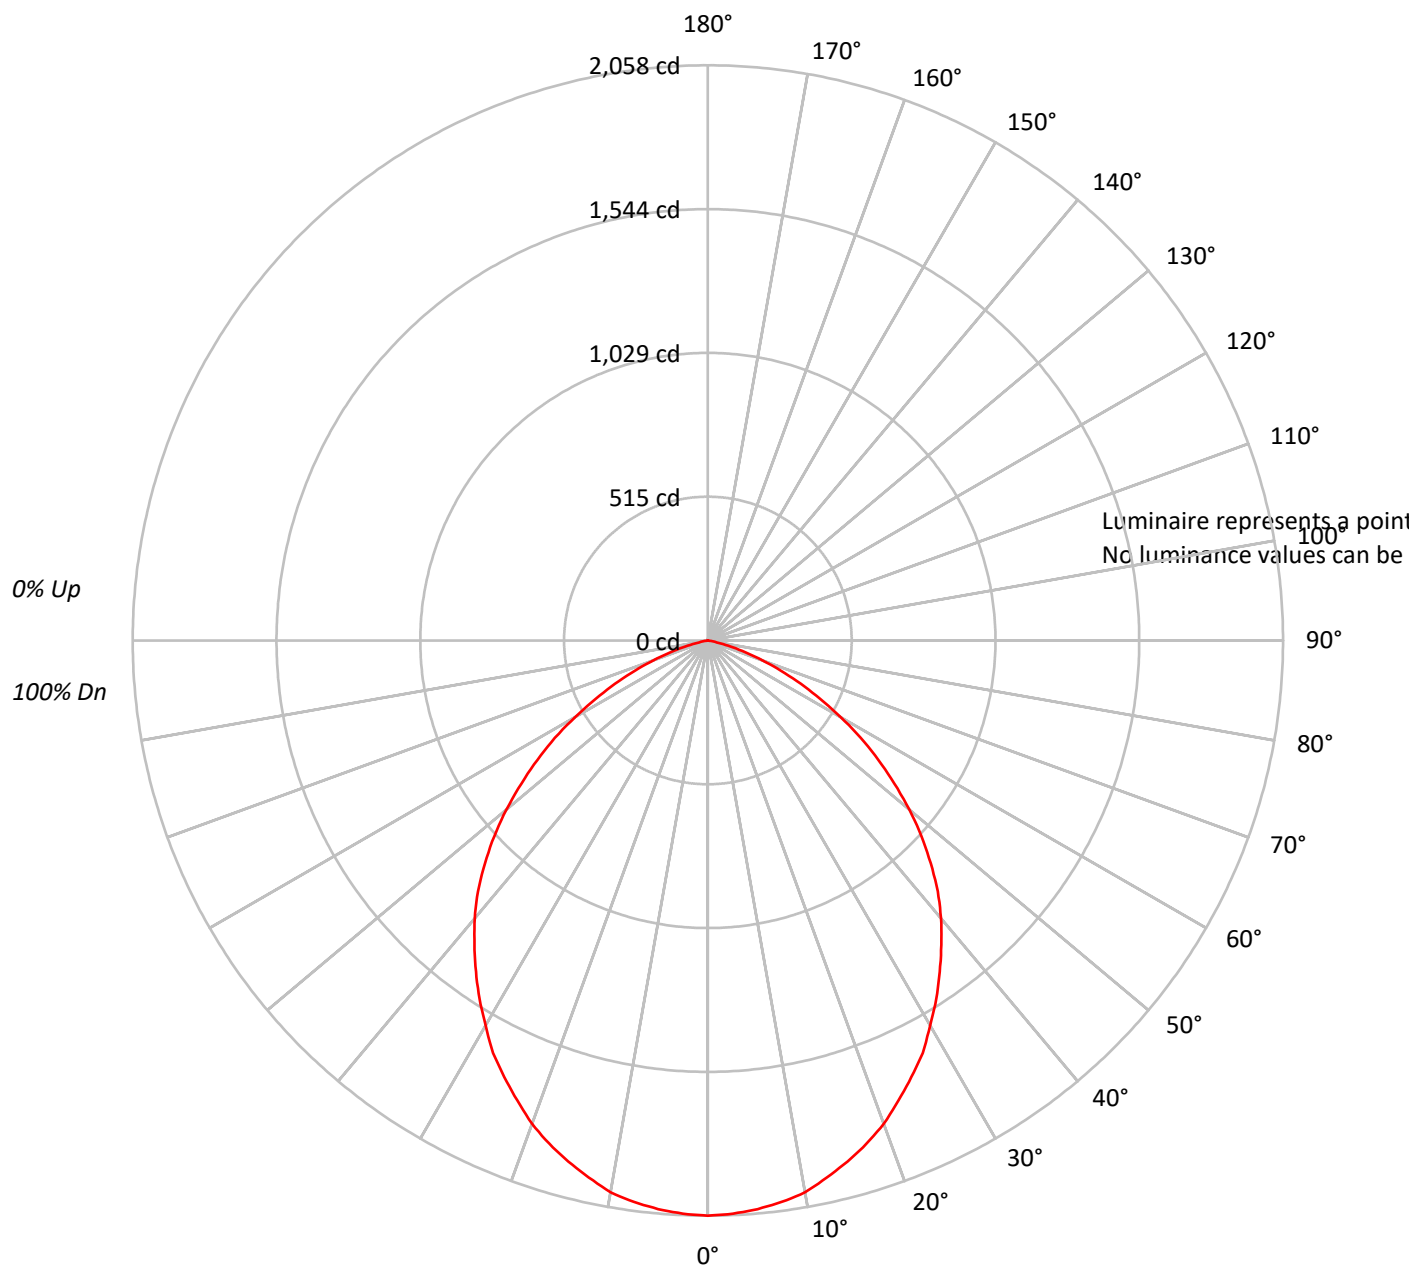



TEST NUMBER: P204416

CATALOG NUMBER: LD6B50D010TE EU6B30509040 6LBSGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	103	100		108	105	102	99		101	98	96		97	95	93		93	91	90
2	102	95	89	84		100	93	88	83		90	85	82		87	83	80		84	81	78
3	94	85	78	72		92	83	77	71		80	75	70		78	73	69		75	71	68
4	87	76	68	62		85	75	67	62		72	66	61		70	65	60		68	63	59
5	80	68	60	54		78	67	60	54		65	59	53		63	58	53		62	56	52
6	74	62	54	48		73	61	53	48		59	52	47		58	52	47		56	51	47
7	69	57	48	43		68	56	48	43		54	47	42		53	47	42		52	46	42
8	65	52	44	38		63	51	44	38		50	43	38		49	42	38		48	42	38
9	60	48	40	35		59	47	40	35		46	39	35		45	39	34		44	38	34
10	57	44	37	32		56	44	36	32		43	36	31		42	36	31		41	35	31

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204416

CATALOG NUMBER: LD6B50D010TE EU6B30509040 6LBSGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	193.8	4.4
10°-20°	544.0	12.3
20°-30°	793.4	17.9
30°-40°	904.7	20.4
40°-50°	867.9	19.6
50°-60°	664.7	15.0
60°-70°	364.8	8.2
70°-80°	97.0	2.2
80°-90°	1.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1531.1	34.6
0°-40°	2435.9	55.0
0°-60°	3968.4	89.5
0°-90°	4431.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4431.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2058	
5°	2042	194
15°	1931	544
25°	1723	793
35°	1447	905
45°	1128	868
55°	745	665
65°	367	365
75°	85	97
85°	0	1
90°	0	



TEST NUMBER: P204416

CATALOG NUMBER: LD6B50D010TE EU6B30509040 6LBSGPH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	2058.3
2.5°	2052.9
5°	2042.3
7.5°	2026.4
10°	2005.1
12.5°	1967.8
15°	1930.6
17.5°	1888.1
20°	1840.2
22.5°	1781.7
25°	1723.2
27.5°	1664.7
30°	1590.2
32.5°	1521.1
35°	1446.6
37.5°	1372.2
40°	1297.7
42.5°	1217.9
45°	1127.5
47.5°	1037.1
50°	941.4
52.5°	840.3
55°	744.6
57.5°	648.9
60°	547.8
62.5°	452.1
65°	367.0
67.5°	281.9
70°	207.4
72.5°	138.3
75°	85.1
77.5°	37.2
80°	10.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)