

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202562

Luminaire Tested: **LD6B50D010TE EU6B30509040 6LBSWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202562
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B50D010TE EU6B30509040 6LBSWMH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WARM HAZE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4874.1 lumens
Efficiency: N/A
Efficacy: 82.9 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 1.1
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202562

CATALOG NUMBER: LD6B50D010TE EU6B30509040 6LBSWMH1

Luminous Intensity Polar Plot

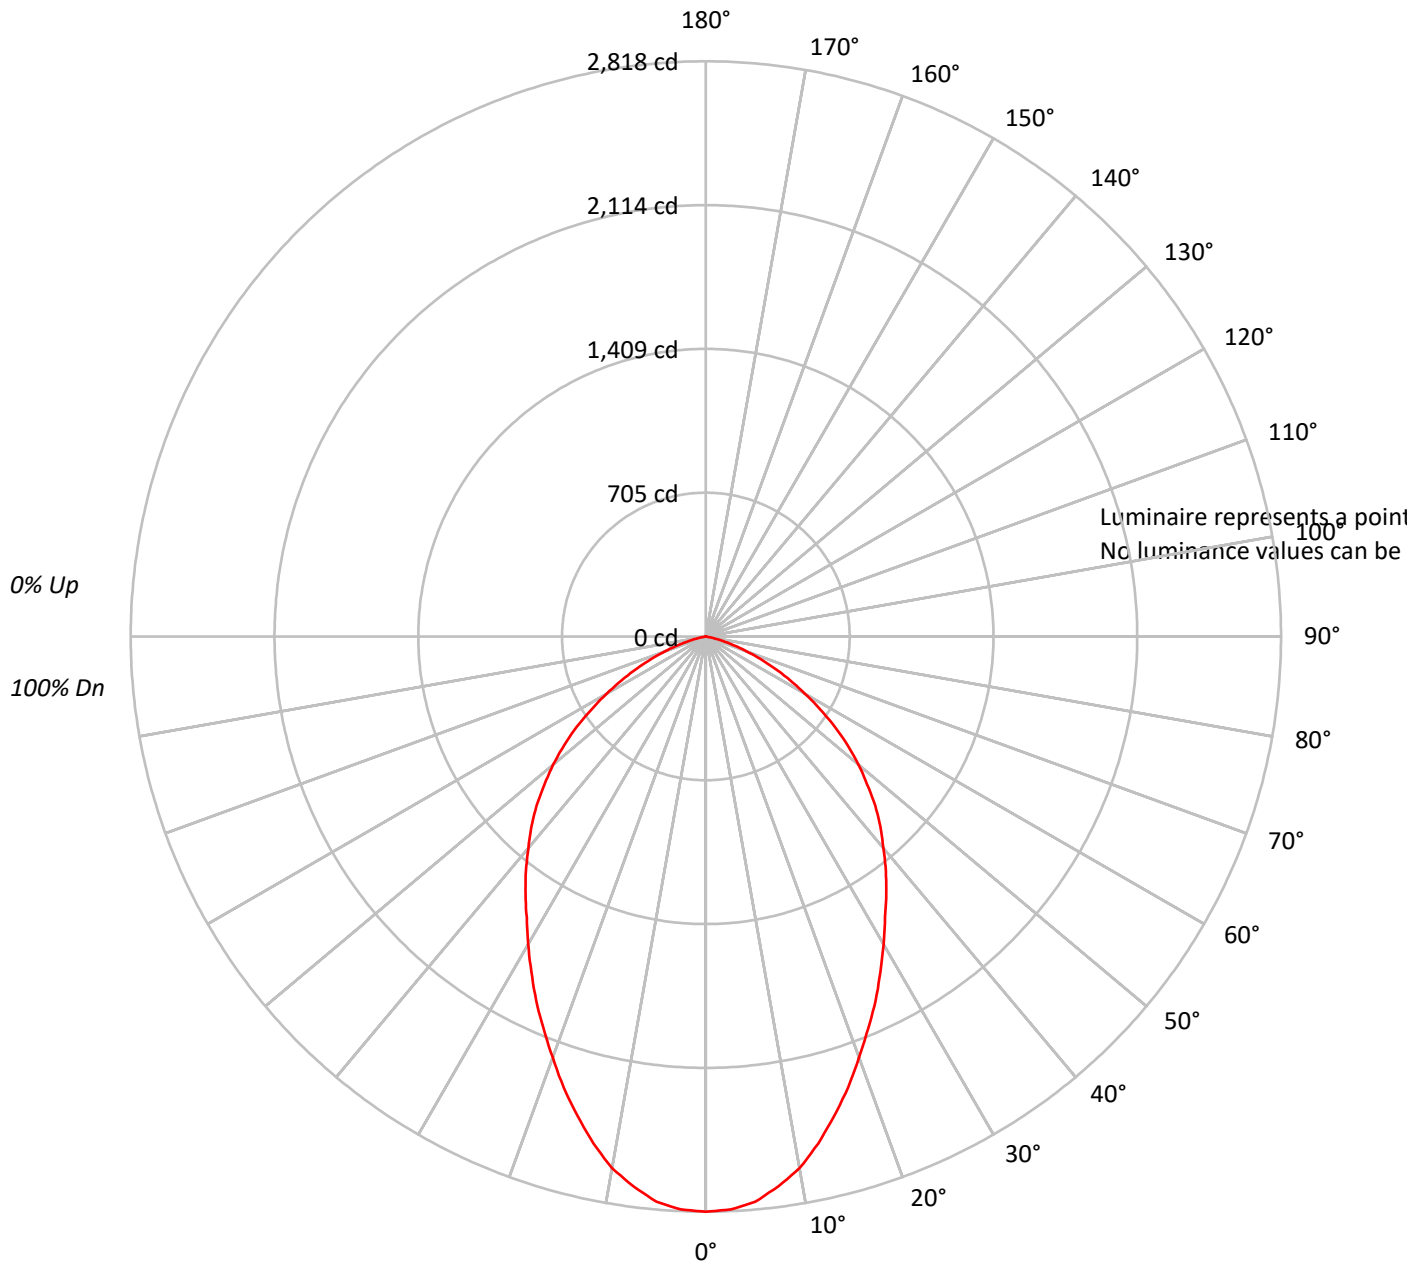




TEST NUMBER: P202562

CATALOG NUMBER: LD6B50D010TE EU6B30509040 6LBSWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	104	101	108	105	102	99		101	98	96		97	95	93		94	92	90
2	103	96	90	85	100	94	89	84		91	86	82		87	84	81		84	81	79
3	95	86	79	73	92	84	78	73		81	76	71		79	74	70		76	72	69
4	88	77	70	64	86	76	69	63		74	67	62		71	66	62		69	65	61
5	81	70	62	56	79	69	61	56		67	60	55		65	59	55		63	58	54
6	76	64	56	50	74	63	55	50		61	54	49		59	53	49		58	53	48
7	70	58	50	45	69	57	50	45		56	49	44		55	48	44		53	48	44
8	66	54	46	40	64	53	45	40		52	45	40		50	44	40		49	44	40
9	62	49	42	37	61	49	42	37		48	41	37		47	41	36		46	40	36
10	58	46	39	34	57	45	38	34		45	38	34		44	38	33		43	37	33

AVERAGE LUMINANCE (cd/sqm):

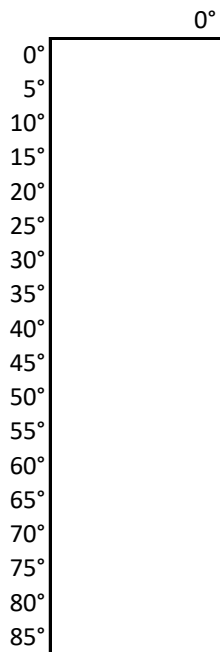



TEST NUMBER: P202562

CATALOG NUMBER: LD6B50D010TE EU6B30509040 6LBSWMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	260.8	5.4
10°-20°	681.7	14.0
20°-30°	903.9	18.5
30°-40°	964.1	19.8
40°-50°	901.2	18.5
50°-60°	687.2	14.1
60°-70°	373.8	7.7
70°-80°	100.3	2.1
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1846.3	37.9
0°-40°	2810.4	57.7
0°-60°	4398.8	90.2
0°-90°	4874.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4874.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2818	
5°	2780	261
15°	2430	682
25°	1968	904
35°	1541	964
45°	1173	901
55°	773	687
65°	373	374
75°	87	100
85°	0	1
90°	0	



TEST NUMBER: P202562

CATALOG NUMBER: LD6B50D010TE EU6B30509040 6LBSWMH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	2818.5
2.5°	2809.6
5°	2779.7
7.5°	2717.0
10°	2645.4
12.5°	2543.8
15°	2430.4
17.5°	2316.9
20°	2194.5
22.5°	2078.1
25°	1967.6
27.5°	1851.2
30°	1740.7
32.5°	1633.2
35°	1540.6
37.5°	1448.1
40°	1352.5
42.5°	1265.9
45°	1173.4
47.5°	1071.9
50°	976.3
52.5°	874.8
55°	773.3
57.5°	662.8
60°	561.3
62.5°	465.8
65°	373.2
67.5°	289.6
70°	212.0
72.5°	146.3
75°	86.6
77.5°	38.8
80°	9.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)