

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202975

Luminaire Tested: **LD6B50D010TE EU6B30509050 6LBWGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202975
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B50D010TE EU6B30509050 6LBWGPH1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTIONWITH GRAPHITE HAZE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3100.7 lumens
Efficiency: N/A
Efficacy: 52.8 lumens/watt
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.11
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202975

CATALOG NUMBER: LD6B50D010TE EU6B30509050 6LBWGPH1

Luminous Intensity Polar Plot

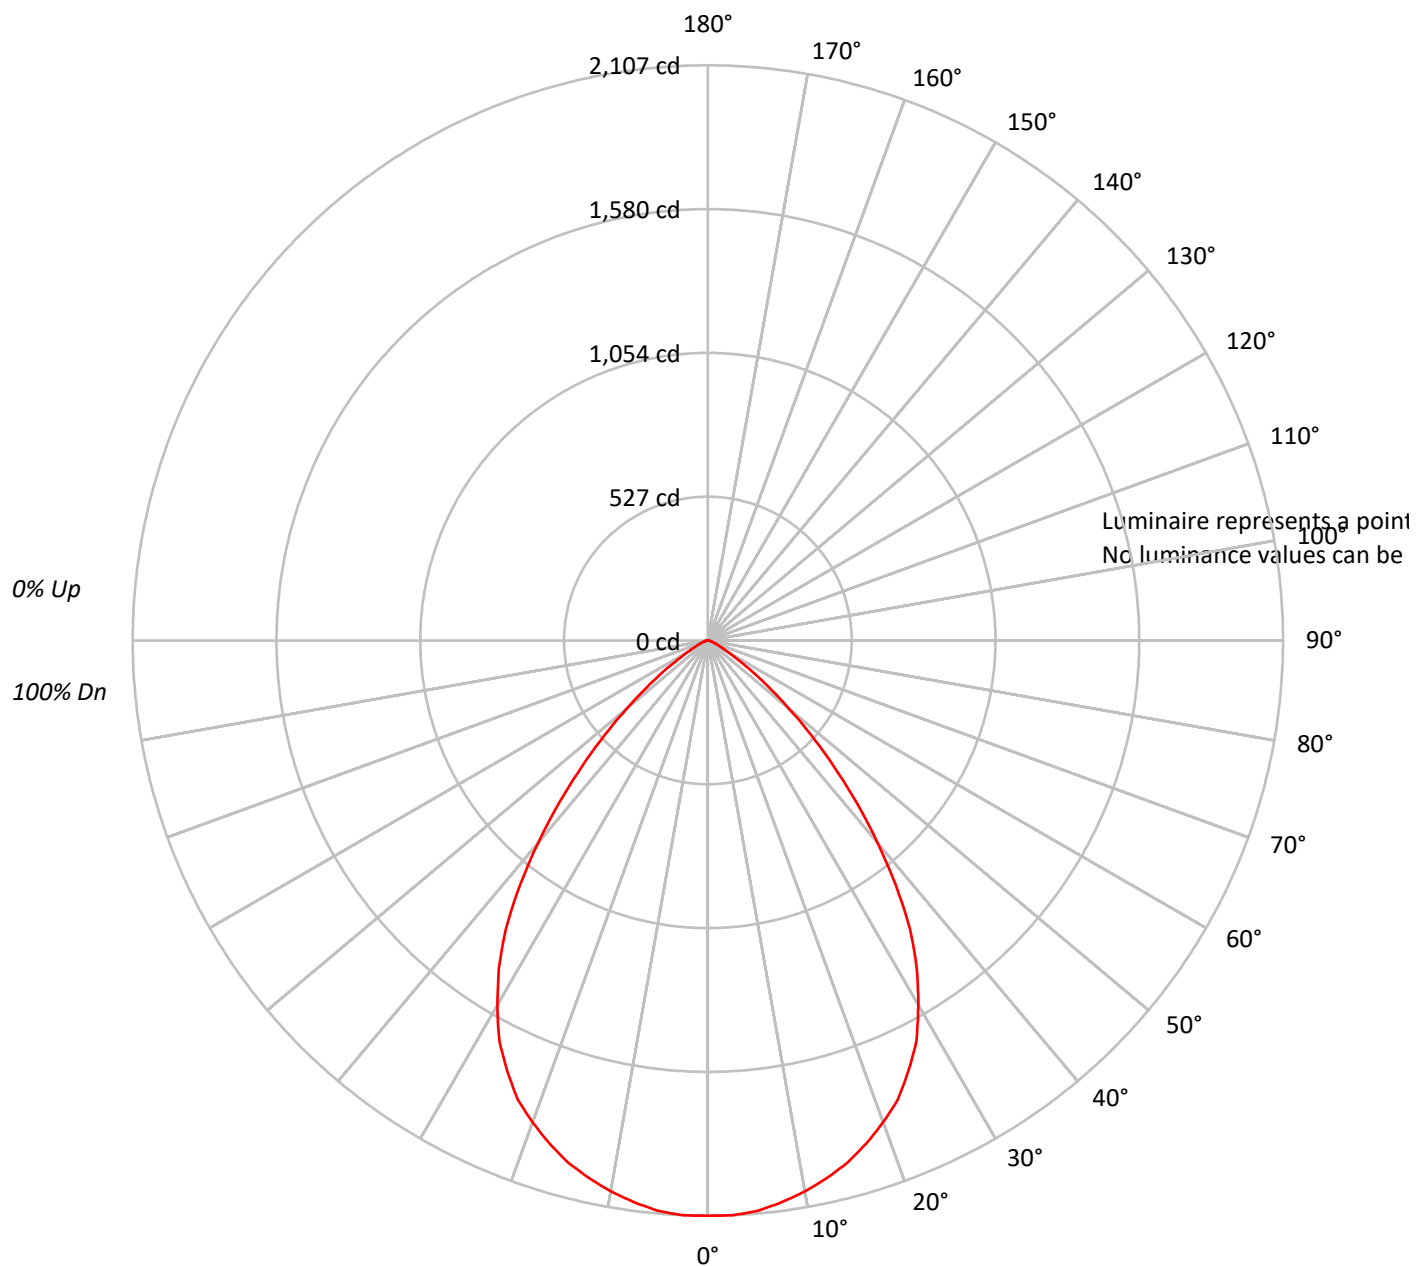




TEST NUMBER: P202975

CATALOG NUMBER: LD6B50D010TE EU6B30509050 6LBWGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	112	109	106	104		110	107	104	102		103	101	99		99	98	96		96	94	93
2	106	100	95	91		103	98	94	90		95	91	88		92	89	86		89	86	84
3	99	91	85	81		97	90	84	80		87	82	79		85	81	77		82	79	76
4	93	84	77	72		91	82	76	72		80	75	71		78	74	70		76	72	69
5	87	77	70	65		85	76	69	65		74	68	64		72	67	63		71	66	63
6	81	71	64	59		80	70	63	59		68	62	58		67	62	58		65	61	57
7	76	65	58	53		75	65	58	53		63	57	53		62	57	53		61	56	52
8	72	61	54	49		70	60	53	49		59	53	49		58	52	48		57	52	48
9	68	57	50	45		66	56	49	45		55	49	45		54	48	45		53	48	44
10	64	53	46	42		63	52	46	42		51	45	41		51	45	41		50	45	41

AVERAGE LUMINANCE (cd/sqm):

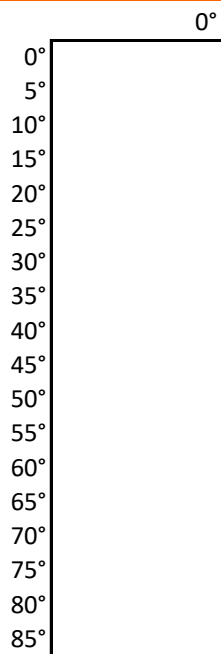



TEST NUMBER: P202975

CATALOG NUMBER: LD6B50D010TE EU6B30509050 6LBWGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	198.5	6.4
10°-20°	556.7	18.0
20°-30°	796.5	25.7
30°-40°	793.9	25.6
40°-50°	505.7	16.3
50°-60°	186.5	6.0
60°-70°	46.7	1.5
70°-80°	14.1	0.5
80°-90°	2.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1551.8	50.0
0°-40°	2345.7	75.7
0°-60°	3037.9	98.0
0°-90°	3100.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3100.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2107	
5°	2097	199
15°	1979	557
25°	1739	797
35°	1291	794
45°	651	506
55°	197	186
65°	43	47
75°	11	14
85°	0	2
90°	0	



TEST NUMBER: P202975

CATALOG NUMBER: LD6B50D010TE EU6B30509050 6LBWGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2107.4
2.5°	2107.4
5°	2096.8
7.5°	2075.4
10°	2048.8
12.5°	2016.7
15°	1979.4
17.5°	1931.4
20°	1878.0
22.5°	1819.3
25°	1739.3
27.5°	1653.9
30°	1541.9
32.5°	1424.5
35°	1291.1
37.5°	1131.1
40°	965.7
42.5°	805.6
45°	650.9
47.5°	512.2
50°	384.1
52.5°	282.8
55°	197.4
57.5°	128.0
60°	85.4
62.5°	58.7
65°	42.7
67.5°	32.0
70°	26.7
72.5°	16.0
75°	10.7
77.5°	10.7
80°	5.3
82.5°	5.3
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)