

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788952

Luminaire Tested: LER6D10D010-EC6DR300210IC9027-6LBDP1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P788952
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D10D010-EC6DR300210IC9027-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1715.6 lumens
Efficiency: N/A
Efficacy: 146.6 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P788952

CATALOG NUMBER: LER6D10D010-EC6DR300210IC9027-6LBDP1H

Luminous Intensity Polar Plot

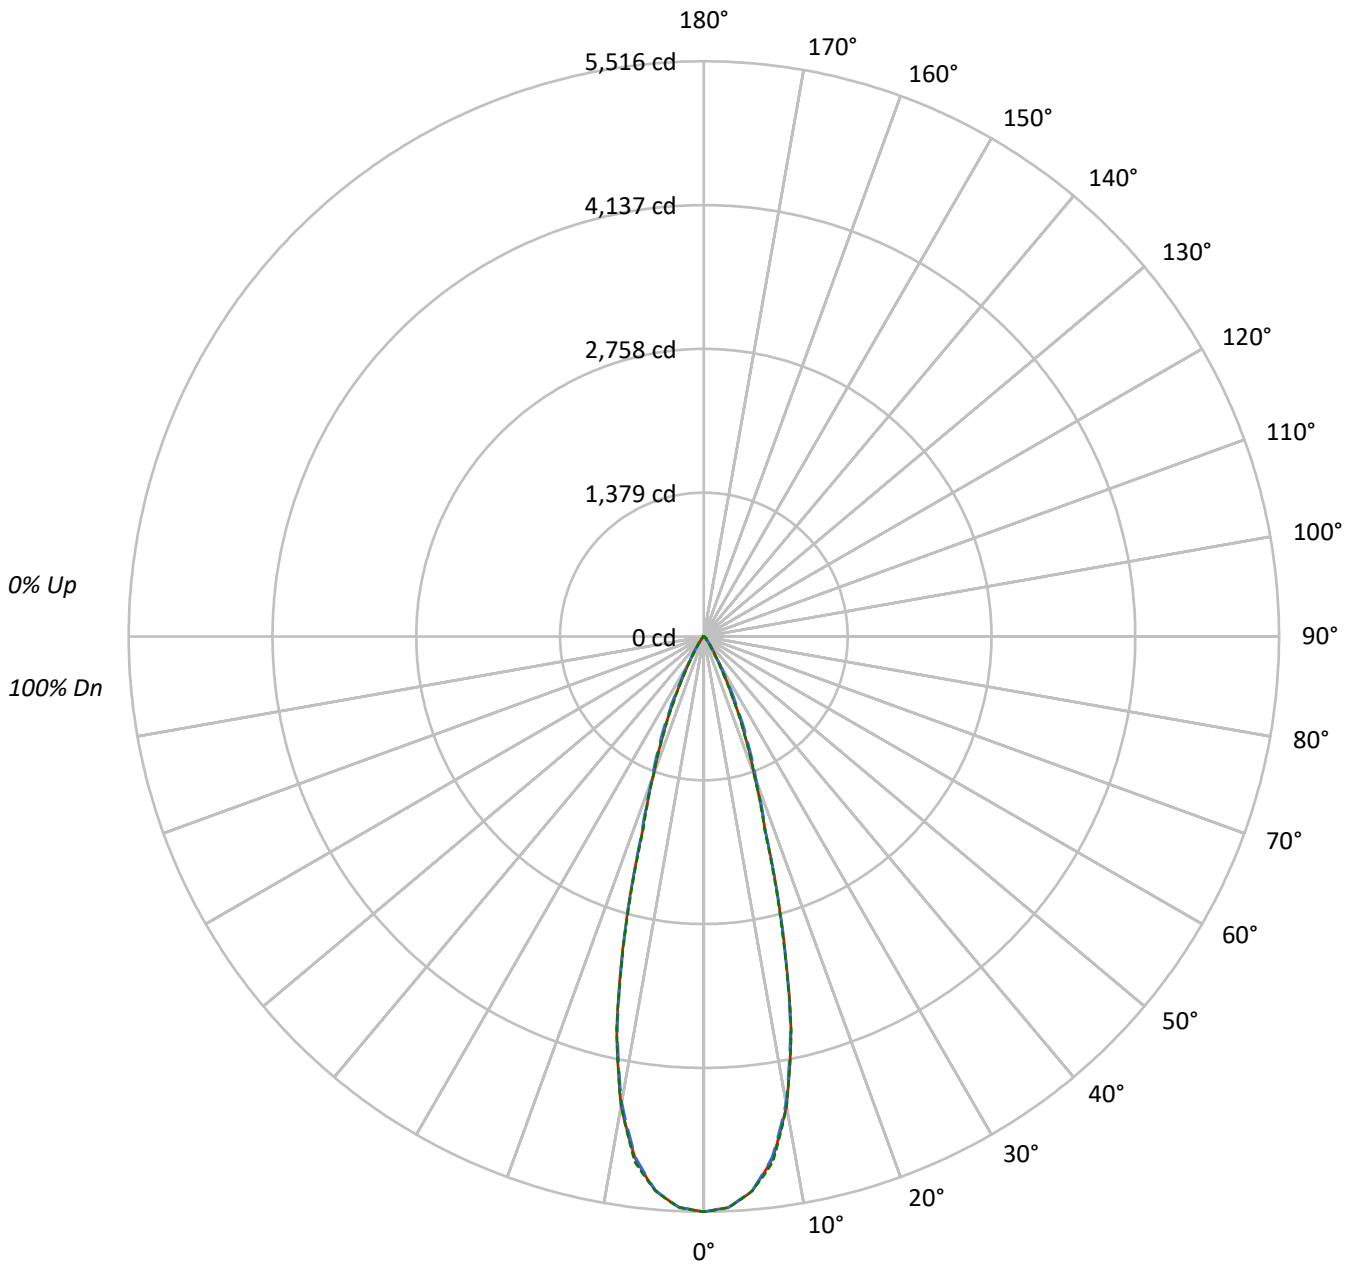



TEST NUMBER: P788952

CATALOG NUMBER: LER6D10D010-EC6DR300210IC9027-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	422244	422244	422244
5°	410126	409642	410142
10°	355231	352720	355145
15°	231772	230527	229363
20°	115252	119569	115097
25°	58055	65462	56864
30°	23245	25322	20249
35°	10783	10325	8653
40°	4656	5166	4387
45°	3280	4070	3312
50°	1131	2965	1191
55°	654	1228	681
60°	459	536	459
65°	290	290	290
70°	179	112	179
75°	0	89	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 4070 cd/sqm



TEST NUMBER: P788952

CATALOG NUMBER: LER6D10D010-EC6DR300210IC9027-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	485.1	28.3
10°-20°	781.2	45.5
20°-30°	337.6	19.7
30°-40°	76.9	4.5
40°-50°	26.4	1.5
50°-60°	6.5	0.4
60°-70°	1.7	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1603.9	93.5
0°-40°	1680.8	98.0
0°-60°	1713.7	99.9
0°-90°	1715.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1715.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5516	5516	5516	5516	5516	
5°	5338	5332	5331	5342	5338	485
15°	2925	2890	2909	2900	2894	783
25°	687	713	775	695	673	329
35°	115	118	110	110	93	78
45°	30	38	38	38	31	22
55°	5	5	9	5	5	5
65°	2	2	2	2	2	2
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P788952

CATALOG NUMBER: LER6D10D010-EC6DR300210IC9027-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5516.4	5516.4	5516.4	5516.4	5516.4
2.5°	5479.8	5476.1	5478.2	5480.9	5482.0
5°	5337.7	5332.5	5331.4	5342.5	5337.9
7.5°	5050.8	5043.5	5032.4	5057.6	5081.2
10°	4570.4	4562.3	4538.1	4550.1	4569.3
12.5°	3861.1	3834.8	3834.2	3872.2	3867.0
15°	2924.8	2889.6	2909.1	2899.6	2894.4
17.5°	1966.8	1953.3	1979.3	1971.4	1937.6
20°	1414.9	1418.4	1467.9	1443.0	1413.0
22.5°	1032.4	1045.2	1103.9	1039.7	1016.2
25°	687.4	713.4	775.1	695.2	673.3
27.5°	422.8	434.7	497.3	417.4	405.4
30°	263.0	257.0	286.5	245.9	229.1
32.5°	172.5	164.9	174.4	156.5	143.0
35°	115.4	117.8	110.5	109.7	92.6
37.5°	72.0	82.9	73.1	78.0	59.6
40°	46.6	60.1	51.7	57.1	43.9
42.5°	38.2	46.3	42.5	45.2	39.0
45°	30.3	37.6	37.6	37.6	30.6
47.5°	16.8	25.2	32.2	25.7	17.9
50°	9.5	12.7	24.9	13.3	10.0
52.5°	6.5	7.3	17.1	7.6	6.8
55°	4.9	5.1	9.2	5.4	5.1
57.5°	3.8	4.1	4.9	4.1	3.8
60°	3.0	3.0	3.5	3.3	3.0
62.5°	2.2	2.2	2.4	2.2	2.2
65°	1.6	1.6	1.6	1.6	1.6
67.5°	0.8	1.1	1.1	1.1	1.1
70°	0.8	0.5	0.5	0.5	0.8
72.5°	0.5	0.3	0.3	0.3	0.3
75°	0.0	0.0	0.3	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)