

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P175437

Luminaire Tested: **LDA6A30935D010TE LARL20NF 6LFC1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P175437  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26263)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA6A30935D010TE LARL20NF 6LFC1  
Description: PORTFOLIO 6" Flat Cone, Self-flange Trim Ring, 20° Narrow Flood  
Optic, at 0° tilt  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2209.1 lumens  
Efficiency: N/A  
Efficacy: 49.7 lumens/watt  
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 44.49  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P175437

CATALOG NUMBER: LDA6A30935D010TE LARL20NF 6LFC1

### Luminous Intensity Polar Plot

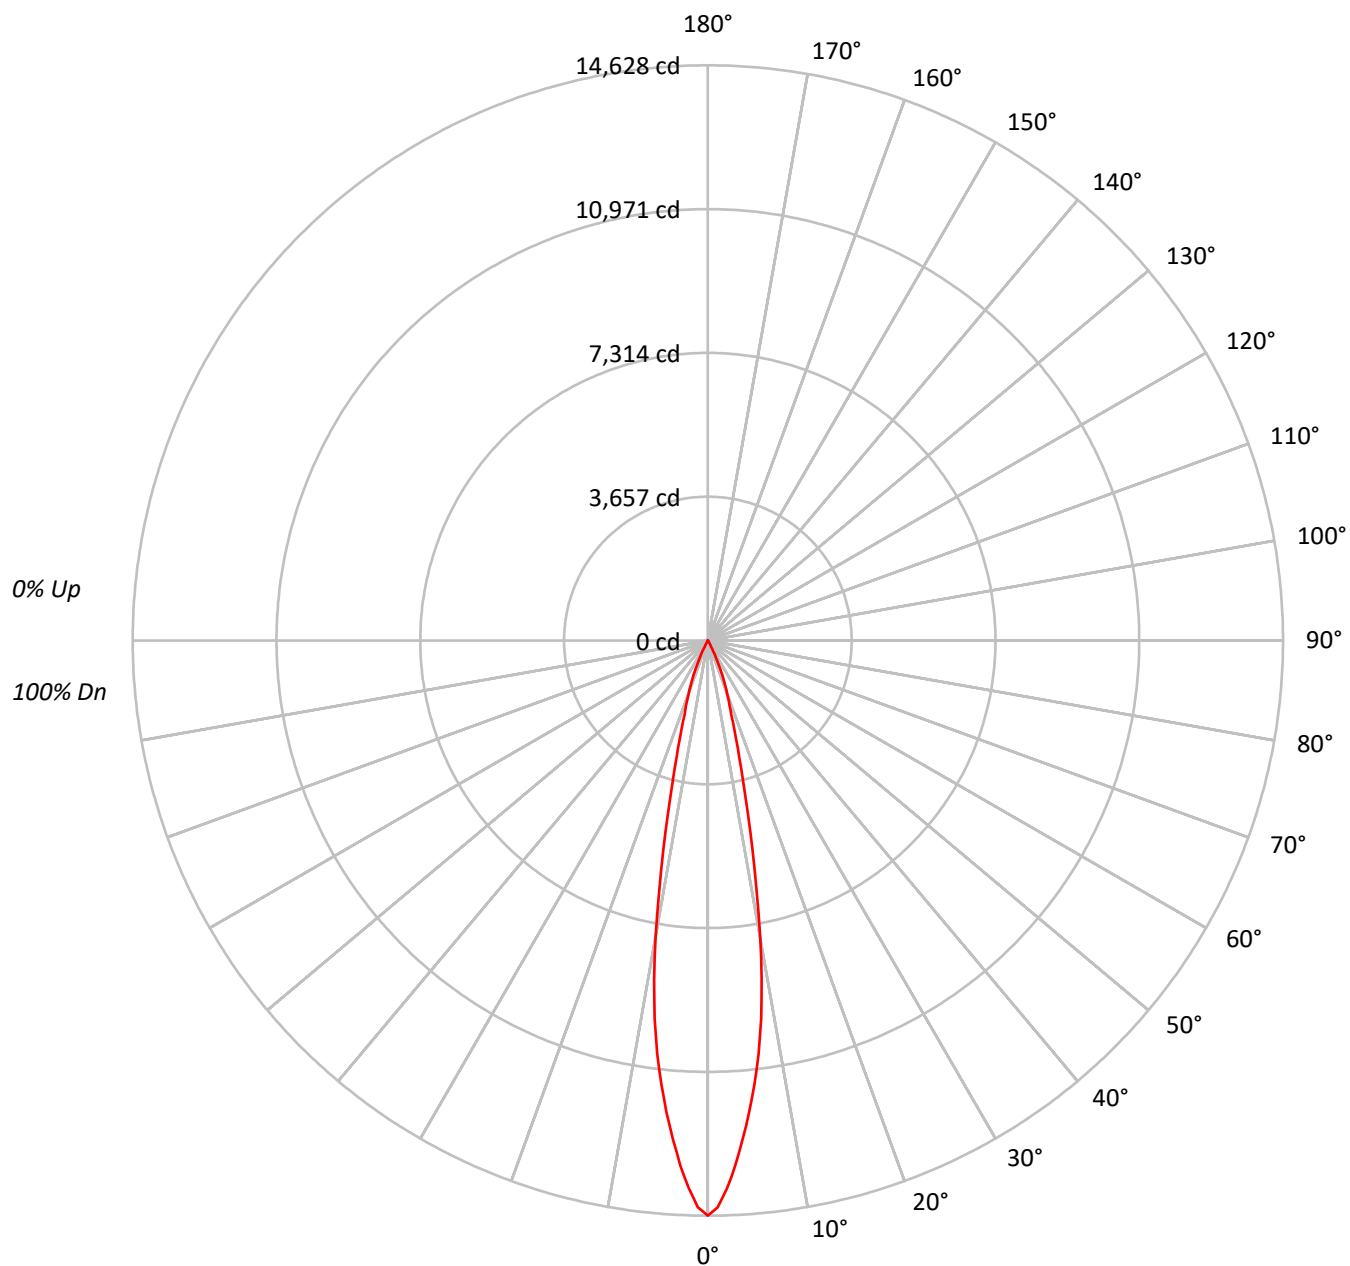



TEST NUMBER: P175437

CATALOG NUMBER: LDA6A30935D010TE LARL20NF 6LFC1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |    | 20 |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |    | 10 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |
| 1   | 115 | 114 | 112 | 110 | 113 | 111 | 110 | 108 | 107 | 106 | 105 | 104 | 103 | 102 | 100 | 100 | 99  | 97  |    |    |
| 2   | 112 | 109 | 106 | 104 | 110 | 107 | 105 | 103 | 104 | 102 | 101 | 101 | 100 | 98  | 99  | 98  | 96  | 95  |    |    |
| 3   | 109 | 105 | 102 | 99  | 107 | 104 | 101 | 98  | 101 | 99  | 97  | 99  | 97  | 95  | 97  | 95  | 94  | 93  |    |    |
| 4   | 106 | 102 | 98  | 95  | 105 | 101 | 97  | 95  | 99  | 96  | 94  | 97  | 95  | 93  | 95  | 93  | 92  | 91  |    |    |
| 5   | 104 | 99  | 95  | 92  | 102 | 98  | 94  | 92  | 96  | 93  | 91  | 95  | 92  | 90  | 93  | 91  | 90  | 89  |    |    |
| 6   | 101 | 96  | 92  | 90  | 100 | 95  | 92  | 89  | 94  | 91  | 89  | 93  | 90  | 88  | 92  | 89  | 88  | 87  |    |    |
| 7   | 99  | 93  | 90  | 87  | 98  | 93  | 89  | 87  | 92  | 89  | 87  | 91  | 88  | 86  | 90  | 87  | 86  | 85  |    |    |
| 8   | 97  | 91  | 87  | 85  | 96  | 91  | 87  | 85  | 90  | 87  | 85  | 89  | 86  | 84  | 88  | 86  | 84  | 83  |    |    |
| 9   | 95  | 89  | 85  | 83  | 94  | 89  | 85  | 83  | 88  | 85  | 83  | 87  | 84  | 82  | 86  | 84  | 82  | 81  |    |    |
| 10  | 93  | 87  | 84  | 81  | 92  | 87  | 83  | 81  | 86  | 83  | 81  | 85  | 83  | 81  | 85  | 82  | 81  | 80  |    |    |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 801920 |
| 5°  | 663024 |
| 10° | 426378 |
| 15° | 173809 |
| 20° | 82969  |
| 25° | 31091  |
| 30° | 2228   |
| 35° | 442    |
| 40° | 179    |
| 45° | 62     |
| 50° | 68     |
| 55° | 0      |
| 60° | 0      |
| 65° | 0      |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |



TEST NUMBER: P175437

CATALOG NUMBER: LDA6A30935D010TE LARL20NF 6LFC1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 1016.0 | 46.0      |
| 10°-20°   | 930.7  | 42.1      |
| 20°-30°   | 255.1  | 11.5      |
| 30°-40°   | 6.3    | 0.3       |
| 40°-50°   | 0.9    | 0.0       |
| 50°-60°   | 0.1    | 0.0       |
| 60°-70°   | 0.0    | 0.0       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 2201.9 | 99.7      |
| 0°-40°    | 2208.1 | 100.0     |
| 0°-60°    | 2209.1 | 100.0     |
| 0°-90°    | 2209.1 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 2209.1 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°    | Flux |
|-----|-------|------|
| 0°  | 14628 |      |
| 5°  | 12048 | ###  |
| 15° | 3062  | 931  |
| 25° | 514   | 255  |
| 35° | 7     | 6    |
| 45° | 1     | 1    |
| 55° | 0     | 0    |
| 65° | 0     | 0    |
| 75° | 0     | 0    |
| 85° | 0     | 0    |
| 90° | 0     |      |



TEST NUMBER: P175437

CATALOG NUMBER: LDA6A30935D010TE LARL20NF 6LFC1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°      |
|-------|---------|
| 0°    | 14628.2 |
| 1°    | 14415.0 |
| 2°    | 13942.1 |
| 3°    | 13364.1 |
| 4°    | 12715.7 |
| 5°    | 12048.5 |
| 6°    | 11345.1 |
| 7°    | 10584.4 |
| 8°    | 9715.5  |
| 9°    | 8739.2  |
| 10°   | 7659.6  |
| 11°   | 6518.5  |
| 12°   | 5455.3  |
| 13°   | 4495.4  |
| 14°   | 3716.7  |
| 15°   | 3062.5  |
| 17.5° | 1962.4  |
| 20°   | 1422.2  |
| 22.5° | 961.5   |
| 25°   | 514.0   |
| 27.5° | 172.1   |
| 30°   | 35.2    |
| 32.5° | 12.3    |
| 35°   | 6.6     |
| 37.5° | 4.1     |
| 40°   | 2.5     |
| 42.5° | 1.6     |
| 45°   | 0.8     |
| 47.5° | 0.8     |
| 50°   | 0.8     |
| 52.5° | 0.0     |
| 55°   | 0.0     |
| 57.5° | 0.0     |
| 60°   | 0.0     |
| 62.5° | 0.0     |
| 65°   | 0.0     |
| 67.5° | 0.0     |
| 70°   | 0.0     |
| 72.5° | 0.0     |
| 75°   | 0.0     |
| 77.5° | 0.0     |
| 80°   | 0.0     |
| 82.5° | 0.0     |



TEST NUMBER: P175437

CATALOG NUMBER: LDA6A30935D010TE LARL20NF 6LFC1

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







|       |     |
|-------|-----|
| 85°   | 0.0 |
| 87.5° | 0.0 |



(END OF REPORT)