

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204761

Luminaire Tested: **LE_6B10D010 EC6B10208050 6LBCSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204761
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10208050 6LBCSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1511.9 lumens
Efficiency: N/A
Efficacy: 152.7 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204761

CATALOG NUMBER: LE_6B10D010 EC6B10208050 6LBCSMW1

Luminous Intensity Polar Plot

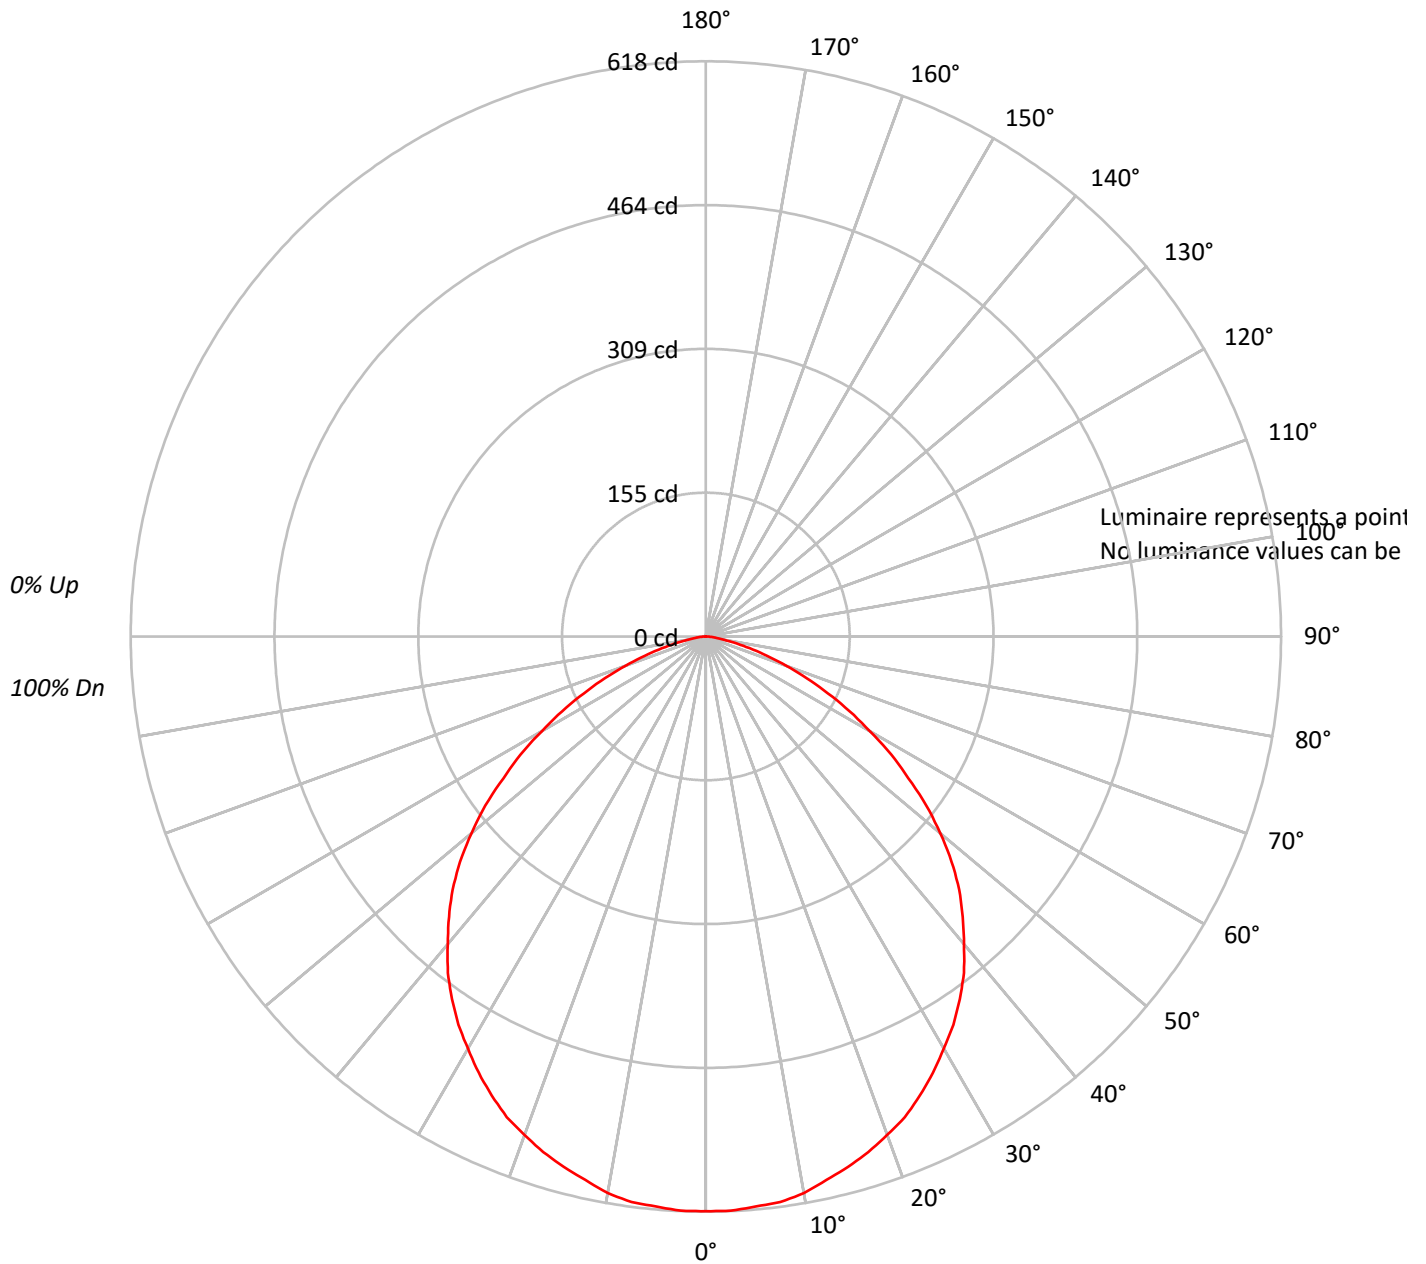




TEST NUMBER: P204761

CATALOG NUMBER: LE_6B10D010 EC6B10208050 6LBCSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	110	106	102	99		108	104	100	97		100	97	94		96	93	91		92	90	89
2	101	94	87	82		99	92	86	81		88	84	79		85	81	78		82	79	76
3	93	83	75	70		90	81	74	69		79	73	68		76	71	67		73	69	65
4	85	74	66	60		83	73	65	59		70	64	58		68	62	58		66	61	57
5	79	66	58	52		77	65	57	51		63	56	51		61	55	50		60	54	50
6	73	60	52	45		71	59	51	45		57	50	45		56	49	44		54	49	44
7	68	55	46	40		66	54	46	40		52	45	40		51	44	40		50	44	39
8	63	50	42	36		61	49	41	36		48	41	36		47	40	36		46	40	35
9	59	46	38	33		57	45	38	32		44	37	32		43	37	32		42	36	32
10	55	42	35	30		54	42	34	30		41	34	29		40	34	29		39	33	29

AVERAGE LUMINANCE (cd/sqm):

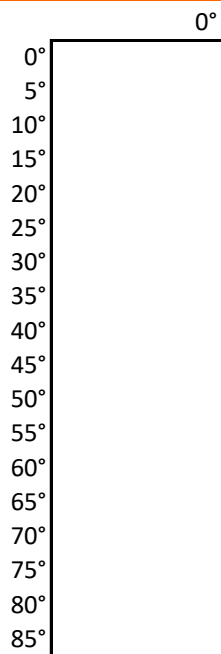



TEST NUMBER: P204761

CATALOG NUMBER: LE_6B10D010 EC6B10208050 6LBCSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.5	3.9
10°-20°	166.6	11.0
20°-30°	250.6	16.6
30°-40°	297.0	19.6
40°-50°	295.5	19.5
50°-60°	238.2	15.8
60°-70°	144.1	9.5
70°-80°	53.5	3.5
80°-90°	8.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	475.6	31.5
0°-40°	772.6	51.1
0°-60°	1306.3	86.4
0°-90°	1511.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1511.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	618	
5°	615	59
15°	590	167
25°	544	251
35°	476	297
45°	385	295
55°	266	238
65°	145	144
75°	48	54
85°	6	8
90°	0	



TEST NUMBER: P204761

CATALOG NUMBER: LE_6B10D010 EC6B10208050 6LBCSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	617.5
2.5°	617.5
5°	614.8
7.5°	612.9
10°	607.4
12.5°	598.2
15°	590.0
17.5°	580.9
20°	569.9
22.5°	558.9
25°	544.2
27.5°	528.6
30°	511.2
32.5°	494.8
35°	475.5
37.5°	455.4
40°	431.5
42.5°	408.6
45°	384.8
47.5°	358.2
50°	328.9
52.5°	298.6
55°	265.6
57.5°	236.4
60°	203.4
62.5°	174.1
65°	144.8
67.5°	117.2
70°	91.6
72.5°	68.8
75°	48.5
77.5°	31.1
80°	18.4
82.5°	11.0
85°	6.4
87.5°	2.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)