

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203832

Luminaire Tested: **LE_6B10D010 EC6B10208050 6LBNGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203832
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10208050 6LBNGPH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 692.4 lumens
Efficiency: N/A
Efficacy: 69.9 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.88
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203832

CATALOG NUMBER: LE_6B10D010 EC6B10208050 6LBNGPH1

Luminous Intensity Polar Plot

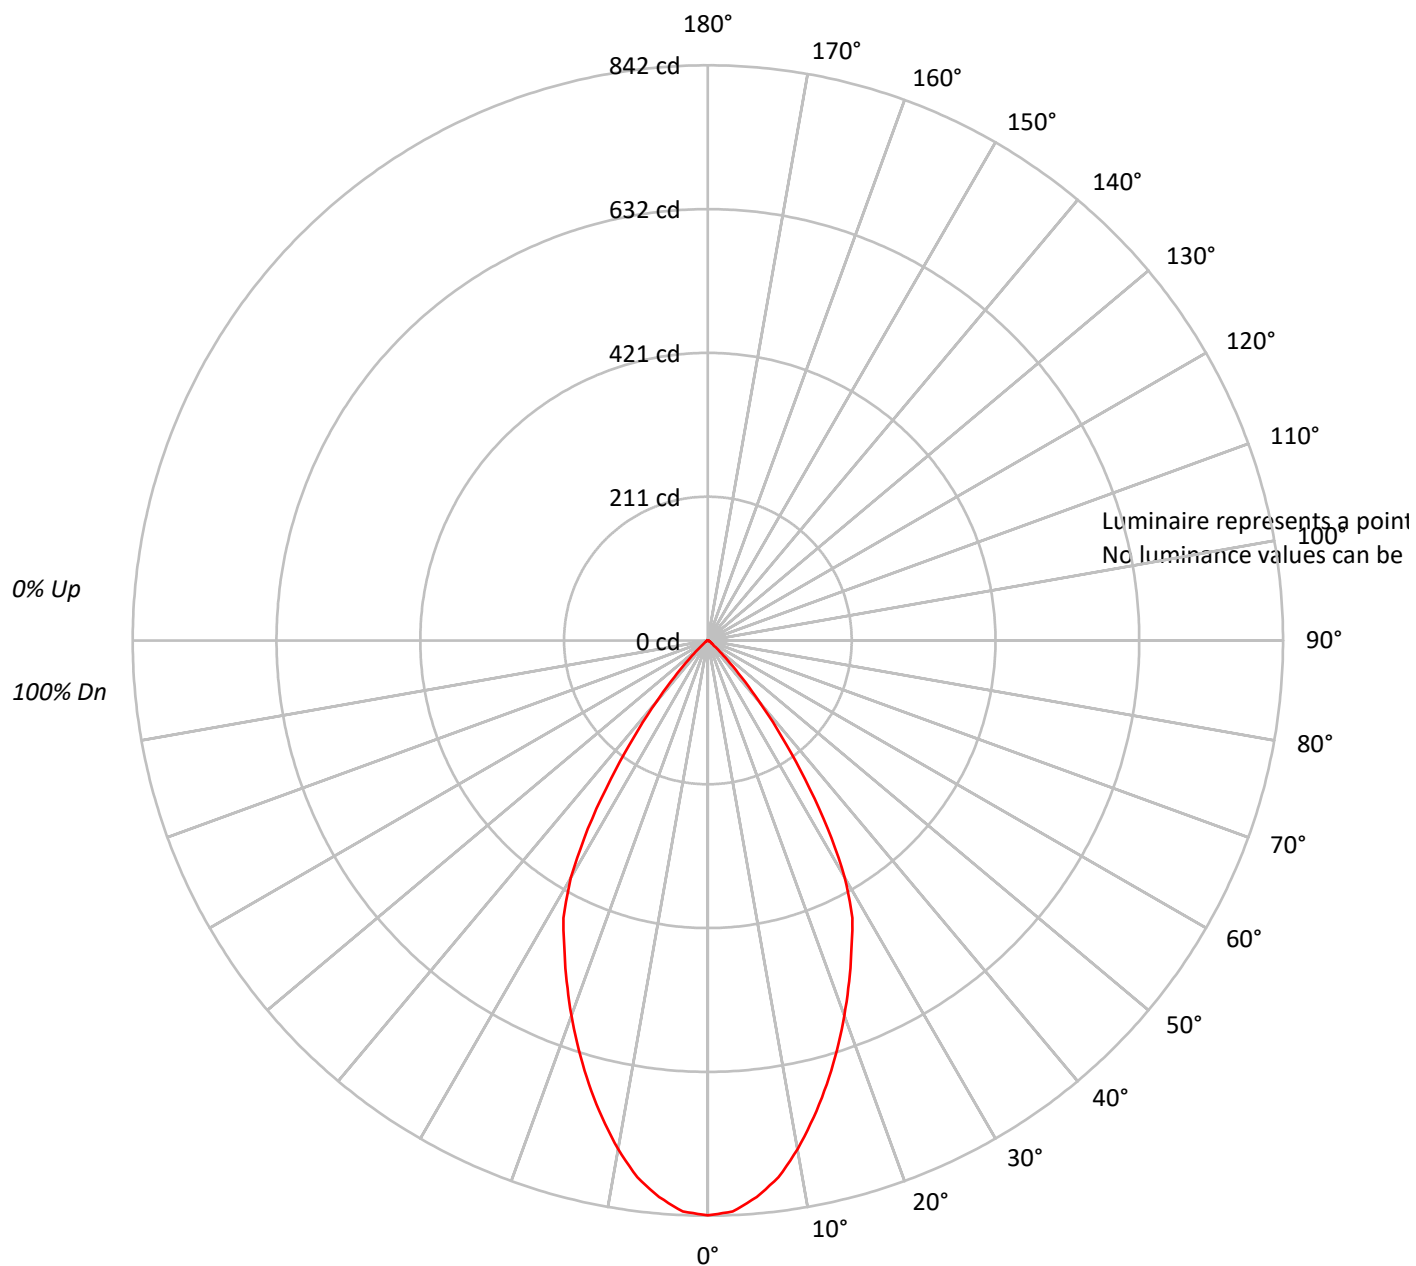



TEST NUMBER: P203832

CATALOG NUMBER: LE_6B10D010 EC6B10208050 6LBNGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	100	98		97
2	108	103	99	96	106	101	98	95	98	95	93		95	93	91		92
3	103	96	91	87	101	95	90	87	92	88	85		90	87	84		88
4	97	90	84	80	96	89	84	80	87	82	79		85	81	78		83
5	93	84	78	74	91	83	78	74	82	77	73		80	76	73		78
6	88	79	73	69	86	78	73	69	77	72	68		75	71	68		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	79	70	64	60	78	69	64	60	68	63	60		67	63	59		66
9	76	66	60	56	75	66	60	56	65	60	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203832

CATALOG NUMBER: LE_6B10D010 EC6B10208050 6LBNGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.2	11.0
10°-20°	187.9	27.1
20°-30°	227.6	32.9
30°-40°	155.2	22.4
40°-50°	36.9	5.3
50°-60°	5.8	0.8
60°-70°	2.1	0.3
70°-80°	0.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	491.7	71.0
0°-40°	646.9	93.4
0°-60°	689.6	99.6
0°-90°	692.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	692.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	842	
5°	818	76
15°	673	188
25°	497	228
35°	248	155
45°	40	37
55°	6	6
65°	2	2
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P203832

CATALOG NUMBER: LE_6B10D010 EC6B10208050 6LBNGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	841.5
2.5°	836.8
5°	817.9
7.5°	792.6
10°	756.2
12.5°	715.2
15°	672.6
17.5°	628.4
20°	584.1
22.5°	540.0
25°	497.4
27.5°	457.9
30°	401.0
32.5°	326.9
35°	247.9
37.5°	176.9
40°	116.9
42.5°	72.6
45°	39.5
47.5°	20.5
50°	11.0
52.5°	7.9
55°	6.4
57.5°	4.8
60°	3.1
62.5°	3.1
65°	1.6
67.5°	1.6
70°	1.6
72.5°	1.6
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)