

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203943

Luminaire Tested: **LE_6B15D010 EC6B10208027 6LBNB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203943
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10208027 6LBNB1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH SPECULAR BLACK TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 765.4 lumens
Efficiency: N/A
Efficacy: 53.5 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.83
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203943

CATALOG NUMBER: LE_6B15D010 EC6B10208027 6LBNB1

Luminous Intensity Polar Plot

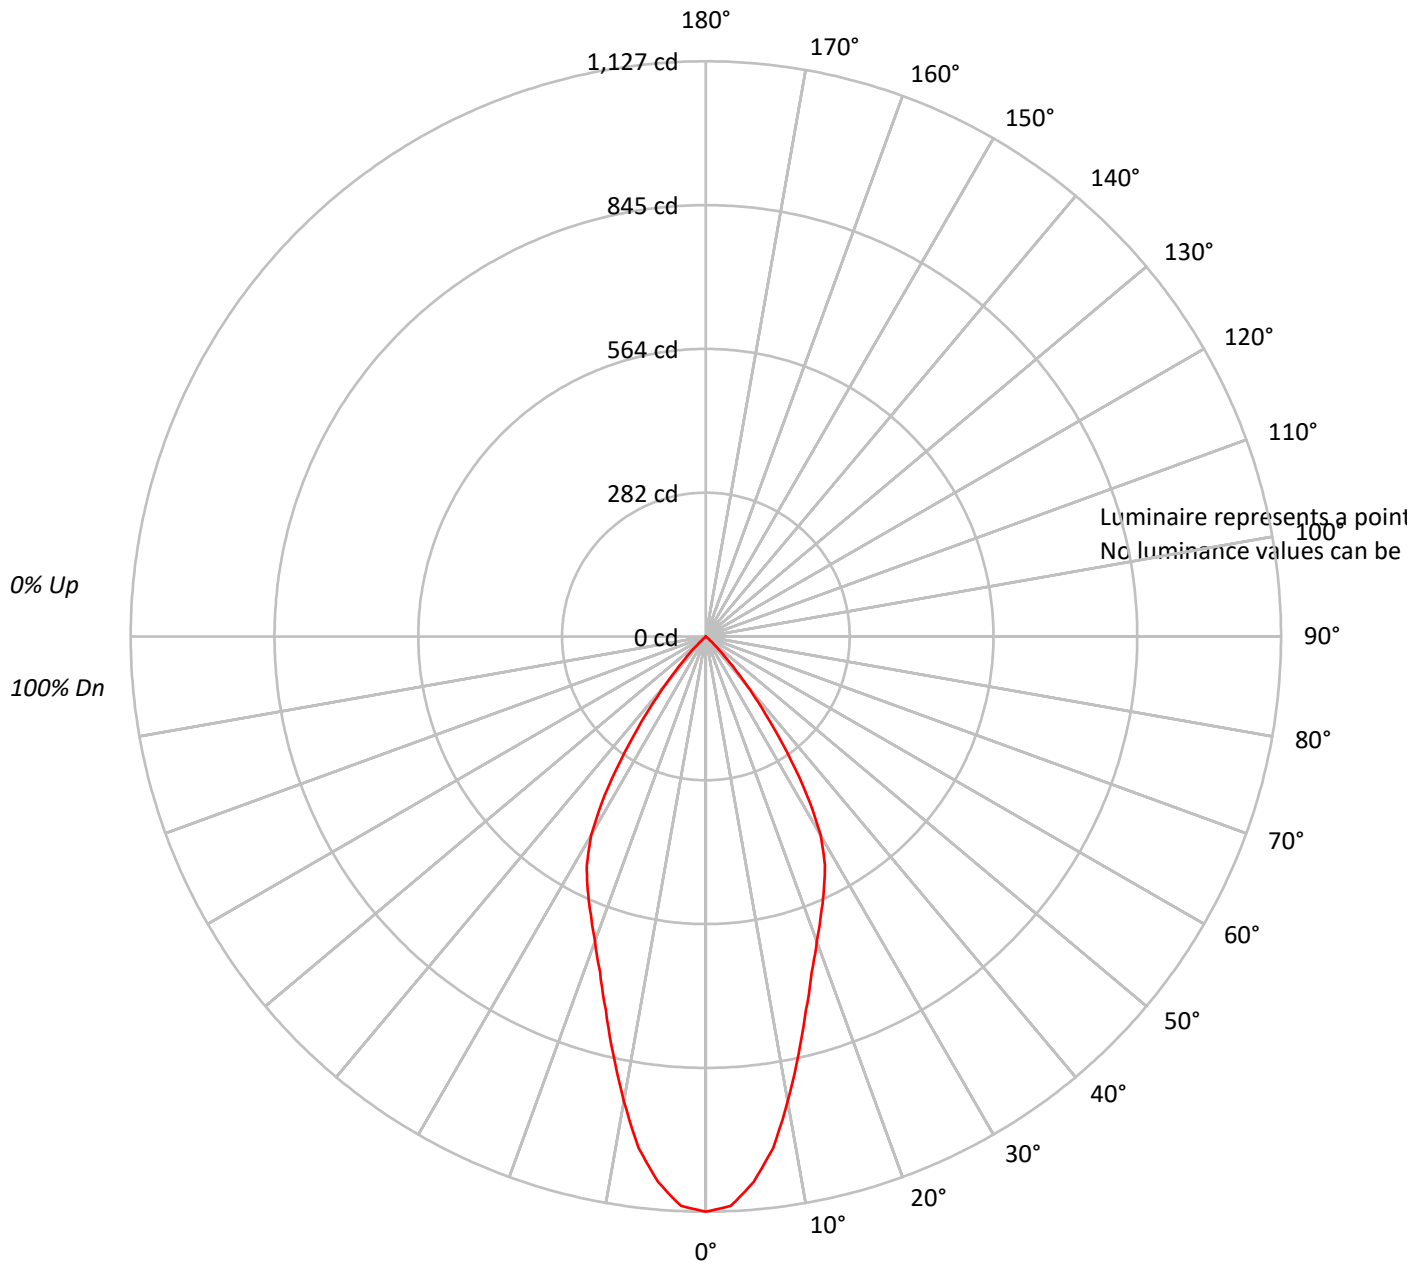



TEST NUMBER: P203943

CATALOG NUMBER: LE_6B15D010 EC6B10208027 6LBNB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			0
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	114	111	109	107	111	109	107	105		105	103	102			101	100	99			98
2	108	104	100	97	106	102	99	96		99	96	93			96	94	91			93
3	103	97	92	88	101	96	91	88		93	89	86			91	88	85			88
4	98	91	86	82	96	90	85	81		88	84	80			86	82	79			84
5	93	85	80	76	92	85	79	75		83	78	75			81	77	74			80
6	89	80	75	71	88	80	74	70		78	73	70			77	73	69			75
7	85	76	70	66	83	75	70	66		74	69	65			73	68	65			72
8	81	72	66	62	80	71	66	62		70	65	61			69	64	61			68
9	77	68	62	58	76	67	62	58		66	61	58			65	61	58			65
10	74	64	59	55	73	64	58	55		63	58	55			62	58	55			62

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203943

CATALOG NUMBER: LE_6B15D010 EC6B10208027 6LBNB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.8	12.8
10°-20°	213.0	27.8
20°-30°	250.3	32.7
30°-40°	172.4	22.5
40°-50°	31.9	4.2
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	561.2	73.3
0°-40°	733.5	95.8
0°-60°	765.4	100.0
0°-90°	765.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	765.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1127	
5°	1073	98
15°	758	213
25°	547	250
35°	277	172
45°	32	32
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P203943

CATALOG NUMBER: LE_6B15D010 EC6B10208027 6LBNB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1126.9
2.5°	1116.9
5°	1072.8
7.5°	1010.5
10°	924.4
12.5°	838.1
15°	757.9
17.5°	689.8
20°	635.6
22.5°	589.5
25°	547.4
27.5°	505.2
30°	449.1
32.5°	368.9
35°	276.8
37.5°	192.5
40°	122.2
42.5°	68.1
45°	32.1
47.5°	10.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)