

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P205489

Luminaire Tested: **LE_6B15D010 EC6B10209027 6LBMGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205489
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10209027 6LBMGPH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 840.2 lumens
Efficiency: N/A
Efficacy: 58.8 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205489

CATALOG NUMBER: LE_6B15D010 EC6B10209027 6LBMGPH1

Luminous Intensity Polar Plot

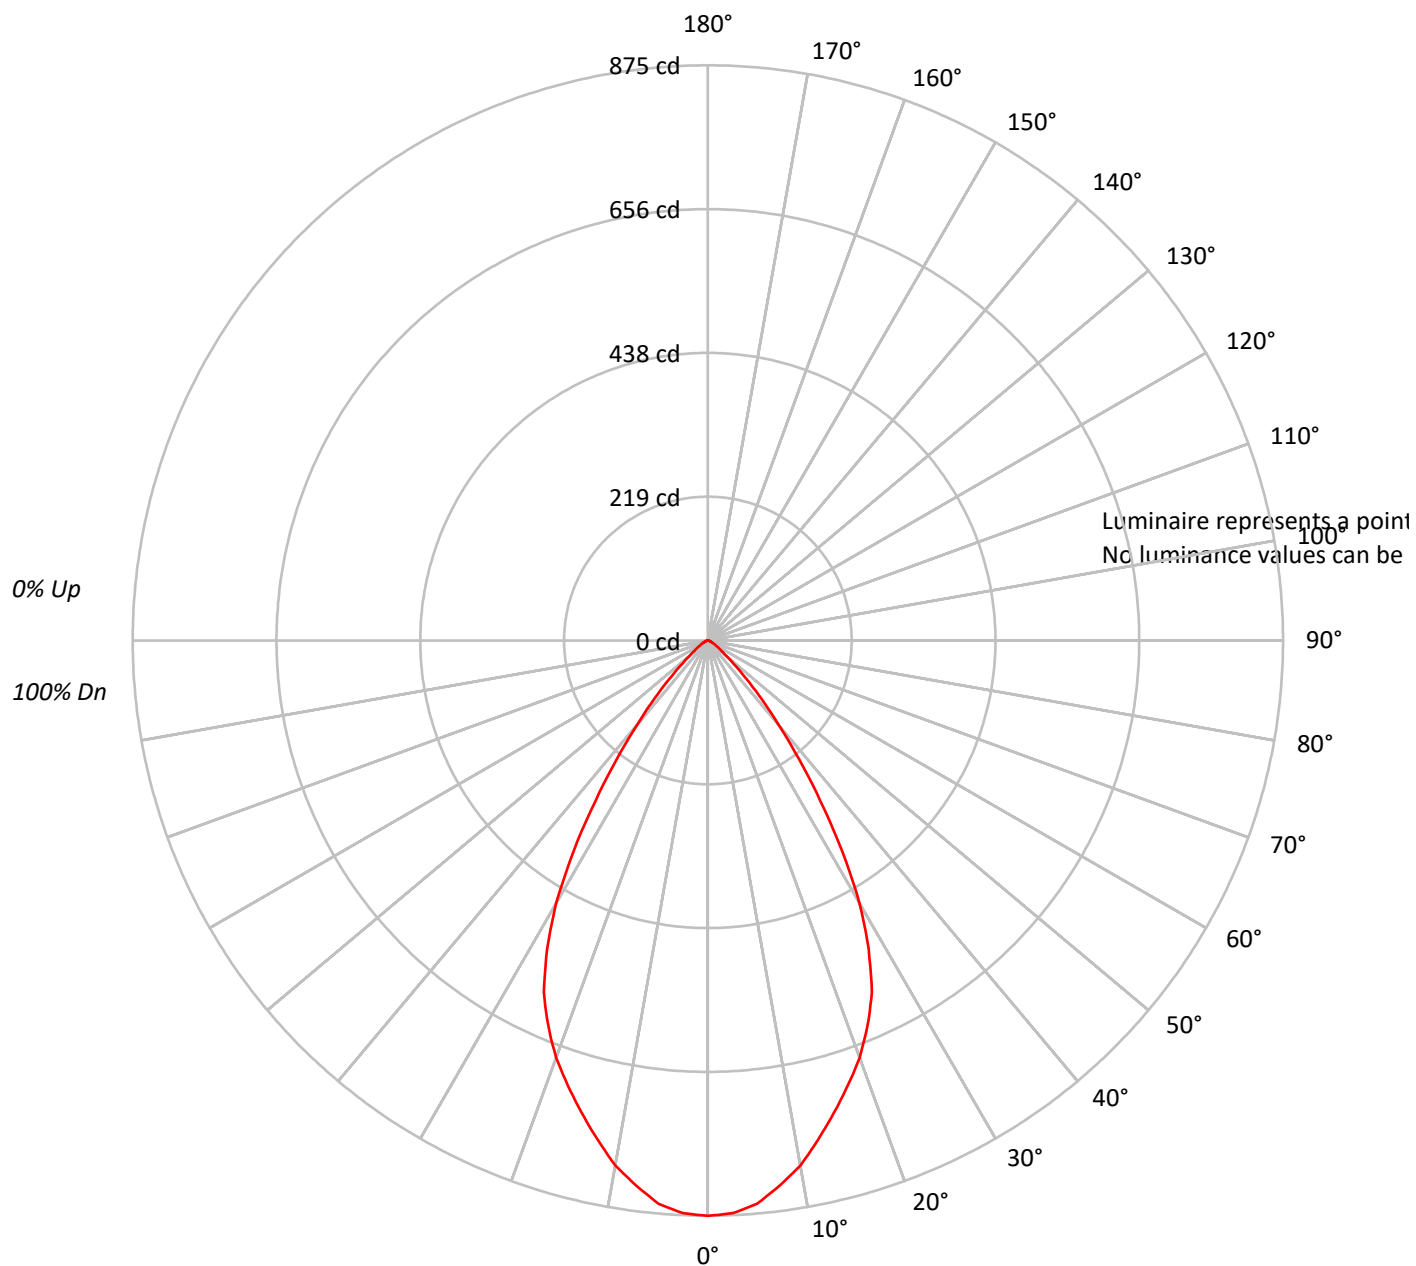




TEST NUMBER: P205489

CATALOG NUMBER: LE_6B15D010 EC6B10209027 6LBMGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	105		111	108	106	104		104	102	101		100	99	98		97	96	95
2	107	102	98	94		105	100	97	93		97	94	91		94	92	89		91	89	87
3	102	95	90	85		99	93	89	85		91	87	83		88	85	82		86	83	81
4	96	88	82	78		94	87	82	77		85	80	77		83	79	76		81	78	75
5	91	82	76	72		89	81	76	71		79	74	71		78	73	70		76	72	69
6	86	77	71	66		85	76	70	66		74	69	65		73	68	65		72	68	64
7	82	72	66	61		80	71	65	61		70	65	61		69	64	60		68	63	60
8	77	68	61	57		76	67	61	57		66	60	57		65	60	56		64	59	56
9	74	64	57	53		72	63	57	53		62	57	53		61	56	53		60	56	53
10	70	60	54	50		69	59	54	50		59	53	50		58	53	49		57	53	49

AVERAGE LUMINANCE (cd/sqm):

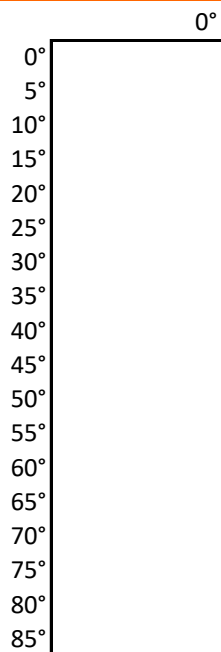



TEST NUMBER: P205489

CATALOG NUMBER: LE_6B15D010 EC6B10209027 6LBMGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.4	9.6
10°-20°	208.7	24.8
20°-30°	265.9	31.6
30°-40°	187.9	22.4
40°-50°	68.6	8.2
50°-60°	19.0	2.3
60°-70°	6.9	0.8
70°-80°	2.5	0.3
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	555.0	66.1
0°-40°	742.9	88.4
0°-60°	830.5	98.8
0°-90°	840.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	840.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	875	
5°	860	80
15°	743	209
25°	590	266
35°	299	188
45°	83	69
55°	20	19
65°	7	7
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P205489

CATALOG NUMBER: LE_6B15D010 EC6B10209027 6LBMGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	875.4
2.5°	872.0
5°	860.1
7.5°	836.4
10°	810.9
12.5°	777.0
15°	743.1
17.5°	709.1
20°	675.2
22.5°	634.5
25°	590.4
27.5°	529.4
30°	461.5
32.5°	380.0
35°	298.6
37.5°	227.4
40°	166.2
42.5°	120.5
45°	83.1
47.5°	56.0
50°	37.4
52.5°	25.5
55°	20.4
57.5°	15.2
60°	11.9
62.5°	8.5
65°	6.8
67.5°	5.1
70°	3.4
72.5°	3.4
75°	1.8
77.5°	1.8
80°	1.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)