

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203125

Luminaire Tested: **LE_6B15D010 EC6B10209027 6LBWMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203125
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10209027 6LBWMW1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1423.1 lumens
Efficiency: N/A
Efficacy: 99.5 lumens/watt
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.15
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203125

CATALOG NUMBER: LE_6B15D010 EC6B10209027 6LBWMW1

Luminous Intensity Polar Plot

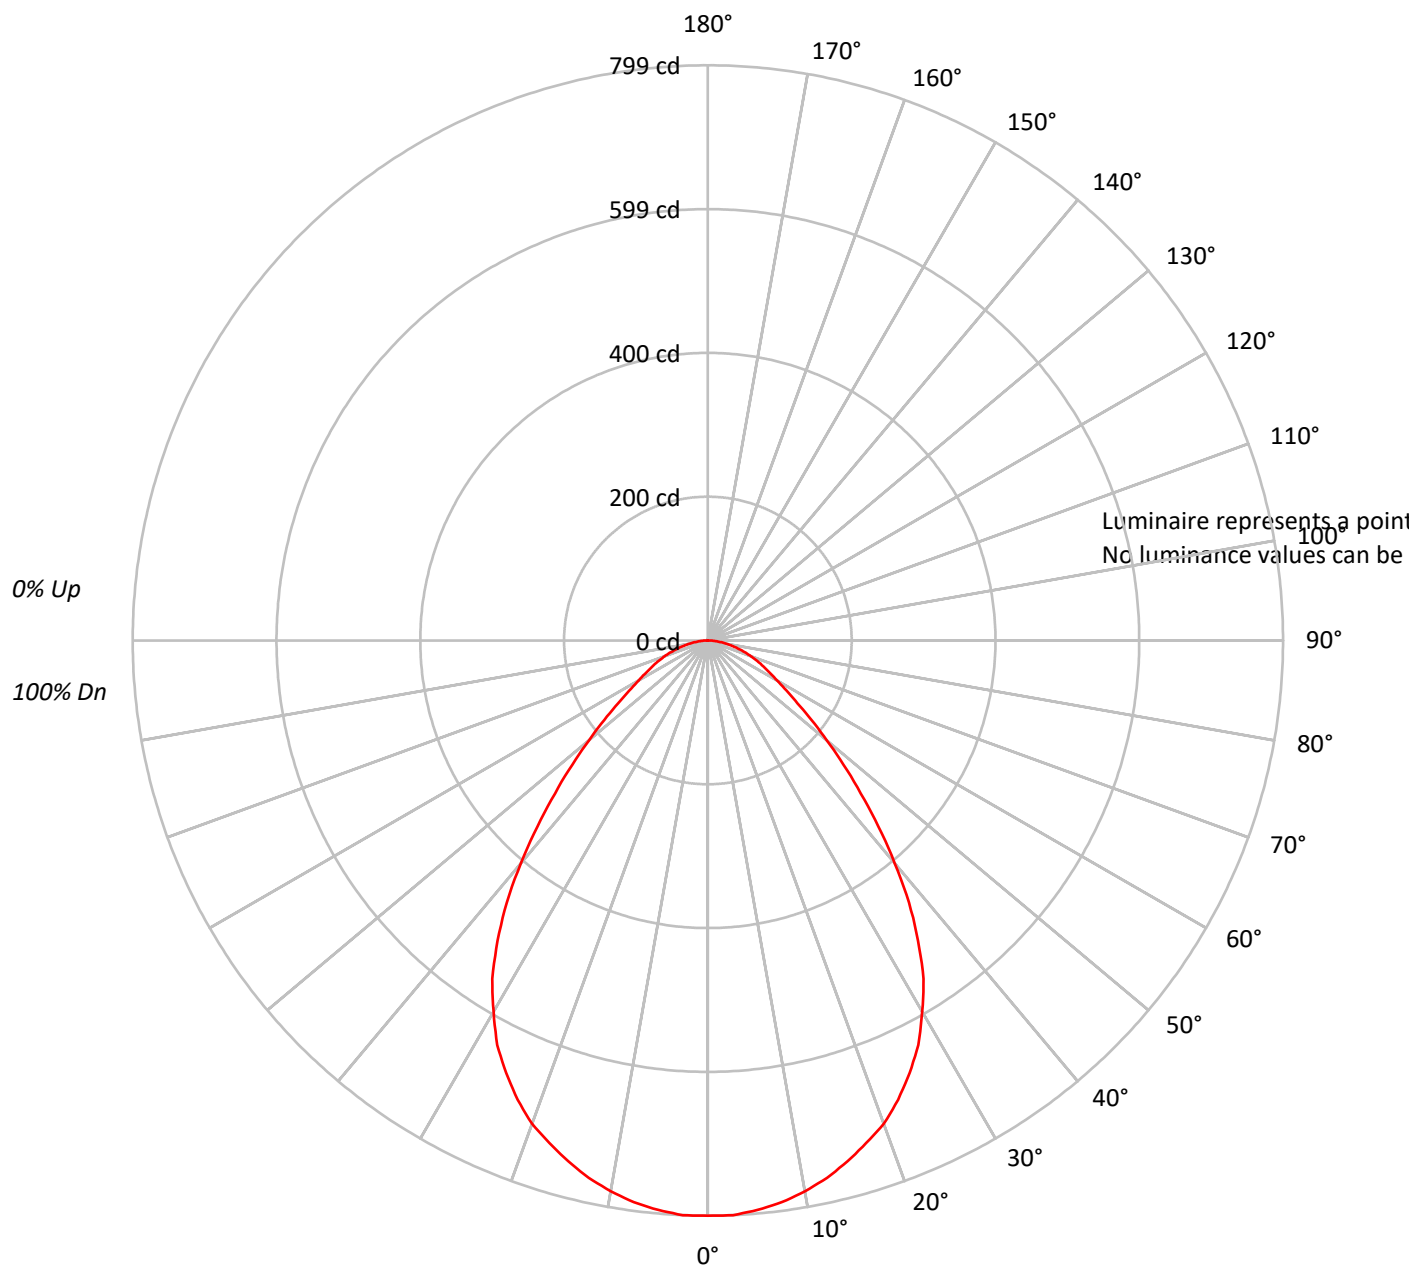



TEST NUMBER: P203125

CATALOG NUMBER: LE_6B15D010 EC6B10209027 6LBWMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	104	100		108	105	102	99		101	98	96		97	95	93		93	92	90
2	103	96	90	86		100	94	89	85		91	86	83		88	84	81		85	82	79
3	95	86	80	74		93	85	79	74		82	77	72		80	75	71		77	73	70
4	89	78	71	65		86	77	70	65		75	69	64		72	67	63		70	66	62
5	82	71	64	58		80	70	63	58		68	62	57		66	61	56		65	60	56
6	77	65	57	52		75	64	57	52		63	56	51		61	55	51		60	54	50
7	72	60	52	47		70	59	52	47		58	51	46		56	50	46		55	50	46
8	67	55	48	42		66	55	47	42		53	47	42		52	46	42		51	46	42
9	63	51	44	39		62	51	44	39		50	43	39		49	43	38		48	42	38
10	60	48	40	36		58	47	40	36		46	40	36		45	40	35		45	39	35

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203125

CATALOG NUMBER: LE_6B15D010 EC6B10209027 6LBWMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.3	5.3
10°-20°	211.1	14.8
20°-30°	304.1	21.4
30°-40°	315.7	22.2
40°-50°	233.5	16.4
50°-60°	139.5	9.8
60°-70°	84.7	6.0
70°-80°	46.4	3.3
80°-90°	12.9	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	590.5	41.5
0°-40°	906.2	63.7
0°-60°	1279.1	89.9
0°-90°	1423.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1423.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	799	
5°	794	75
15°	749	211
25°	663	304
35°	509	316
45°	300	233
55°	152	139
65°	85	85
75°	43	46
85°	10	13
90°	0	



TEST NUMBER: P203125

CATALOG NUMBER: LE_6B15D010 EC6B10209027 6LBWMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	799.1
2.5°	799.1
5°	794.0
7.5°	787.1
10°	776.8
12.5°	764.6
15°	749.1
17.5°	731.9
20°	714.6
22.5°	690.4
25°	662.9
27.5°	633.5
30°	595.5
32.5°	557.5
35°	509.2
37.5°	459.1
40°	403.9
42.5°	350.4
45°	300.4
47.5°	255.5
50°	215.8
52.5°	181.2
55°	151.9
57.5°	129.5
60°	110.5
62.5°	96.6
65°	84.6
67.5°	74.2
70°	63.9
72.5°	53.5
75°	43.1
77.5°	34.5
80°	25.9
82.5°	19.0
85°	10.4
87.5°	5.1
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)