

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204668

Luminaire Tested: **LE_6B15D010 EC6B10208035 6LBPSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204668
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10208035 6LBPSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2040.7 lumens
Efficiency: N/A
Efficacy: 142.7 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204668

CATALOG NUMBER: LE_6B15D010 EC6B10208035 6LBPSMW1

Luminous Intensity Polar Plot

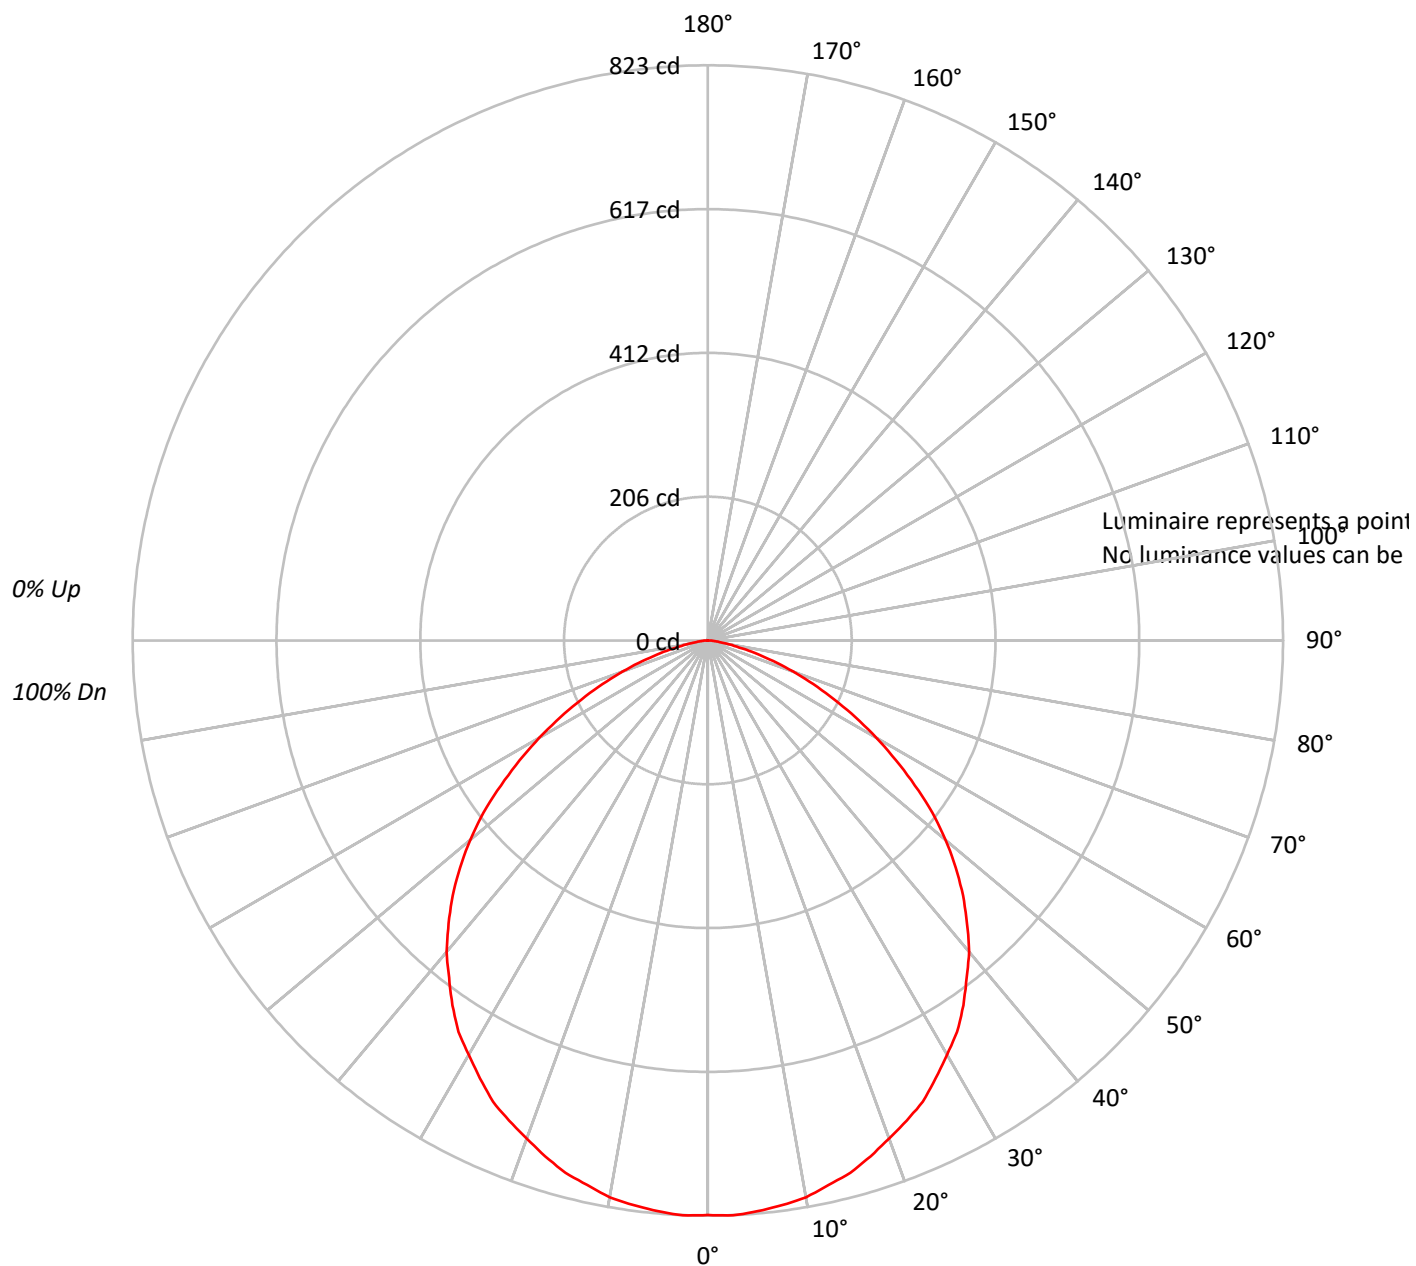




TEST NUMBER: P204668

CATALOG NUMBER: LE_6B15D010 EC6B10208035 6LBPSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86		
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74		
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63		
4	85	74	66	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54		
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47		
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42		
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37		
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33		
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30		
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27		

AVERAGE LUMINANCE (cd/sqm):

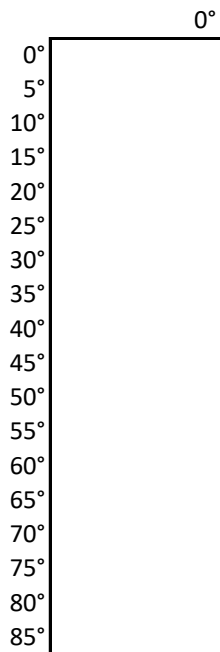



TEST NUMBER: P204668

CATALOG NUMBER: LE_6B15D010 EC6B10208035 6LBPSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.9	3.8
10°-20°	222.1	10.9
20°-30°	334.4	16.4
30°-40°	398.0	19.5
40°-50°	397.2	19.5
50°-60°	323.0	15.8
60°-70°	198.7	9.7
70°-80°	77.0	3.8
80°-90°	12.3	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	634.4	31.1
0°-40°	1032.4	50.6
0°-60°	1752.6	85.9
0°-90°	2040.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2040.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	822	
5°	820	78
15°	788	222
25°	728	334
35°	637	398
45°	516	397
55°	362	323
65°	200	199
75°	70	77
85°	10	12
90°	0	



TEST NUMBER: P204668

CATALOG NUMBER: LE_6B15D010 EC6B10208035 6LBPSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	822.2
2.5°	823.4
5°	819.8
7.5°	815.0
10°	808.9
12.5°	798.0
15°	788.4
17.5°	773.9
20°	758.1
22.5°	743.6
25°	727.9
27.5°	706.1
30°	684.4
32.5°	663.9
35°	637.2
37.5°	608.2
40°	581.6
42.5°	549.0
45°	516.2
47.5°	481.2
50°	443.8
52.5°	405.0
55°	361.5
57.5°	319.2
60°	278.1
62.5°	238.2
65°	199.5
67.5°	163.2
70°	129.4
72.5°	98.0
75°	70.1
77.5°	46.0
80°	27.8
82.5°	16.9
85°	9.6
87.5°	4.9
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)