

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202709

Luminaire Tested: **LE_6B15D010 EC6B10208035 6LBWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202709
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10208035 6LBWH1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1661.5 lumens
Efficiency: N/A
Efficacy: 116.2 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202709

CATALOG NUMBER: LE_6B15D010 EC6B10208035 6LBWH1

Luminous Intensity Polar Plot

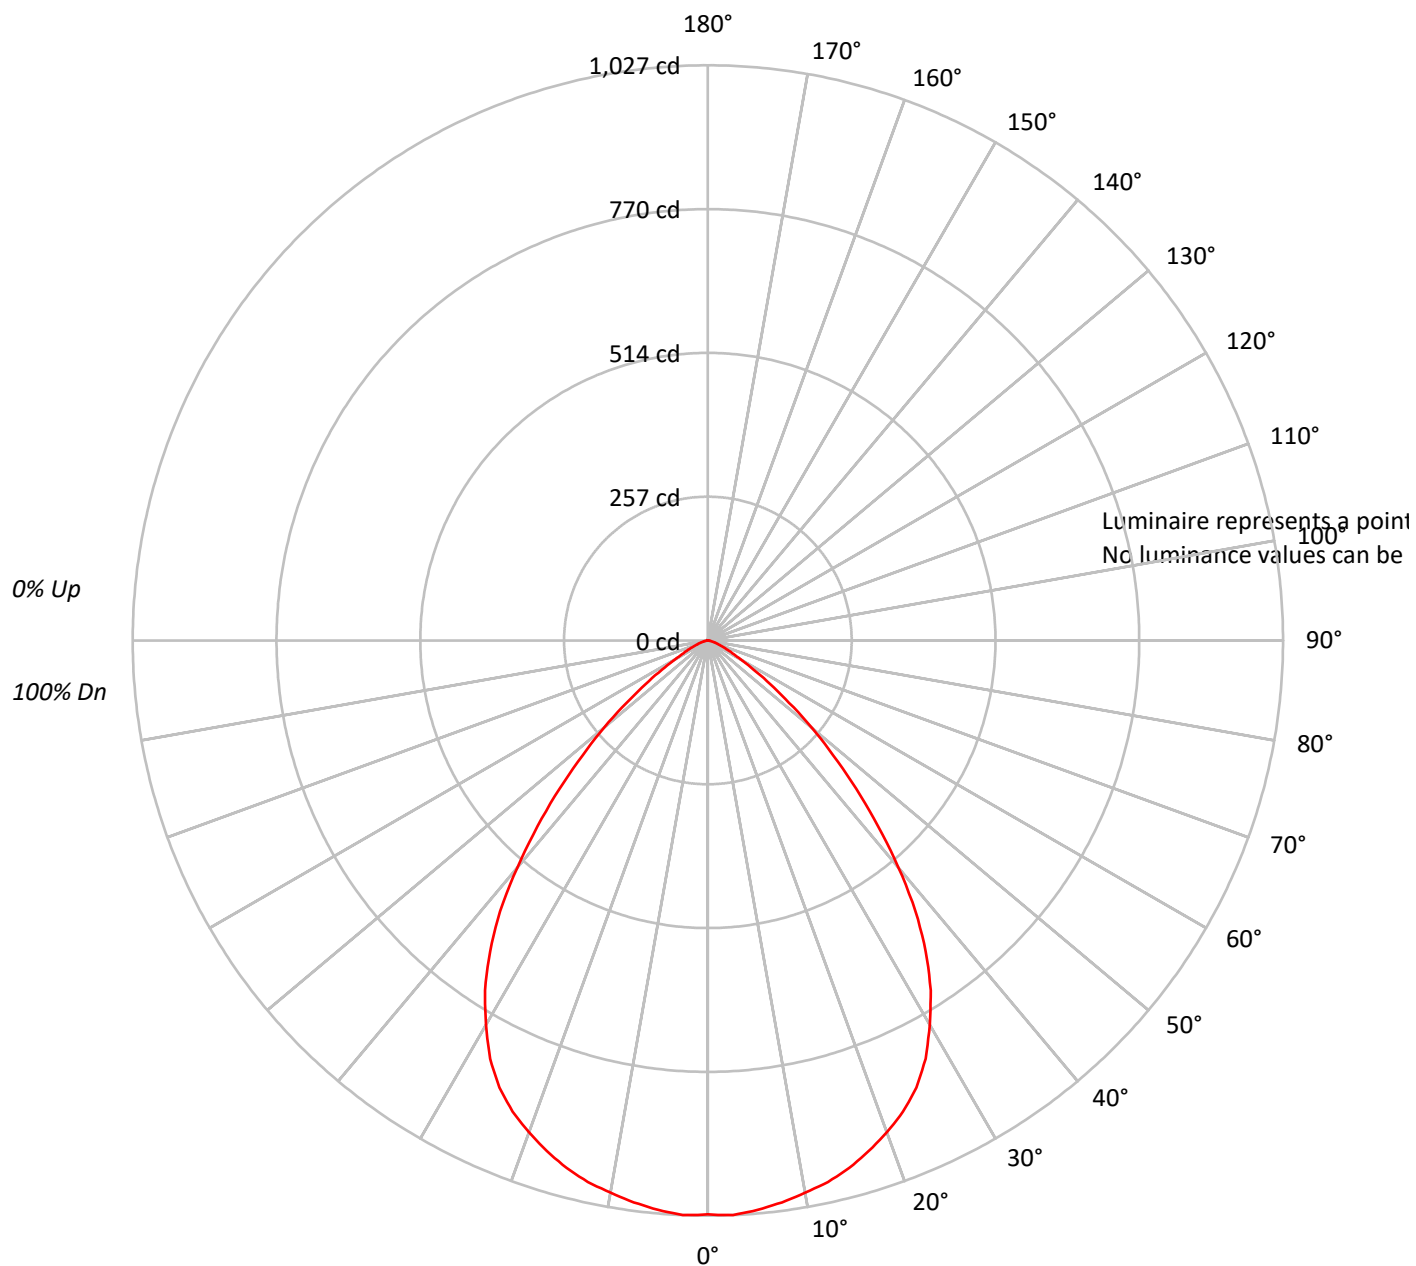




TEST NUMBER: P202709

CATALOG NUMBER: LE_6B15D010 EC6B10208035 6LBWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	103	100	98		99	97	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	98	90	84	79	96	89	83	78	86	81	77		83	79	76		81
4	92	82	75	70	90	81	75	70	79	73	69		77	72	68		75
5	86	75	68	63	84	74	68	63	72	66	62		71	65	61		69
6	80	69	62	57	78	68	61	56	67	61	56		65	60	56		64
7	75	64	56	51	73	63	56	51	62	55	51		60	55	51		59
8	70	59	52	47	69	58	51	47	57	51	46		56	50	46		55
9	66	55	48	43	65	54	47	43	53	47	43		52	47	42		51
10	62	51	44	40	61	50	44	39	50	43	39		49	43	39		48

AVERAGE LUMINANCE (cd/sqm):

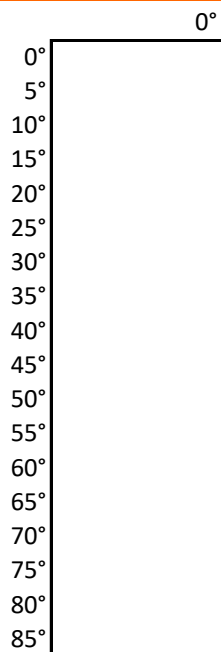



TEST NUMBER: P202709

CATALOG NUMBER: LE_6B15D010 EC6B10208035 6LBWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	96.8	5.8
10°-20°	274.6	16.5
20°-30°	402.7	24.2
30°-40°	419.1	25.2
40°-50°	290.0	17.5
50°-60°	126.2	7.6
60°-70°	38.7	2.3
70°-80°	11.6	0.7
80°-90°	1.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	774.1	46.6
0°-40°	1193.2	71.8
0°-60°	1609.4	96.9
0°-90°	1661.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1661.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1025	
5°	1020	97
15°	975	275
25°	881	403
35°	678	419
45°	375	290
55°	136	126
65°	37	39
75°	11	12
85°	2	2
90°	0	



TEST NUMBER: P202709

CATALOG NUMBER: LE_6B15D010 EC6B10208035 6LBWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1024.9
2.5°	1027.0
5°	1020.5
7.5°	1011.9
10°	1001.1
12.5°	990.4
15°	975.2
17.5°	955.9
20°	934.4
22.5°	910.8
25°	880.6
27.5°	841.9
30°	792.2
32.5°	740.6
35°	678.2
37.5°	609.2
40°	529.6
42.5°	450.0
45°	374.6
47.5°	303.6
50°	241.1
52.5°	183.0
55°	135.6
57.5°	96.9
60°	66.8
62.5°	49.5
65°	36.6
67.5°	28.0
70°	19.4
72.5°	15.1
75°	10.8
77.5°	6.5
80°	4.2
82.5°	2.1
85°	2.1
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)