

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202612

Luminaire Tested: **LE_6B15D010 EC6B10209035 6LBMWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202612
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10209035 6LBMWMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH WARM HAZE TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1245.5 lumens
Efficiency: N/A
Efficacy: 87.1 lumens/watt
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.89
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202612

CATALOG NUMBER: LE_6B15D010 EC6B10209035 6LBMWMH1

Luminous Intensity Polar Plot

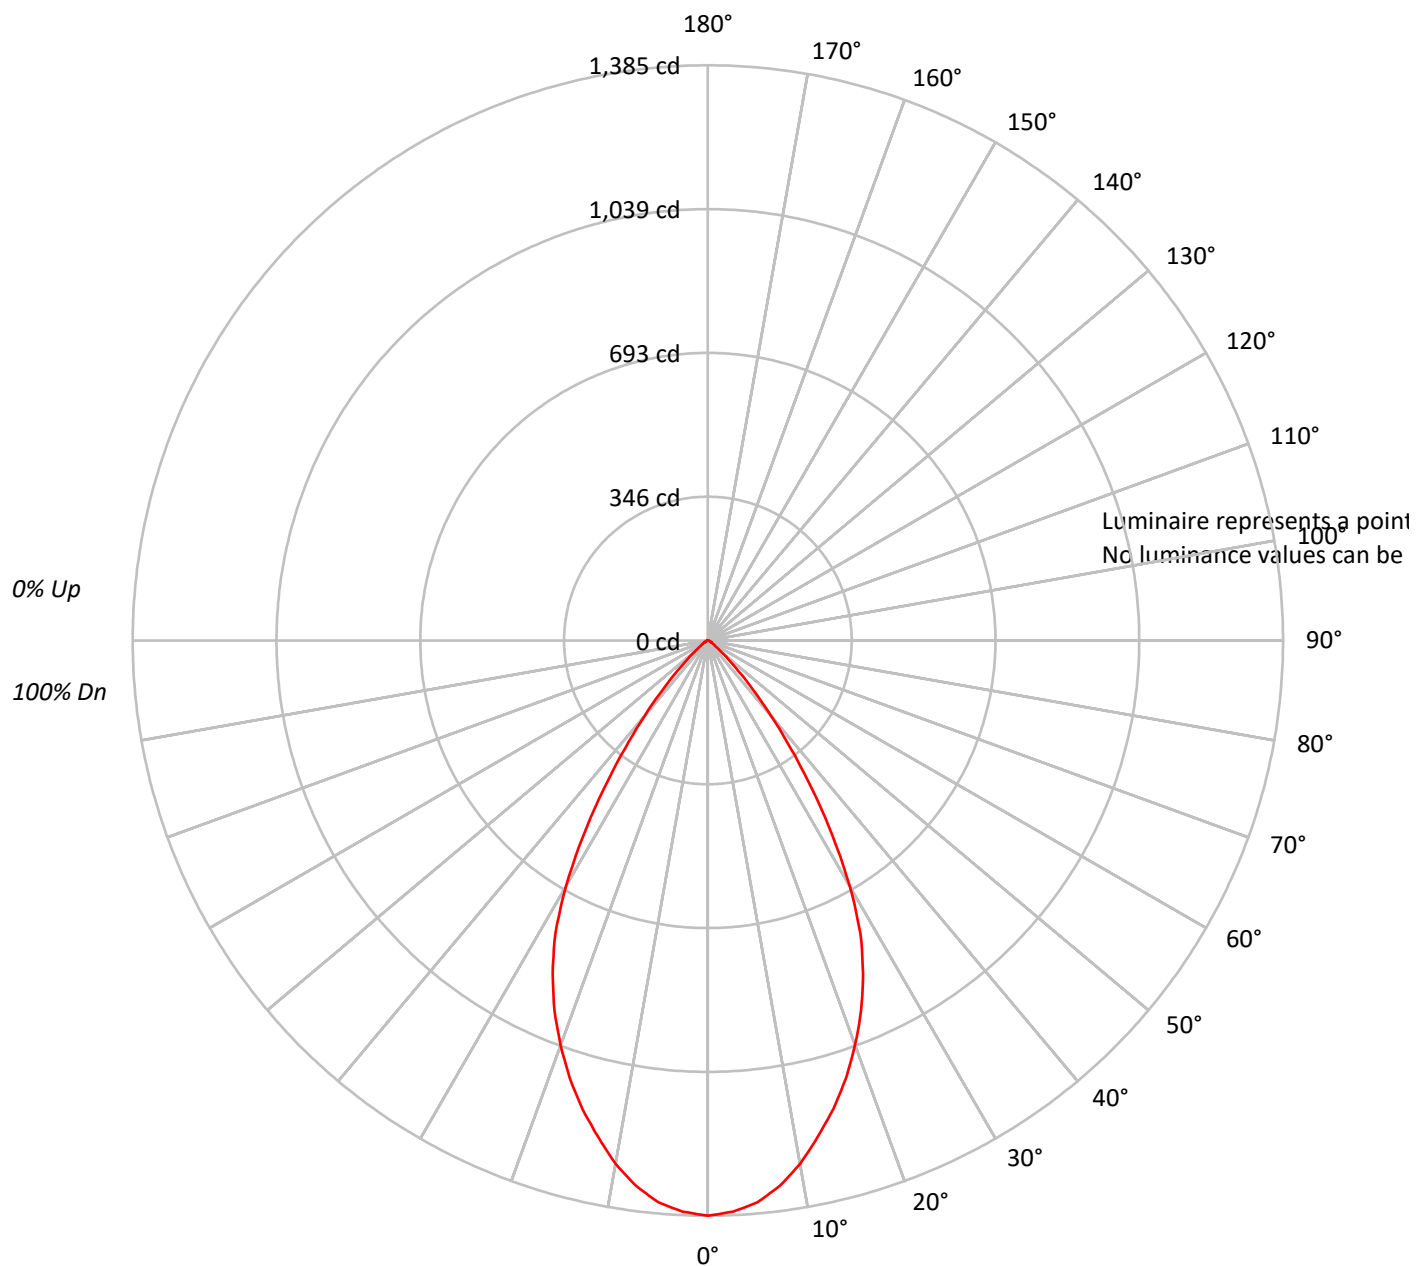



TEST NUMBER: P202612

CATALOG NUMBER: LE_6B15D010 EC6B10209035 6LBMWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10				0			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93						
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86						
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80						
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74						
5	92	83	77	73	90	82	77	73	80	76	72	79	75	71	77	74	71	69						
6	87	78	72	67	85	77	71	67	76	71	67	74	70	66	73	69	66	64						
7	83	73	67	63	81	72	67	63	71	66	62	70	65	62	69	65	62	60						
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56						
9	75	65	59	55	73	64	59	55	63	58	54	62	58	54	62	57	54	53						
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50						

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202612

CATALOG NUMBER: LE_6B15D010 EC6B10209035 6LBMWMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.1	10.2
10°-20°	326.3	26.2
20°-30°	400.8	32.2
30°-40°	274.9	22.1
40°-50°	88.4	7.1
50°-60°	17.9	1.4
60°-70°	7.0	0.6
70°-80°	2.6	0.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	854.3	68.6
0°-40°	1129.1	90.7
0°-60°	1235.4	99.2
0°-90°	1245.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1245.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1385	
5°	1359	127
15°	1168	326
25°	884	401
35°	438	275
45°	105	88
55°	18	18
65°	7	7
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P202612

CATALOG NUMBER: LE_6B15D010 EC6B10209035 6LBMWMH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	1385.1
2.5°	1376.6
5°	1358.6
7.5°	1324.9
10°	1279.5
12.5°	1223.5
15°	1167.5
17.5°	1105.1
20°	1036.5
22.5°	964.6
25°	884.2
27.5°	795.5
30°	683.6
32.5°	560.0
35°	438.5
37.5°	327.5
40°	235.6
42.5°	160.6
45°	104.6
47.5°	64.5
50°	39.1
52.5°	24.2
55°	18.0
57.5°	13.8
60°	10.6
62.5°	8.5
65°	7.4
67.5°	5.2
70°	4.2
72.5°	3.1
75°	2.1
77.5°	2.1
80°	1.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)