

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202818

Luminaire Tested: **LE_6B15D010 EC6B10209035 6LBWWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202818
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10209035 6LBWWH1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1451.5 lumens
Efficiency: N/A
Efficacy: 101.5 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202818

CATALOG NUMBER: LE_6B15D010 EC6B10209035 6LBWWH1

Luminous Intensity Polar Plot

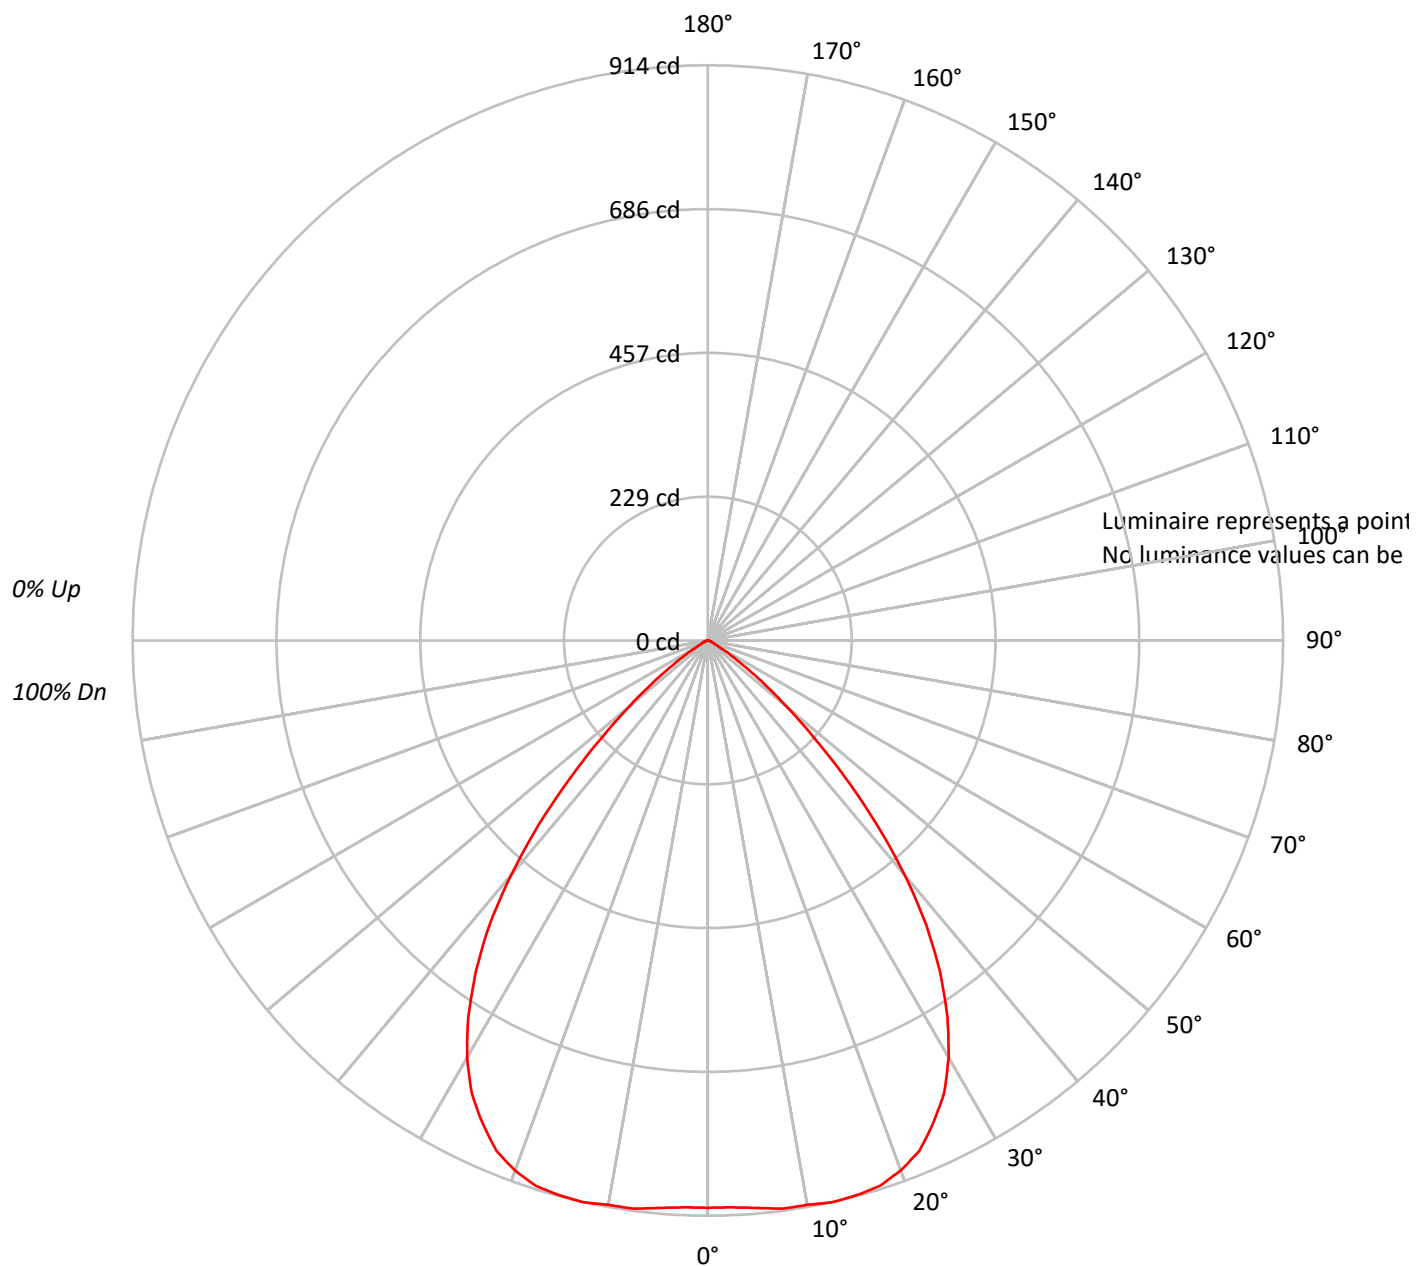




TEST NUMBER: P202818

CATALOG NUMBER: LE_6B15D010 EC6B10209035 6LBWWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	99	92	86	81	97	90	85	81	88	83	79		85	81	78		83
4	93	84	78	73	91	83	77	72	81	76	71		79	74	71		77
5	87	77	71	66	85	76	70	65	75	69	65		73	68	64		71
6	82	71	64	59	80	71	64	59	69	63	59		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	54	49	71	61	54	49	59	53	49		58	53	49		57
9	68	57	50	45	67	56	50	45	55	49	45		54	49	45		53
10	64	53	46	42	63	53	46	42	52	46	42		51	45	42		50

AVERAGE LUMINANCE (cd/sqm):

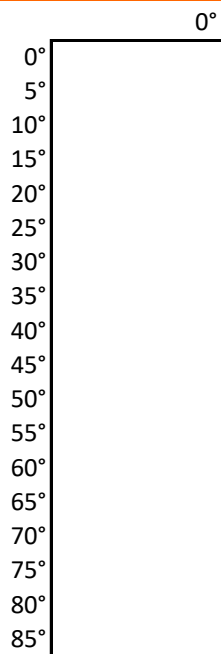



TEST NUMBER: P202818

CATALOG NUMBER: LE_6B15D010 EC6B10209035 6LBWWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.7	6.0
10°-20°	257.7	17.8
20°-30°	387.9	26.7
30°-40°	396.6	27.3
40°-50°	240.9	16.6
50°-60°	67.8	4.7
60°-70°	10.3	0.7
70°-80°	3.4	0.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	732.3	50.4
0°-40°	1128.9	77.8
0°-60°	1437.6	99.0
0°-90°	1451.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1451.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	902	
5°	905	87
15°	912	258
25°	847	388
35°	643	397
45°	310	241
55°	67	68
65°	9	10
75°	4	3
85°	0	0
90°	0	



TEST NUMBER: P202818

CATALOG NUMBER: LE_6B15D010 EC6B10209035 6LBWWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	901.5
2.5°	901.5
5°	905.1
7.5°	910.6
10°	910.6
12.5°	914.2
15°	912.5
17.5°	908.9
20°	896.1
22.5°	877.9
25°	846.9
27.5°	812.2
30°	765.0
32.5°	708.5
35°	642.9
37.5°	570.1
40°	486.2
42.5°	398.9
45°	309.6
47.5°	229.5
50°	162.1
52.5°	109.2
55°	67.4
57.5°	40.1
60°	20.0
62.5°	12.8
65°	9.1
67.5°	7.2
70°	5.5
72.5°	3.6
75°	3.6
77.5°	1.9
80°	1.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)