

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204882

Luminaire Tested: **LE_6B15D010 EC6B10209050 6LBCSMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204882
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B15D010 EC6B10209050 6LBCSMB1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE BLACK TRIM
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W
DL3-15.28 W DLE-15.432 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1481.7 lumens
Efficiency: N/A
Efficacy: 103.6 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204882

CATALOG NUMBER: LE_6B15D010 EC6B10209050 6LBCSMB1

Luminous Intensity Polar Plot

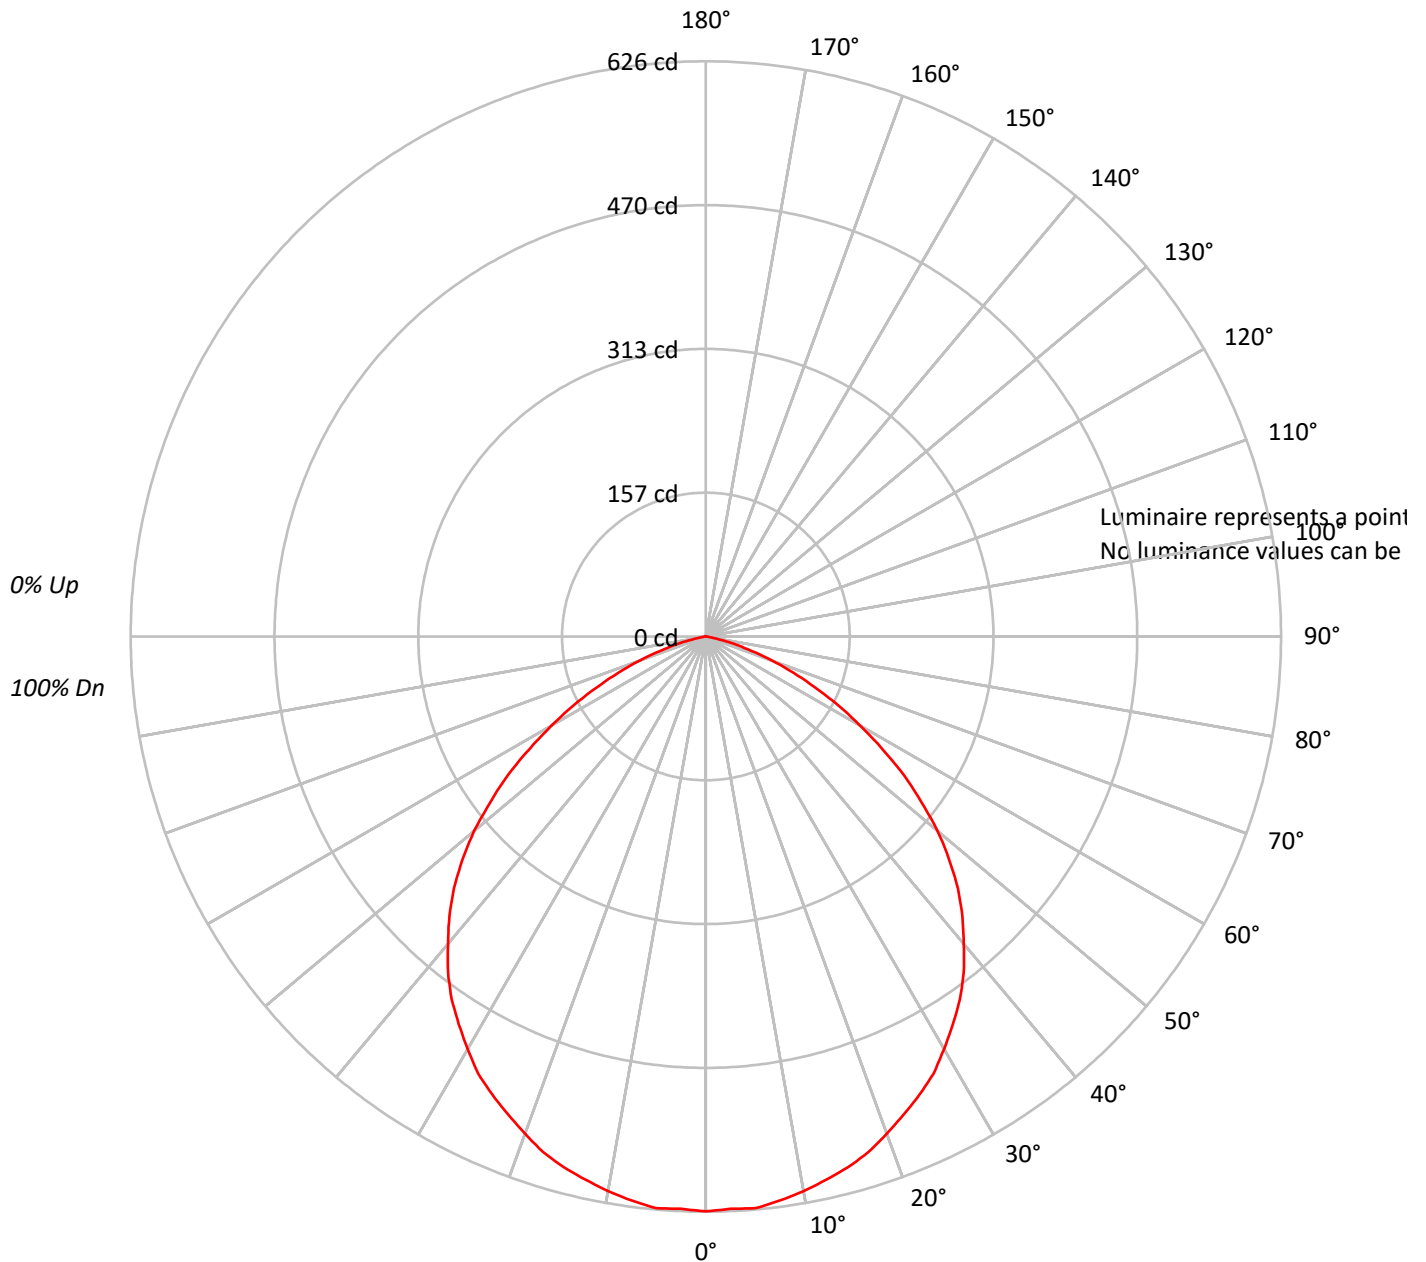



TEST NUMBER: P204882

CATALOG NUMBER: LE_6B15D010 EC6B10209050 6LBCSMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	103	100	108	104	101	98		100	98	95		96	94	92		93	91	90
2	102	95	89	84	99	93	87	83		89	85	81		86	82	79		83	80	77
3	93	84	77	71	91	83	76	70		80	74	69		77	72	68		74	70	67
4	86	75	67	61	84	74	66	61		71	65	60		69	63	59		67	62	58
5	79	67	59	53	77	66	59	53		64	57	52		62	56	52		61	55	51
6	74	61	53	47	72	60	52	46		58	51	46		57	50	46		55	50	45
7	68	55	47	41	67	55	47	41		53	46	41		52	45	41		50	45	40
8	64	51	43	37	62	50	42	37		49	42	37		48	41	37		46	41	36
9	60	47	39	33	58	46	39	33		45	38	33		44	38	33		43	37	33
10	56	43	35	30	55	43	35	30		42	35	30		41	34	30		40	34	30

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204882

CATALOG NUMBER: LE_6B15D010 EC6B10209050 6LBCSMB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.2	4.0
10°-20°	168.6	11.4
20°-30°	253.5	17.1
30°-40°	300.7	20.3
40°-50°	297.6	20.1
50°-60°	233.8	15.8
60°-70°	131.0	8.8
70°-80°	36.8	2.5
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	481.2	32.5
0°-40°	781.9	52.8
0°-60°	1313.3	88.6
0°-90°	1481.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1481.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	626	
5°	625	59
15°	598	169
25°	550	253
35°	482	301
45°	388	298
55°	264	234
65°	131	131
75°	32	37
85°	0	1
90°	0	



TEST NUMBER: P204882

CATALOG NUMBER: LE_6B15D010 EC6B10209050 6LBCSMB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	625.6
2.5°	623.5
5°	624.6
7.5°	619.2
10°	612.9
12.5°	605.5
15°	598.0
17.5°	588.5
20°	575.8
22.5°	563.0
25°	550.2
27.5°	536.5
30°	518.4
32.5°	500.4
35°	482.2
37.5°	461.0
40°	436.6
42.5°	413.2
45°	387.8
47.5°	359.0
50°	329.2
52.5°	295.2
55°	263.5
57.5°	227.4
60°	193.4
62.5°	162.5
65°	130.6
67.5°	103.0
70°	76.5
72.5°	52.0
75°	31.9
77.5°	15.9
80°	4.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)