

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843971

Luminaire Tested: **LD6C10DE010B35 EU6C10B35 6LBMMW**

Issue Date: 5/7/2024



Test Information

Test Method: LM-79-08
Report Number: P843971
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203577)
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD6C10DE010B35 EU6C10B35 6LBMMW
Description:
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 961.5 lumens
Efficiency: N/A
Efficacy: 72.3 lumens/watt
Spacing Criteria (0/90/45): 1 / 1 / 0.97
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P843971

CATALOG NUMBER: LD6C10DE010B35 EU6C10B35 6LBMMW

Luminous Intensity Polar Plot

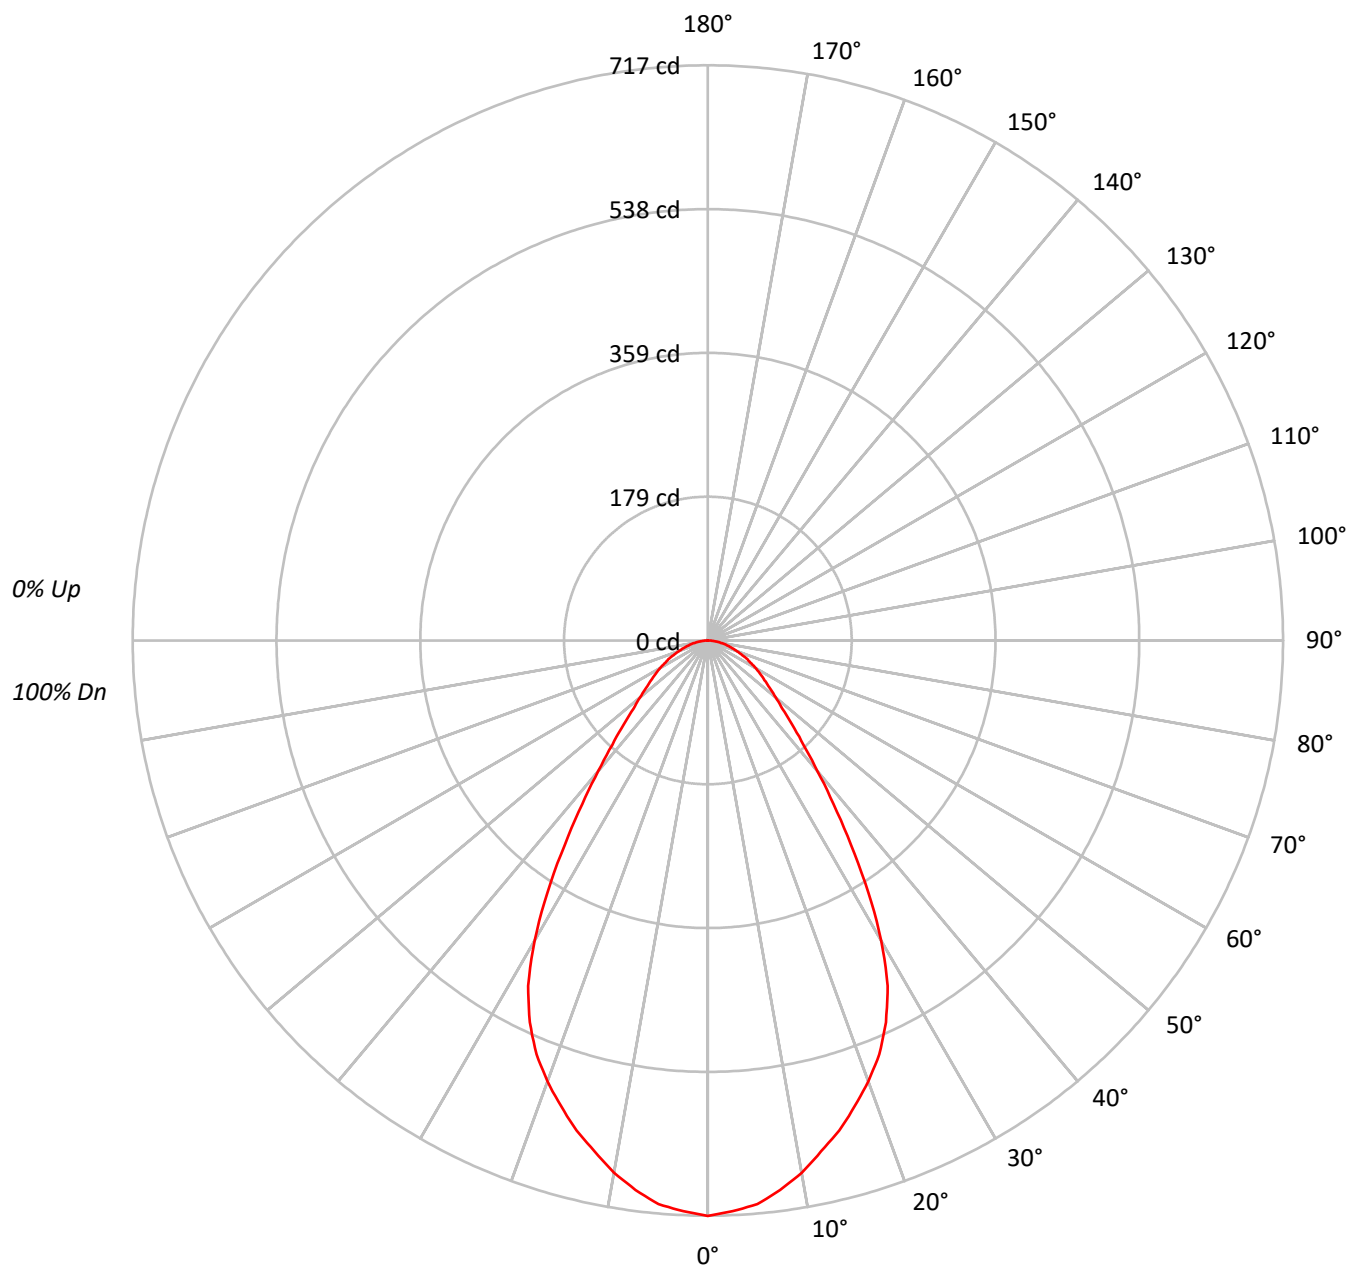



TEST NUMBER: P843971

CATALOG NUMBER: LD6C10DE010B35 EU6C10B35 6LBMMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	108	104	101		109	105	103	100		101	99	97		98	96	94		94	92	91
2	104	97	92	88		101	96	91	87		92	88	85		89	86	83		86	83	81
3	97	88	82	77		95	87	81	76		84	79	75		82	77	74		79	76	73
4	90	81	74	68		88	80	73	68		77	72	67		75	70	66		73	69	65
5	85	74	67	61		83	73	66	61		71	65	61		69	64	60		68	63	59
6	79	68	61	56		78	68	61	56		66	60	55		64	59	55		63	58	54
7	75	63	56	51		73	63	56	51		61	55	50		60	54	50		59	54	50
8	70	59	52	47		69	58	51	47		57	51	46		56	50	46		55	50	46
9	66	55	48	43		65	54	48	43		53	47	43		52	47	43		51	46	43
10	63	51	45	40		62	51	44	40		50	44	40		49	44	40		48	43	40

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	39328
5°	38818
10°	37497
15°	35897
20°	34116
25°	31762
30°	27365
35°	20766
40°	15186
45°	11513
50°	9390
55°	8239
60°	7565
65°	6888
70°	6155
75°	5613
80°	5051
85°	4214



TEST NUMBER: P843971

CATALOG NUMBER: LD6C10DE010B35 EU6C10B35 6LBMMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.3	6.9
10°-20°	177.5	18.5
20°-30°	238.3	24.8
30°-40°	195.5	20.3
40°-50°	117.4	12.2
50°-60°	78.0	8.1
60°-70°	52.3	5.4
70°-80°	28.1	2.9
80°-90°	8.0	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	482.1	50.1
0°-40°	677.6	70.5
0°-60°	873.1	90.8
0°-90°	961.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	961.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	717	
5°	705	66
15°	632	178
25°	525	238
35°	310	196
45°	148	117
55°	86	78
65°	53	52
75°	26	28
85°	7	8
90°	0	



TEST NUMBER: P843971

CATALOG NUMBER: LD6C10DE010B35 EU6C10B35 6LBMMW

CANDELA DISTRIBUTION (FULL):

	0°
0°	717.4
2.5°	712.0
5°	705.4
7.5°	690.8
10°	673.6
12.5°	652.3
15°	632.5
17.5°	608.7
20°	584.8
22.5°	558.2
25°	525.1
27.5°	485.3
30°	432.3
32.5°	372.6
35°	310.3
37.5°	257.2
40°	212.2
42.5°	176.4
45°	148.5
47.5°	126.0
50°	110.1
52.5°	96.8
55°	86.2
57.5°	76.9
60°	69.0
62.5°	59.7
65°	53.1
67.5°	45.1
70°	38.4
72.5°	31.8
75°	26.5
77.5°	21.2
80°	16.0
82.5°	12.0
85°	6.7
87.5°	2.6
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)