

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843977

Luminaire Tested: **LD6C10DE010B35 EU6C10B35 6LBWLI**

Issue Date: 2/17/2023



Test Information

Test Method: LM-79-08
Report Number: P843977
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205209)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD6C10DE010B35 EU6C10B35 6LBWLI
Description:
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1212.1 lumens
Efficiency: N/A
Efficacy: 91.1 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P843977

CATALOG NUMBER: LD6C10DE010B35 EU6C10B35 6LBWLI

Luminous Intensity Polar Plot

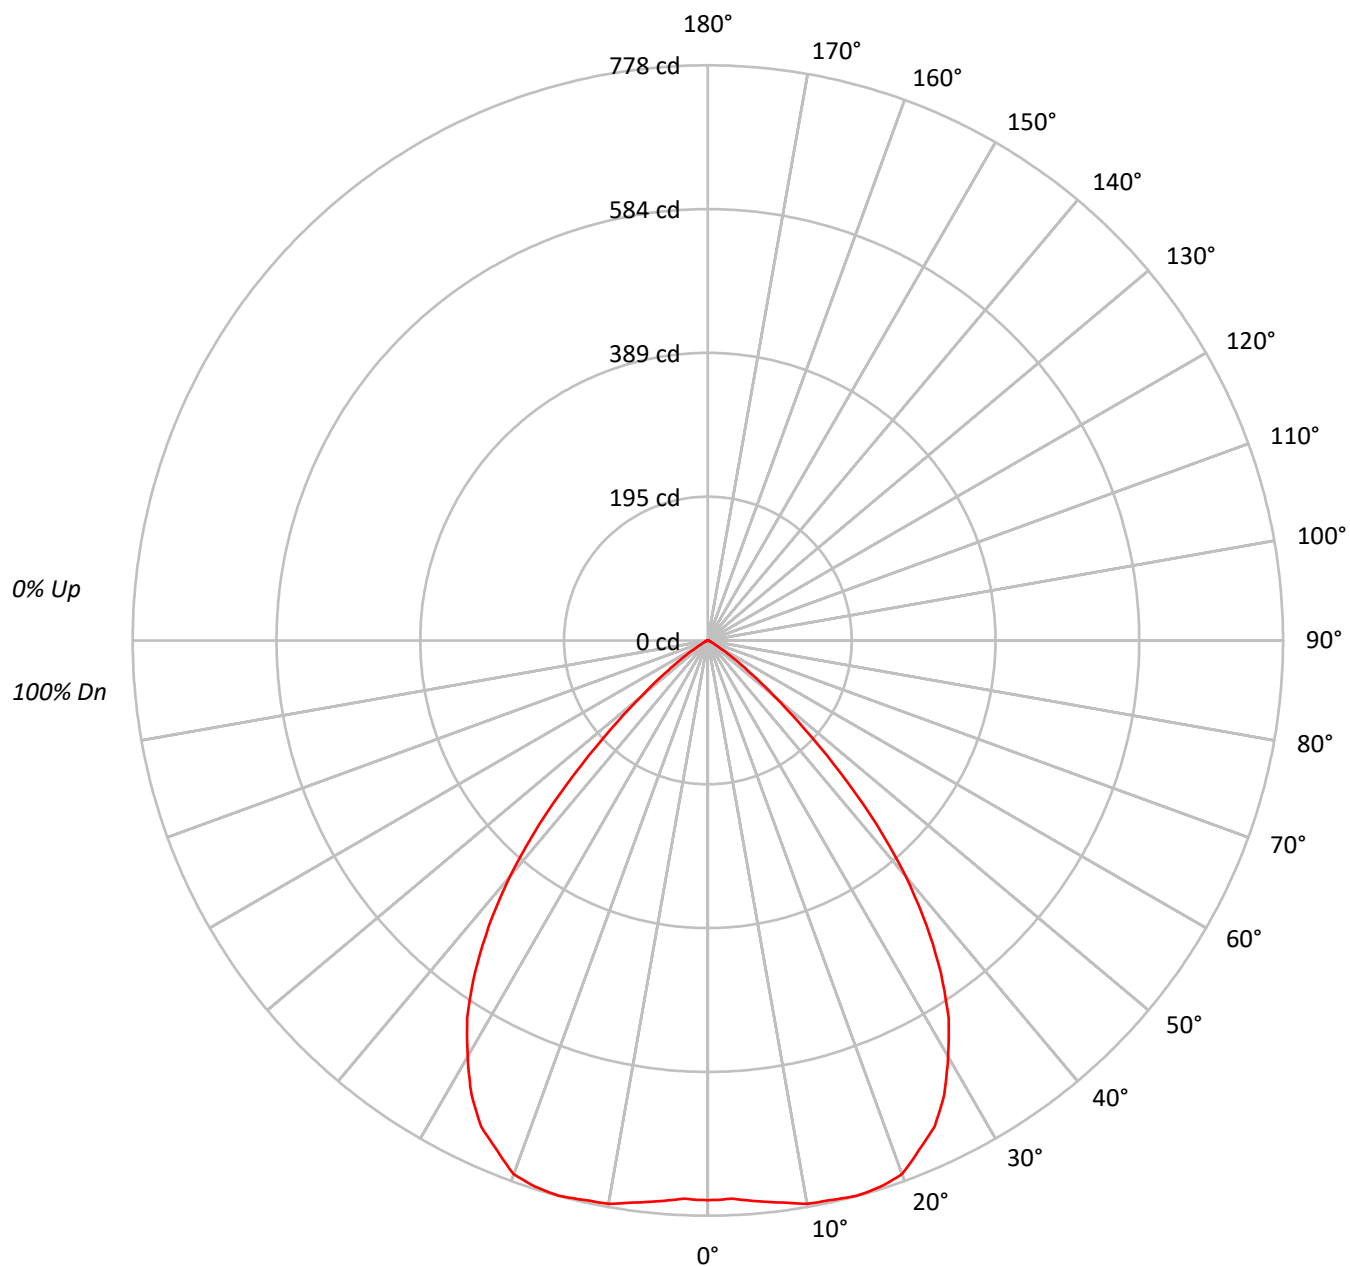



TEST NUMBER: P843977

CATALOG NUMBER: LD6C10DE010B35 EU6C10B35 6LBWL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	104	110	107	105	103	103	101	99		100	98	97		96
2	106	101	96	92	104	99	95	91	95	92	89		92	90	87		90
3	100	92	87	82	97	91	86	81	88	84	80		86	82	79		83
4	93	85	78	73	92	84	78	73	81	76	72		79	75	71		77
5	88	78	71	66	86	77	71	66	75	70	65		73	69	65		72
6	82	72	65	60	81	71	65	60	70	64	59		68	63	59		67
7	77	67	60	55	76	66	59	55	65	59	54		63	58	54		62
8	73	62	55	50	71	61	55	50	60	54	50		59	54	50		58
9	69	57	51	46	67	57	50	46	56	50	46		55	50	46		54
10	65	54	47	43	64	53	47	42	52	46	42		51	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	41510
5°	41894
10°	43069
15°	44143
20°	44816
25°	43884
30°	41146
35°	36788
40°	29799
45°	19715
50°	9970
55°	4205
60°	1360
65°	532
70°	433
75°	297
80°	0
85°	0



TEST NUMBER: P843977

CATALOG NUMBER: LD6C10DE010B35 EU6C10B35 6LBWLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.0	6.0
10°-20°	219.6	18.1
20°-30°	331.0	27.3
30°-40°	338.7	27.9
40°-50°	197.4	16.3
50°-60°	45.4	3.7
60°-70°	5.6	0.5
70°-80°	1.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	623.6	51.4
0°-40°	962.3	79.4
0°-60°	1205.0	99.4
0°-90°	1212.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1212.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	757	
5°	761	73
15°	778	220
25°	726	331
35°	550	339
45°	254	197
55°	44	45
65°	4	6
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P843977

CATALOG NUMBER: LD6C10DE010B35 EU6C10B35 6LBWLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	757.2
2.5°	755.8
5°	761.3
7.5°	766.8
10°	773.7
12.5°	775.0
15°	777.8
17.5°	775.0
20°	768.2
22.5°	746.2
25°	725.5
27.5°	692.6
30°	650.0
32.5°	606.0
35°	549.7
37.5°	486.4
40°	416.4
42.5°	338.0
45°	254.3
47.5°	177.3
50°	116.9
52.5°	74.2
55°	44.0
57.5°	23.4
60°	12.4
62.5°	6.9
65°	4.1
67.5°	4.1
70°	2.7
72.5°	1.4
75°	1.4
77.5°	1.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)