

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P979653

Luminaire Tested: PRLX-241-927-LL8-F-U-S-WHTE-X

Issue Date: 4/3/2025

Test Information

Test Method: LM-79-2024
Report Number: P979653
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2502-353-12)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 4/3/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-241-927-LL8-F-U-S-WHTE-X
Description: 3D PRINTED LUMINAIRE, INTEGRAL LED LIGHT ENGINE, WHITE 241 SHADE WITH FROSTED LENS
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5740.8 lumens
Efficiency: N/A
Efficacy: 93.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.21 / 1.12
Luminous Opening: Circular (Dia: 1.33' x H: 0')
CIE Type: Direct

Input Watts (W): 61.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P979653
CATALOG NUMBER: PRLX-241-927-LL8-F-U-S-WHTE-X

Luminous Intensity Polar Plot

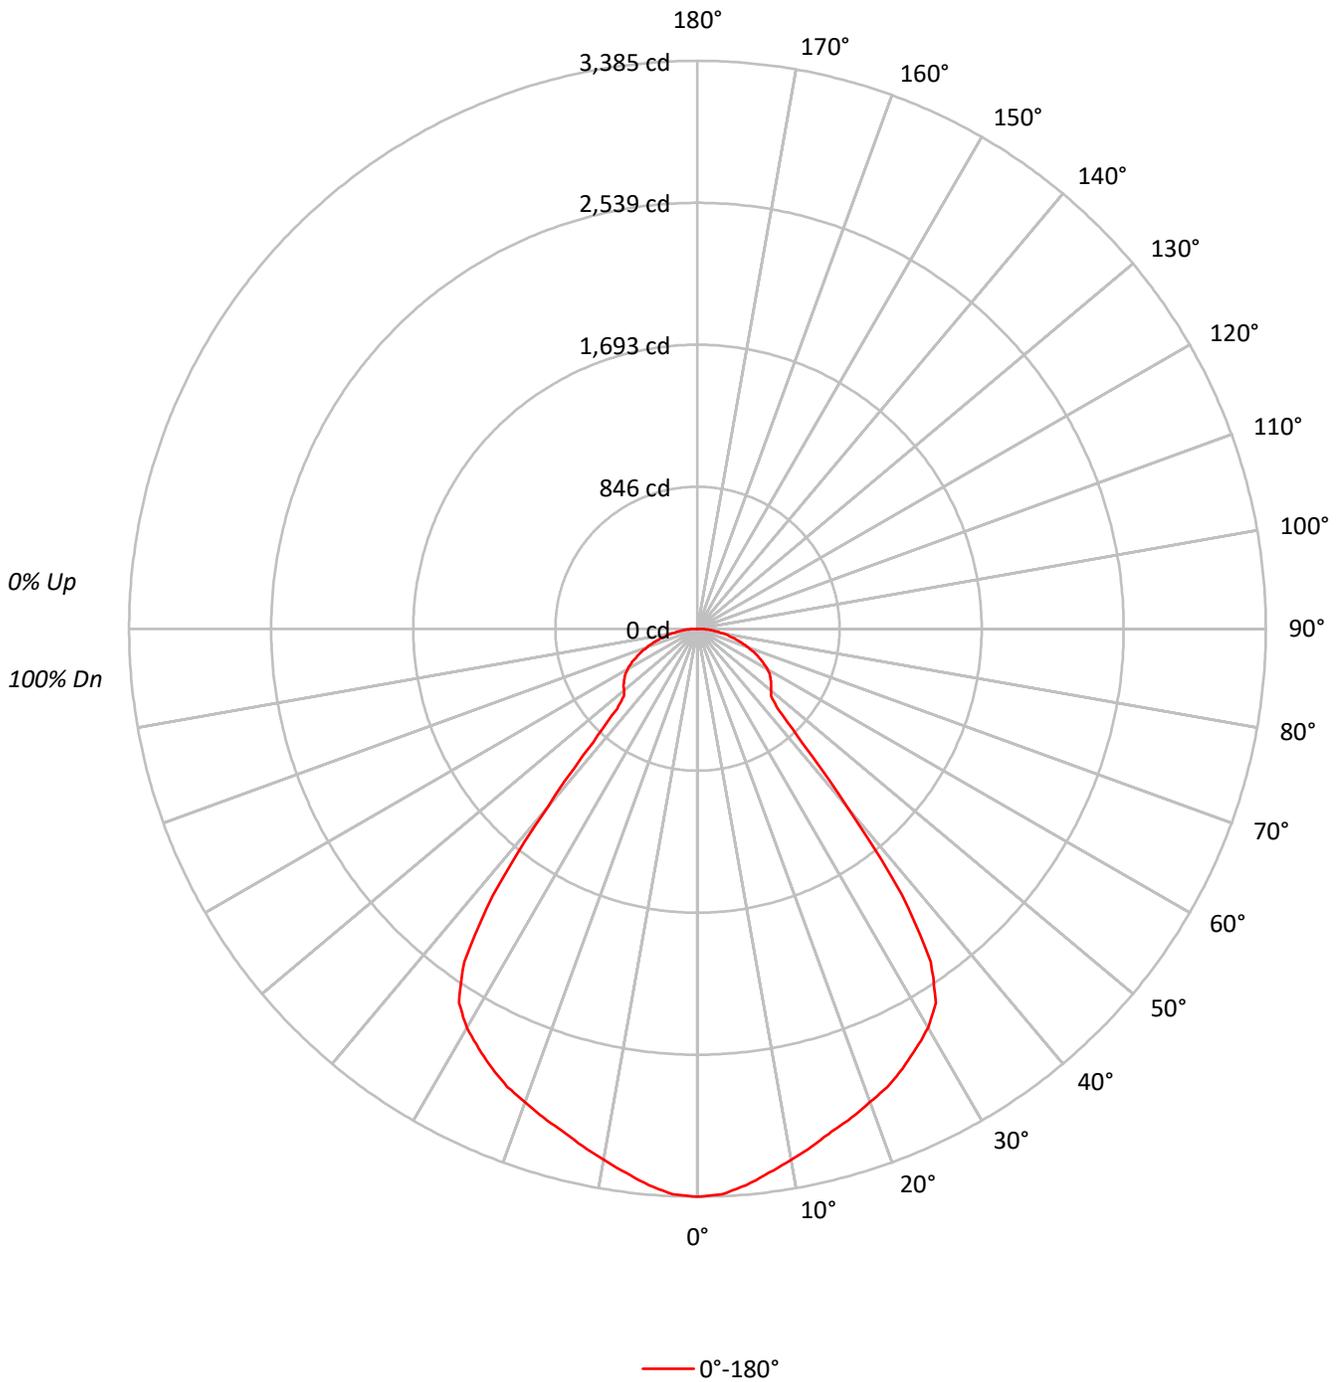



TEST NUMBER: P979653

CATALOG NUMBER: PRLX-241-927-LL8-F-U-S-WHTE-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	103	100	108	104	101	98	100	98	95		96	94	92		93	91	90	88
2	103	96	90	85	100	94	89	84	90	86	82		87	84	81		84	81	79	77
3	95	86	80	74	93	85	79	73	82	77	72		79	75	71		77	73	70	68
4	89	78	71	65	87	77	70	65	75	69	64		73	67	63		71	66	62	61
5	83	72	64	58	81	71	63	58	69	62	57		67	61	57		65	60	56	54
6	77	66	58	52	76	65	58	52	63	57	52		62	56	51		60	55	51	49
7	72	61	53	48	71	60	53	47	58	52	47		57	51	47		56	51	47	45
8	68	56	49	43	67	55	48	43	54	48	43		53	47	43		52	47	43	41
9	64	52	45	40	63	52	45	40	51	44	40		50	44	39		49	43	39	38
10	60	49	42	37	59	48	41	37	47	41	37		46	41	36		46	40	36	35

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	26094
5°	25759
10°	25163
15°	24743
20°	24638
25°	24592
30°	24449
35°	22806
40°	14038
45°	7381
50°	6852
55°	7157
60°	7413
65°	7355
70°	7143
75°	6806
80°	6411
85°	5909

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 62.5°
 Luminance: 7414 cd/sqm

TEST NUMBER: P979653

CATALOG NUMBER: PRLX-241-927-LL8-F-U-S-WHTE-X

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	314.0	5.5
10°-20°	877.3	15.3
20°-30°	1332.0	23.2
30°-40°	1419.3	24.7
40°-50°	606.4	10.6
50°-60°	475.6	8.3
60°-70°	397.5	6.9
70°-80°	242.2	4.2
80°-90°	76.5	1.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2523.3	44.0
0°-40°	3942.6	68.7
0°-60°	5024.6	87.5
0°-90°	5740.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5740.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3385	
5°	3329	314
15°	3100	877
25°	2891	1332
35°	2423	1419
45°	677	606
55°	532	476
65°	403	398
75°	228	242
85°	67	77
90°	0	

TEST NUMBER: P979653

CATALOG NUMBER: PRLX-241-927-LL8-F-U-S-WHTE-X

CANDELA DISTRIBUTION (FULL):

	0°
0°	3384.8
2.5°	3374.0
5°	3328.7
7.5°	3270.5
10°	3214.5
12.5°	3158.4
15°	3100.2
17.5°	3054.9
20°	3003.2
22.5°	2955.8
25°	2891.1
27.5°	2819.9
30°	2746.6
32.5°	2643.2
35°	2423.3
37.5°	2002.8
40°	1394.9
42.5°	920.6
45°	677.0
47.5°	592.9
50°	571.3
52.5°	554.1
55°	532.5
57.5°	511.0
60°	480.8
62.5°	444.1
65°	403.2
67.5°	360.0
70°	316.9
72.5°	271.6
75°	228.5
77.5°	187.6
80°	144.4
82.5°	105.6
85°	66.8
87.5°	36.7
90°	0.0



TEST NUMBER: P979653
 CATALOG NUMBER: PRLX-241-927-LL8-F-U-S-WHTE-X

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	17.34	18.68	17.70	18.99	19.31	17.34	18.68	17.70	18.99	19.31
	3H	19.34	20.54	19.72	20.87	21.24	19.34	20.54	19.72	20.87	21.24
	4H	20.10	21.22	20.50	21.57	21.96	20.10	21.22	20.50	21.57	21.96
	6H	20.68	21.72	21.10	22.09	22.49	20.68	21.72	21.10	22.09	22.49
	8H	20.88	21.87	21.31	22.26	22.66	20.88	21.87	21.31	22.26	22.66
	12H	21.02	21.97	21.45	22.35	22.78	21.02	21.97	21.45	22.35	22.78
4H	2H	18.01	19.13	18.41	19.48	19.87	18.01	19.13	18.41	19.48	19.87
	3H	20.21	21.14	20.62	21.55	21.95	20.21	21.14	20.62	21.55	21.95
	4H	21.09	21.93	21.52	22.35	22.79	21.09	21.93	21.52	22.35	22.79
	6H	21.81	22.54	22.27	22.98	23.45	21.81	22.54	22.27	22.98	23.45
	8H	22.06	22.74	22.52	23.19	23.66	22.06	22.74	22.52	23.19	23.66
	12H	22.24	22.85	22.73	23.33	23.80	22.24	22.85	22.73	23.33	23.80
8H	4H	21.41	22.09	21.88	22.54	23.01	21.41	22.09	21.88	22.54	23.01
	6H	22.27	22.83	22.77	23.32	23.80	22.27	22.83	22.77	23.32	23.80
	8H	22.61	23.11	23.13	23.62	24.11	22.61	23.11	23.13	23.62	24.11
	12H	22.89	23.32	23.40	23.82	24.39	22.89	23.32	23.40	23.82	24.39
12H	4H	21.44	22.05	21.92	22.53	23.00	21.44	22.05	21.92	22.53	23.00
	6H	22.33	22.83	22.85	23.35	23.84	22.33	22.83	22.85	23.35	23.84
	8H	22.73	23.17	23.25	23.67	24.24	22.73	23.17	23.25	23.67	24.24