

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P979750

Luminaire Tested: PRLX-241-935-18L-C-U-S-BLAK-X

Issue Date: 4/3/2025

Test Information

Test Method: LM-79-2019
Report Number: P979750
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2502-353-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 4/3/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-241-935-18L-C-U-S-BLAK-X
Description: 3D PRINTED LUMINAIRE, INTEGRAL LED LIGHT ENGINE, BLACK 241 SHADE WITH CLEAR LENS
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 875.0 lumens
Efficiency: N/A
Efficacy: 79.5 lumens/watt
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.05
Luminous Opening: Circular (Dia: 1.33' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P979750

CATALOG NUMBER: PRLX-241-935-18L-C-U-S-BLAK-X

Luminous Intensity Polar Plot

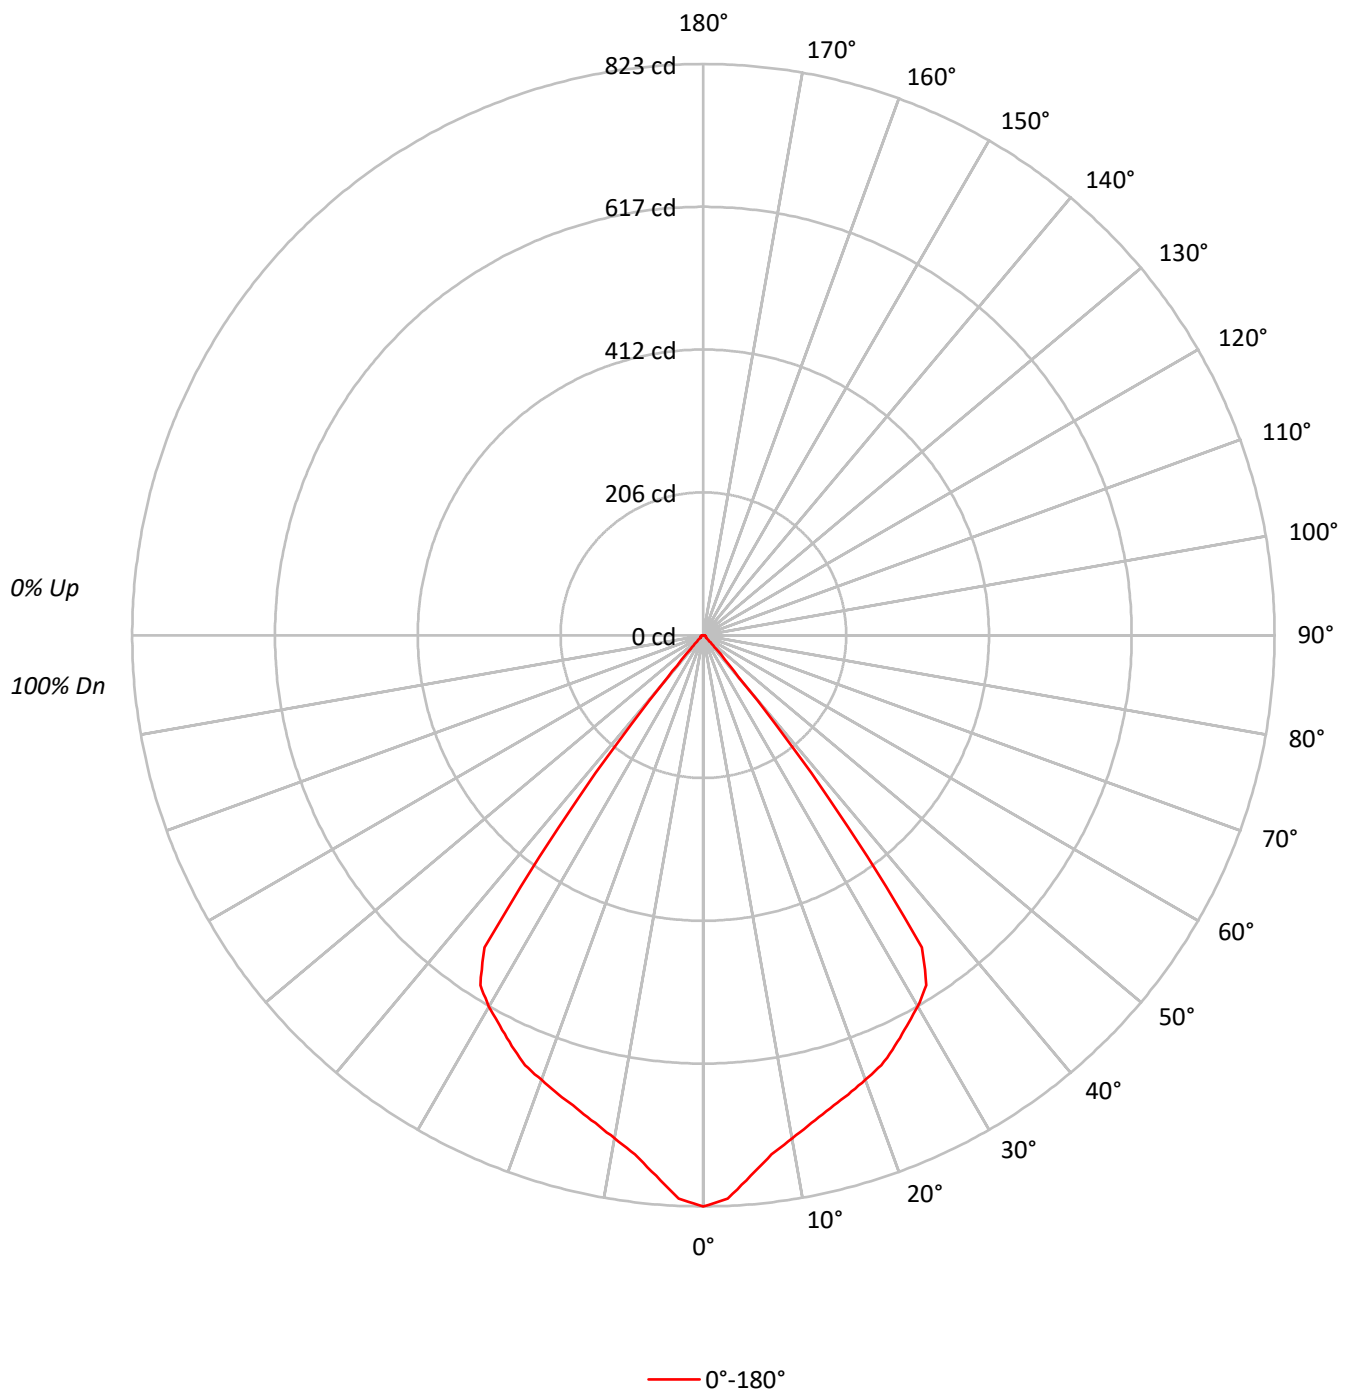



TEST NUMBER: P979750

CATALOG NUMBER: PRLX-241-935-18L-C-U-S-BLAK-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20				
RC	80					70					50					30					10				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10		
RCR																									
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100							
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93							
2	108	103	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86							
3	102	95	90	86	100	94	89	85	91	87	84	89	86	83	87	84	81	80							
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74							
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69							
6	87	77	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64							
7	82	72	66	62	81	72	66	62	70	65	61	69	65	61	68	64	61	59							
8	78	68	62	57	76	67	61	57	66	61	57	65	60	57	64	60	57	55							
9	74	64	58	54	73	63	57	53	62	57	53	61	57	53	61	56	53	51							
10	70	60	54	50	69	60	54	50	59	53	50	58	53	50	57	53	49	48							

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	6345
5°	6051
10°	5762
15°	5631
20°	5594
25°	5555
30°	5498
35°	5169
40°	795
45°	130
50°	61
55°	60
60°	69
65°	73
70°	63
75°	69
80°	49
85°	53

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 130 cd/sqm

TEST NUMBER: P979750

CATALOG NUMBER: PRLX-241-935-18L-C-U-S-BLAK-X

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.2	8.4
10°-20°	199.7	22.8
20°-30°	300.9	34.4
30°-40°	274.4	31.4
40°-50°	16.1	1.8
50°-60°	4.1	0.5
60°-70°	3.7	0.4
70°-80°	2.2	0.2
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	573.7	65.6
0°-40°	848.1	96.9
0°-60°	868.4	99.2
0°-90°	875.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	875.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	823	
5°	782	73
15°	706	200
25°	653	301
35°	549	274
45°	12	16
55°	4	4
65°	4	4
75°	2	2
85°	1	1
90°	0	

TEST NUMBER: P979750

CATALOG NUMBER: PRLX-241-935-18L-C-U-S-BLAK-X

CANDELA DISTRIBUTION (FULL):

	0°
0°	823.1
2.5°	812.3
5°	781.9
7.5°	754.2
10°	736.1
12.5°	719.8
15°	705.6
17.5°	693.8
20°	681.9
22.5°	670.6
25°	653.1
27.5°	634.5
30°	617.6
32.5°	597.8
35°	549.3
37.5°	295.8
40°	79.0
42.5°	26.5
45°	11.9
47.5°	6.2
50°	5.1
52.5°	4.5
55°	4.5
57.5°	4.5
60°	4.5
62.5°	4.0
65°	4.0
67.5°	3.4
70°	2.8
72.5°	2.3
75°	2.3
77.5°	1.7
80°	1.1
82.5°	1.1
85°	0.6
87.5°	0.6
90°	0.0

TEST NUMBER: P979750

CATALOG NUMBER: PRLX-241-935-18L-C-U-S-BLAK-X

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

END OF REPORT