

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P980361

Luminaire Tested: PRLX-243-930-62L-C-U-S-WHTE-X

Issue Date: 4/3/2025

Test Information

Test Method: LM-79-2019
Report Number: P980361
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2502-353-31)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 4/3/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-243-930-62L-C-U-S-WHTE-X
Description: 3D PRINTED LUMINAIRE, INTEGRAL LED LIGHT ENGINE, WHITE 243 SHADE WITH CLEAR LENS
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6241.7 lumens
Efficiency: N/A
Efficacy: 130.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.21 / 1.38
Luminous Opening: Circular (Dia: 1.67' x H: 0')
CIE Type: Direct

Input Watts (W): 48
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P980361

CATALOG NUMBER: PRLX-243-930-62L-C-U-S-WHTE-X

Luminous Intensity Polar Plot

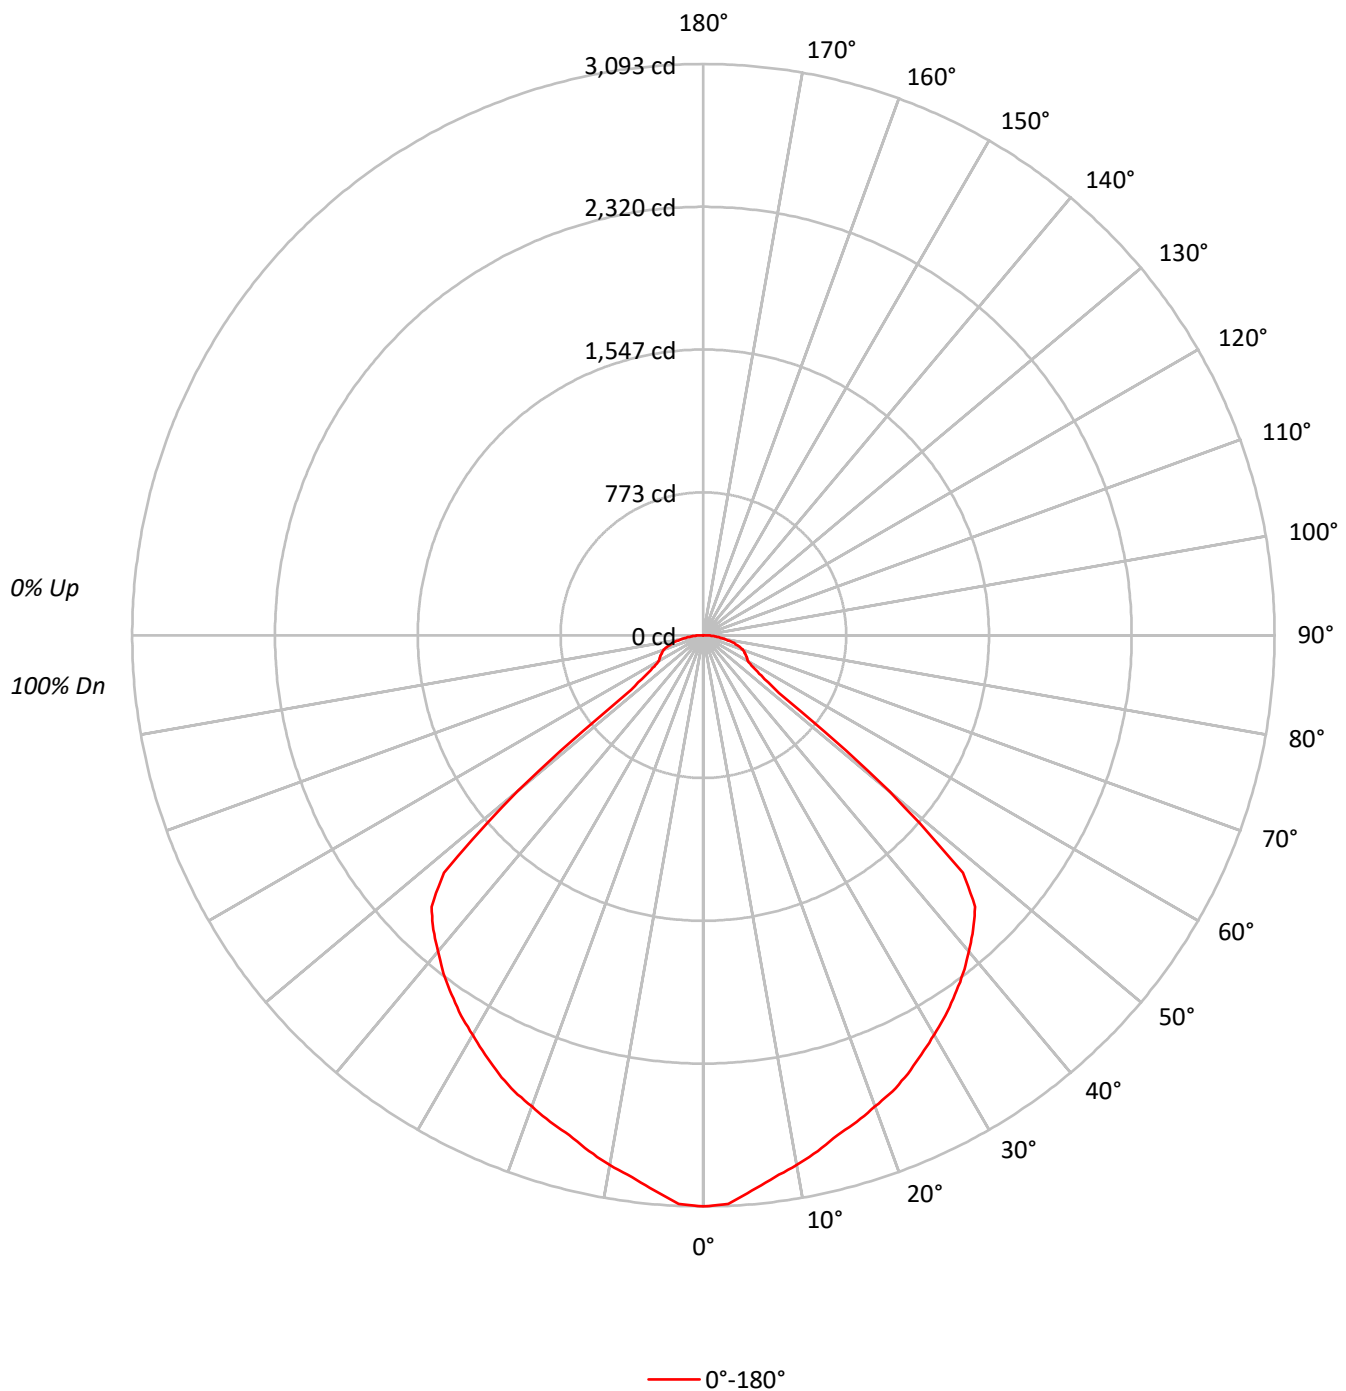

TEST NUMBER: P980361

CATALOG NUMBER: PRLX-243-930-62L-C-U-S-WHTE-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	107	104	100		108	105	102	99		101	98	96		97	95	93		93	92	90
2	103	96	91	86		100	94	89	85		91	87	83		88	84	81		85	82	79
3	95	87	80	74		93	85	79	74		82	77	72		80	75	71		77	73	70
4	88	78	71	65		86	77	70	65		75	68	64		72	67	63		70	66	62
5	82	71	63	57		80	70	63	57		68	61	56		66	60	56		64	59	55
6	76	65	57	51		75	64	56	51		62	55	50		60	55	50		59	54	50
7	71	59	51	46		70	58	51	46		57	50	45		56	49	45		54	49	45
8	67	54	47	41		65	54	46	41		52	46	41		51	45	41		50	45	40
9	62	50	43	37		61	49	42	37		48	42	37		47	41	37		46	41	37
10	59	46	39	34		57	46	39	34		45	38	34		44	38	34		43	38	34

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	15258
5°	14954
10°	14596
15°	14320
20°	14254
25°	14266
30°	14238
35°	14310
40°	14396
45°	14520
50°	10087
55°	3282
60°	2738
65°	2969
70°	3252
75°	3380
80°	3231
85°	3272

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 14520 cd/sqm

TEST NUMBER: P980361

CATALOG NUMBER: PRLX-243-930-62L-C-U-S-WHTE-X

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	284.9	4.6
10°-20°	793.8	12.7
20°-30°	1207.5	19.3
30°-40°	1487.9	23.8
40°-50°	1526.5	24.5
50°-60°	443.5	7.1
60°-70°	250.9	4.0
70°-80°	183.5	2.9
80°-90°	63.2	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2286.2	36.6
0°-40°	3774.1	60.5
0°-60°	5744.1	92.0
0°-90°	6241.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6241.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3093	
5°	3019	285
15°	2804	794
25°	2620	1207
35°	2376	1488
45°	2081	1526
55°	382	444
65°	254	251
75°	177	184
85°	58	63
90°	0	

TEST NUMBER: P980361

CATALOG NUMBER: PRLX-243-930-62L-C-U-S-WHTE-X

CANDELA DISTRIBUTION (FULL):

0°	
0°	3092.6
2.5°	3083.0
5°	3019.4
7.5°	2959.7
10°	2913.4
12.5°	2861.4
15°	2803.6
17.5°	2763.1
20°	2714.9
22.5°	2674.5
25°	2620.5
27.5°	2558.9
30°	2499.1
32.5°	2441.3
35°	2375.8
37.5°	2310.3
40°	2235.2
42.5°	2163.9
45°	2081.0
47.5°	1905.7
50°	1314.1
52.5°	516.4
55°	381.5
57.5°	314.1
60°	277.5
62.5°	265.9
65°	254.3
67.5°	240.9
70°	225.4
72.5°	204.2
75°	177.3
77.5°	144.5
80°	113.7
82.5°	84.8
85°	57.8
87.5°	32.8
90°	0.0

TEST NUMBER: P980361

CATALOG NUMBER: PRLX-243-930-62L-C-U-S-WHTE-X

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.99	13.40	12.36	13.72	14.03	11.99	13.40	12.36	13.72	14.03
	3H	14.41	15.67	14.79	16.00	16.36	14.41	15.67	14.79	16.00	16.36
	4H	15.47	16.64	15.87	16.99	17.37	15.47	16.64	15.87	16.99	17.37
	6H	16.26	17.33	16.67	17.70	18.10	16.26	17.33	16.67	17.70	18.10
	8H	16.53	17.56	16.96	17.95	18.35	16.53	17.56	16.96	17.95	18.35
	12H	16.75	17.73	17.18	18.11	18.54	16.75	17.73	17.18	18.11	18.54
4H	2H	12.74	13.91	13.14	14.26	14.64	12.74	13.91	13.14	14.26	14.64
	3H	15.43	16.39	15.85	16.80	17.20	15.43	16.39	15.85	16.80	17.20
	4H	16.63	17.49	17.06	17.90	18.35	16.63	17.49	17.06	17.90	18.35
	6H	17.54	18.29	18.00	18.73	19.19	17.54	18.29	18.00	18.73	19.19
	8H	17.87	18.57	18.33	19.01	19.48	17.87	18.57	18.33	19.01	19.48
	12H	18.13	18.76	18.62	19.24	19.71	18.13	18.76	18.62	19.24	19.71
8H	4H	17.05	17.75	17.52	18.19	18.66	17.05	17.75	17.52	18.19	18.66
	6H	18.10	18.68	18.60	19.18	19.66	18.10	18.68	18.60	19.18	19.66
	8H	18.53	19.05	19.04	19.56	20.05	18.53	19.05	19.04	19.56	20.05
	12H	18.90	19.36	19.41	19.86	20.42	18.90	19.36	19.41	19.86	20.42
12H	4H	17.10	17.72	17.58	18.20	18.67	17.10	17.72	17.58	18.20	18.67
	6H	18.19	18.71	18.71	19.22	19.71	18.19	18.71	18.71	19.22	19.71
	8H	18.68	19.15	19.19	19.64	20.21	18.68	19.15	19.19	19.64	20.21