

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P980320

Luminaire Tested: PRLX-243-930-LL3-C-U-S-BLAK-X

Issue Date: 4/3/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P980320  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2502-353-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 4/3/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PrentaLux  
Catalog Number: PRLX-243-930-LL3-C-U-S-BLAK-X  
Description: 3D PRINTED LUMINAIRE, INTEGRAL LED LIGHT ENGINE, BLACK 243 SHADE WITH CLEAR LENS  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1759.0 lumens  
Efficiency: N/A  
Efficacy: 117.3 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.34  
Luminous Opening: Circular (Dia: 1.67' x H: 0')  
CIE Type: Direct

Input Watts (W): 15  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P980320  
CATALOG NUMBER: PRLX-243-930-LL3-C-U-S-BLAK-X

### Luminous Intensity Polar Plot

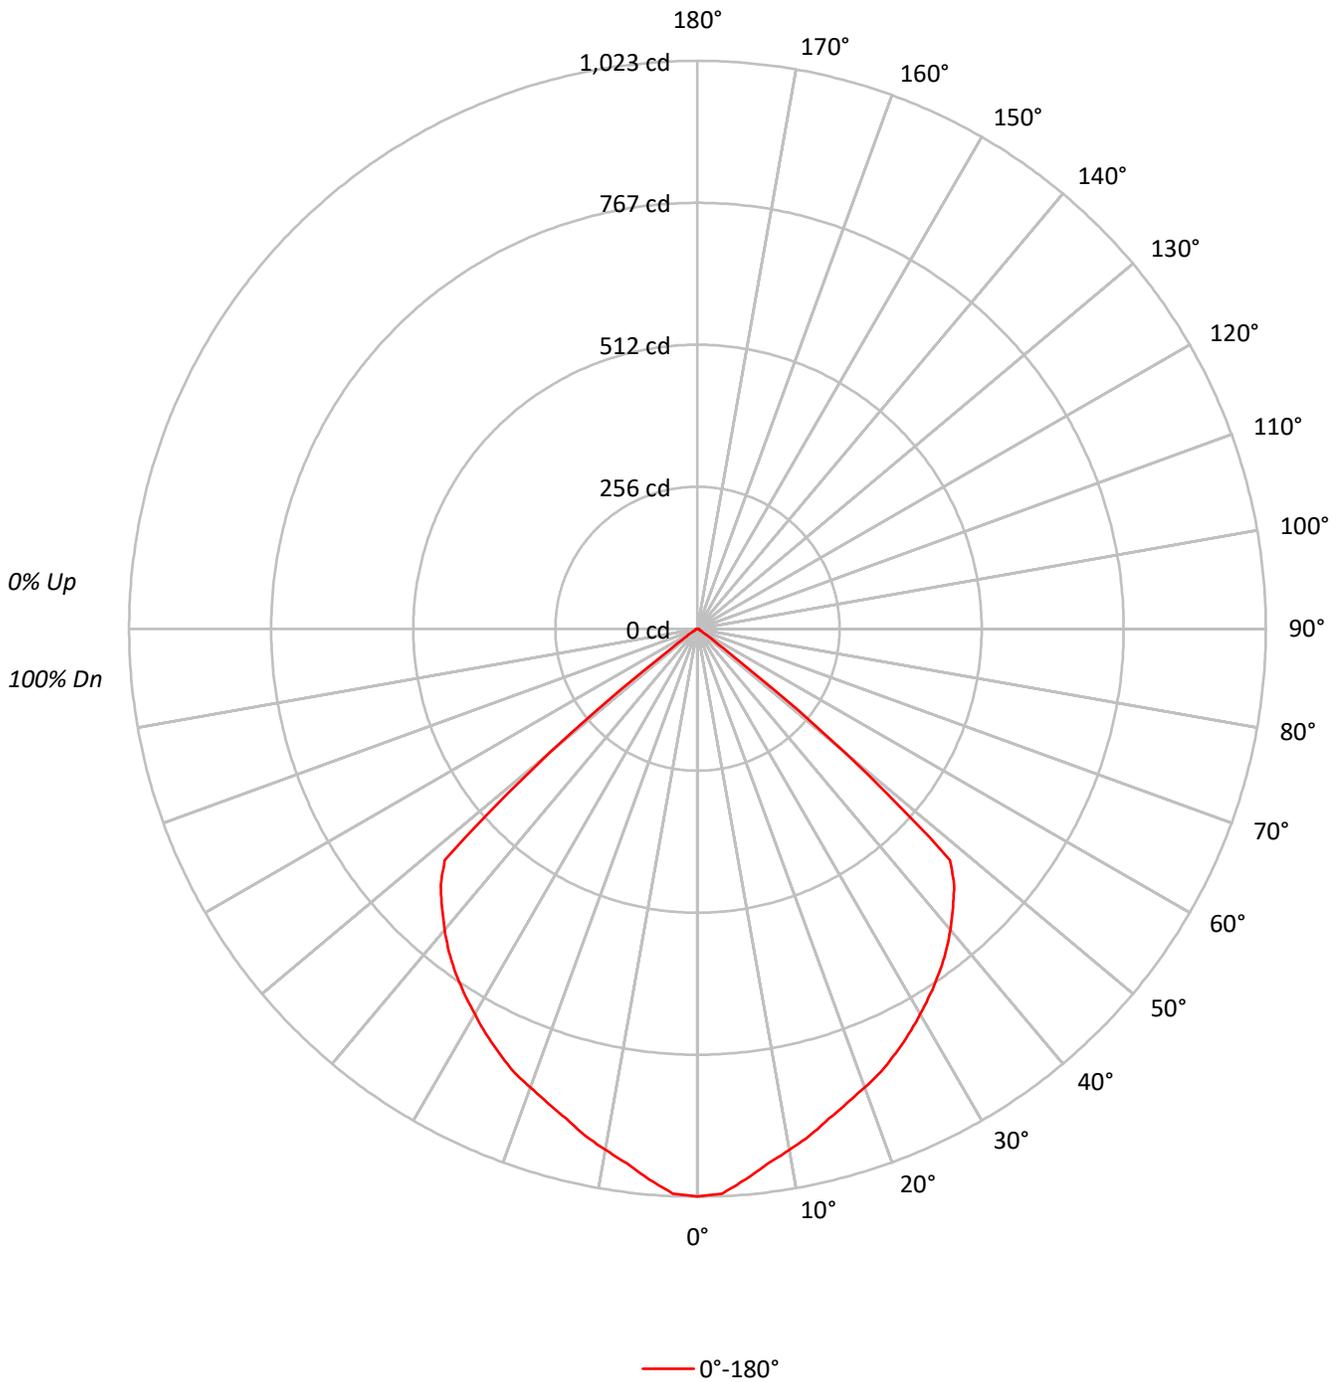

TEST NUMBER: P980320

CATALOG NUMBER: PRLX-243-930-LL3-C-U-S-BLAK-X

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	99	95	91	103	98	93	89	94	91	88	91	88	86	88	86	84	82
3	98	91	85	80	96	89	84	79	86	82	78	84	80	77	82	78	75	74
4	92	83	76	71	90	81	75	70	79	74	69	77	72	69	75	71	68	66
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53
7	75	63	56	51	73	63	56	51	61	55	51	60	54	50	59	54	50	48
8	70	58	51	46	69	58	51	46	57	50	46	55	50	46	54	49	45	44
9	66	54	47	42	64	53	47	42	52	46	42	51	46	42	50	45	41	40
10	62	50	43	38	61	50	43	38	49	43	38	48	42	38	47	42	38	36

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	5045
5°	4929
10°	4774
15°	4667
20°	4616
25°	4595
30°	4567
35°	4565
40°	4559
45°	4558
50°	2642
55°	234
60°	36
65°	42
70°	52
75°	55
80°	40
85°	40

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4558 cd/sqm



TEST NUMBER: P980320

CATALOG NUMBER: PRLX-243-930-LL3-C-U-S-BLAK-X

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	93.6	5.3
10°-20°	258.3	14.7
20°-30°	389.1	22.1
30°-40°	474.3	27.0
40°-50°	476.7	27.1
50°-60°	59.5	3.4
60°-70°	3.6	0.2
70°-80°	3.0	0.2
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	741.0	42.1
0°-40°	1215.3	69.1
0°-60°	1751.5	99.6
0°-90°	1759.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1759.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1023	
5°	995	94
15°	914	258
25°	844	389
35°	758	474
45°	653	477
55°	27	60
65°	4	4
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P980320

CATALOG NUMBER: PRLX-243-930-LL3-C-U-S-BLAK-X

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1022.6
2.5°	1018.3
5°	995.3
7.5°	971.7
10°	953.0
12.5°	935.1
15°	913.6
17.5°	895.6
20°	879.2
22.5°	864.1
25°	844.0
27.5°	823.2
30°	801.7
32.5°	780.2
35°	758.0
37.5°	734.3
40°	707.8
42.5°	680.5
45°	653.3
47.5°	616.7
50°	344.2
52.5°	65.3
55°	27.2
57.5°	8.6
60°	3.6
62.5°	3.6
65°	3.6
67.5°	3.6
70°	3.6
72.5°	3.6
75°	2.9
77.5°	2.2
80°	1.4
82.5°	1.4
85°	0.7
87.5°	0.7
90°	0.0



TEST NUMBER: P980320  
 CATALOG NUMBER: PRLX-243-930-LL3-C-U-S-BLAK-X

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00