

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1244789

Luminaire Tested: PRLX-MIN-L-927-09L-U-NL

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1244789  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2412-299-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PrentaLux  
Catalog Number: PRLX-MIN-L-927-09L-U-NL  
Description: 3D PRINTED PENDANT LED LUMINAIRE, LARGE LIGHT ENGINE, NATURAL LINES SHADE TEXTUF  
LIGHT LEVEL 3  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 790.9 lumens  
Efficiency: N/A  
Efficacy: 35.0 lumens/watt  
Spacing Criteria (0/90/45): 0.2 / 0.2 / 0.18  
Luminous Opening: Rectangular w/ Sides (W: 0.58' x L: 0.58' x H: 1.92')  
CIE Type: General Diffuse  
  
Input Watts (W): 22.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT

TEST NUMBER: P1244789

CATALOG NUMBER: PRLX-MIN-L-927-09L-U-NL

### Luminous Intensity Polar Plot

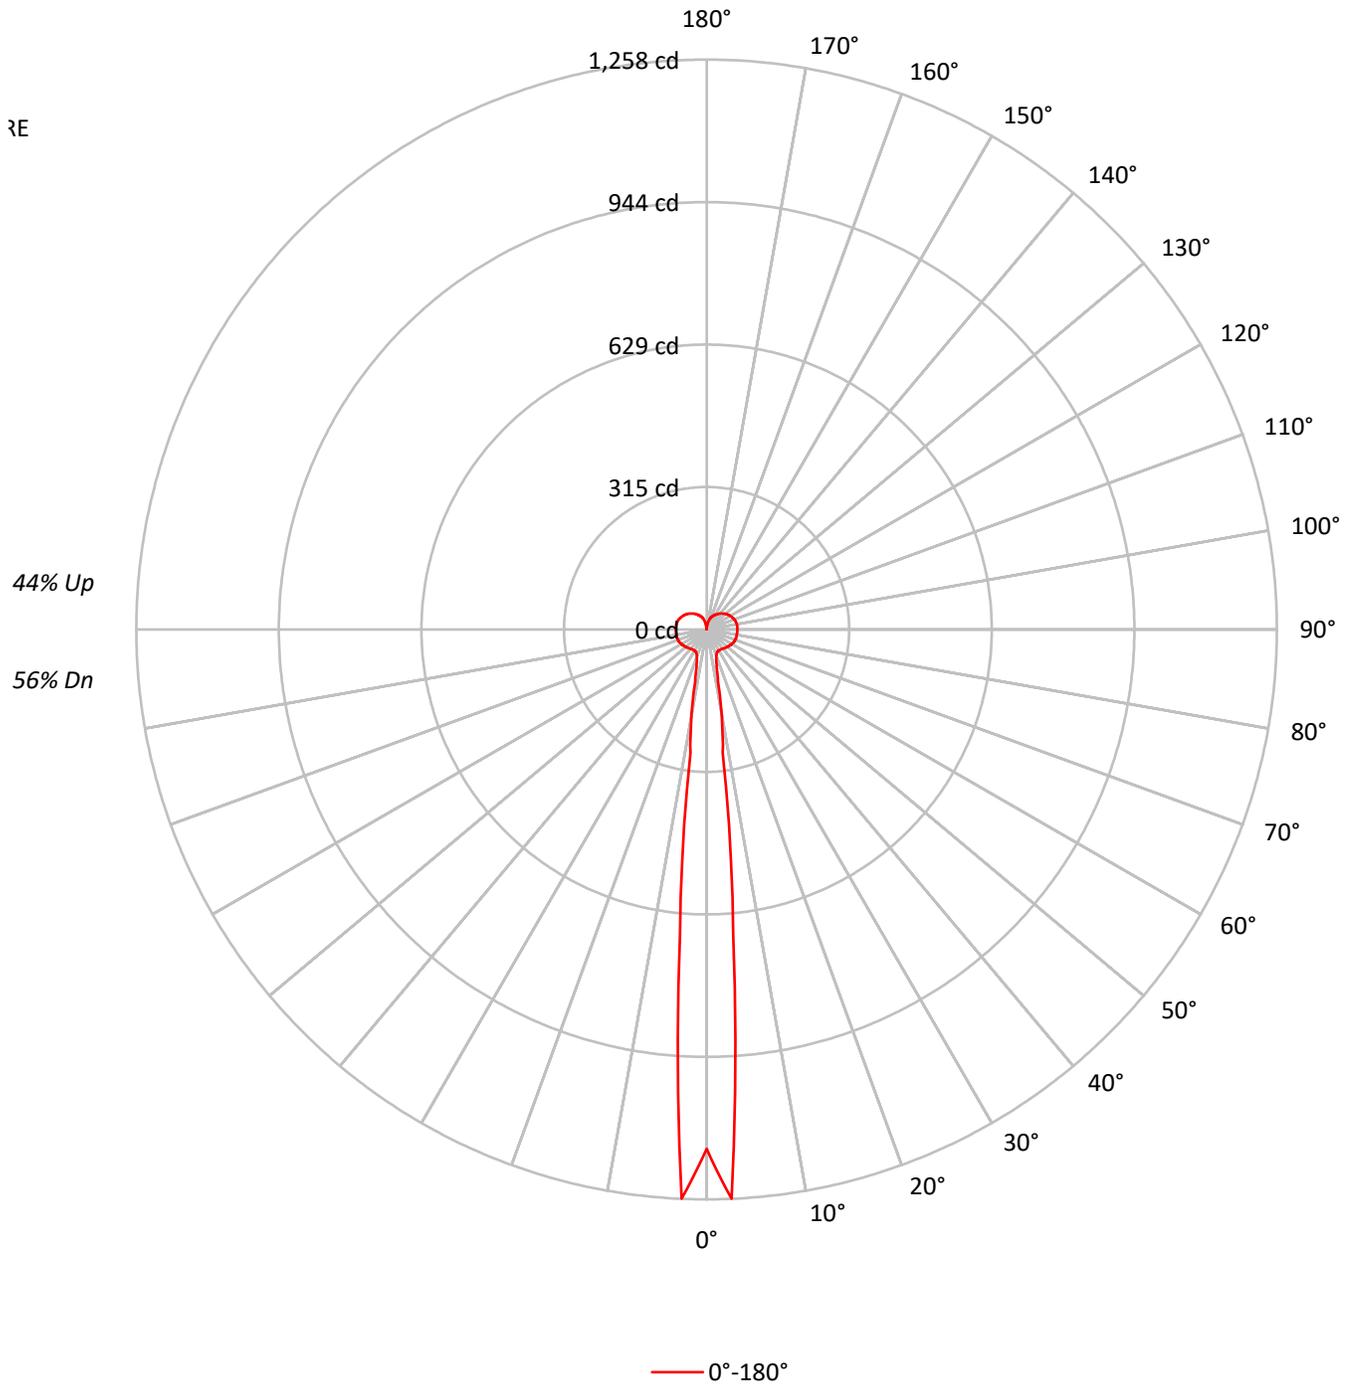



TEST NUMBER: P1244789

CATALOG NUMBER: PRLX-MIN-L-927-09L-U-NL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	109	109	109	109	101	101	101	101	87	87	87		74	74	74		62	62	62	56
1	95	89	83	78	88	82	77	73	70	66	63		59	56	53		48	46	44	39
2	85	76	68	62	79	70	63	58	60	54	50		50	46	42		41	38	35	30
3	77	66	57	50	71	61	53	47	52	46	41		43	39	35		36	32	29	25
4	71	58	49	42	65	54	46	40	46	40	35		39	34	30		32	28	25	21
5	65	52	43	37	60	48	40	34	41	35	30		35	30	26		29	25	22	18
6	60	47	38	32	55	44	36	30	38	31	26		32	27	23		27	22	19	16
7	56	43	34	28	52	40	32	27	35	28	24		29	24	21		25	21	18	15
8	52	39	31	25	48	37	29	24	32	26	21		27	22	19		23	19	16	14
9	49	36	28	23	45	34	27	22	30	24	20		26	21	17		22	18	15	13
10	46	34	26	21	43	32	25	20	28	22	18		24	19	16		21	17	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	36274
5°	16635
10°	3877
15°	1480
20°	957
25°	761
30°	676
35°	632
40°	611
45°	601
50°	597
55°	601
60°	604
65°	613
70°	619
75°	626
80°	626
85°	639

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 90°  
 Luminance: 654 cd/sqm



TEST NUMBER: P1244789

CATALOG NUMBER: PRLX-MIN-L-927-09L-U-NL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	48.4	6.1
10°-20°	26.6	3.4
20°-30°	25.9	3.3
30°-40°	34.0	4.3
40°-50°	44.7	5.6
50°-60°	55.6	7.0
60°-70°	65.3	8.3
70°-80°	71.5	9.0
80°-90°	73.9	9.3
90°-100°	74.0	9.4
100°-110°	70.4	8.9
110°-120°	62.3	7.9
120°-130°	51.3	6.5
130°-140°	38.7	4.9
140°-150°	26.1	3.3
150°-160°	15.3	1.9
160°-170°	6.3	0.8
170°-180°	0.6	0.1
0°-30°	100.9	12.8
0°-40°	135.0	17.1
0°-60°	235.2	29.7
0°-90°	445.9	56.4
90°-120°	206.6	26.1
90°-150°	322.8	40.8
90°-180°	345.0	43.6
0°-180°	790.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1147	
5°	674	48
15°	85	27
25°	55	26
35°	54	34
45°	58	45
55°	62	56
65°	66	65
75°	68	71
85°	68	55
90°	68	37
95°	68	55
105°	67	70
115°	63	62
125°	57	51
135°	50	39
145°	41	26
155°	33	15
165°	22	6
175°	3	1
180°	0	

TEST NUMBER: P1244789

CATALOG NUMBER: PRLX-MIN-L-927-09L-U-NL

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1146.6
2.5°	1257.8
5°	674.4
7.5°	274.4
10°	190.6
12.5°	116.8
15°	85.0
17.5°	70.7
20°	62.4
22.5°	58.0
25°	55.2
27.5°	54.0
30°	53.6
32.5°	53.6
35°	54.0
37.5°	54.4
40°	55.6
42.5°	56.4
45°	57.6
47.5°	58.8
50°	59.6
52.5°	60.8
55°	62.0
57.5°	63.1
60°	63.9
62.5°	65.1
65°	65.9
67.5°	66.7
70°	67.1
72.5°	67.5
75°	67.9
77.5°	67.5
80°	67.5
82.5°	67.5
85°	67.9
87.5°	67.9
90°	67.9
92.5°	67.9
95°	67.9
97.5°	67.9
100°	67.5
102.5°	67.1
105°	66.7
107.5°	65.9
110°	65.1

TEST NUMBER: P1244789

CATALOG NUMBER: PRLX-MIN-L-927-09L-U-NL

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	63.9
115°	62.7
117.5°	61.6
120°	60.0
122.5°	58.8
125°	57.2
127.5°	55.6
130°	53.6
132.5°	52.0
135°	50.0
137.5°	47.7
140°	45.7
142.5°	43.7
145°	41.3
147.5°	39.3
150°	37.3
152.5°	34.9
155°	33.0
157.5°	30.6
160°	28.2
162.5°	25.4
165°	22.2
167.5°	17.9
170°	12.3
172.5°	7.5
175°	3.2
177.5°	0.8
180°	0.4



TEST NUMBER: P1244789

CATALOG NUMBER: PRLX-MIN-L-927-09L-U-NL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.8	6.9	6.7	7.8	9.0	5.8	6.9	6.7	7.8	9.0
	3H	8.8	9.8	9.7	10.7	11.9	8.8	9.8	9.7	10.7	11.9
	4H	10.3	11.2	11.2	12.1	13.3	10.3	11.2	11.2	12.1	13.3
	6H	11.7	12.5	12.6	13.5	14.7	11.7	12.5	12.6	13.5	14.7
	8H	12.3	13.2	13.3	14.1	15.3	12.3	13.2	13.3	14.1	15.3
	12H	13.0	13.8	13.9	14.7	16.0	13.0	13.8	13.9	14.7	16.0
4H	2H	6.6	7.5	7.5	8.5	9.7	6.6	7.5	7.5	8.5	9.7
	3H	9.8	10.6	10.7	11.6	12.8	9.8	10.6	10.7	11.6	12.8
	4H	11.4	12.1	12.3	13.1	14.3	11.4	12.1	12.3	13.1	14.3
	6H	12.9	13.6	13.9	14.6	15.8	12.9	13.6	13.9	14.6	15.8
	8H	13.7	14.3	14.6	15.3	16.5	13.7	14.3	14.6	15.3	16.5
	12H	14.5	15.0	15.4	16.0	17.3	14.5	15.0	15.4	16.0	17.3
8H	4H	11.9	12.5	12.8	13.5	14.7	11.9	12.5	12.8	13.5	14.7
	6H	13.7	14.2	14.6	15.2	16.4	13.7	14.2	14.6	15.2	16.4
	8H	14.6	15.0	15.5	16.0	17.3	14.6	15.0	15.5	16.0	17.3
	12H	15.5	15.9	16.5	16.9	18.2	15.5	15.9	16.5	16.9	18.2
12H	4H	12.0	12.6	13.0	13.6	14.8	12.0	12.6	13.0	13.6	14.8
	6H	13.8	14.3	14.8	15.3	16.6	13.8	14.3	14.8	15.3	16.6
	8H	14.8	15.3	15.8	16.2	17.6	14.8	15.3	15.8	16.2	17.6

(END OF REPORT)