

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1244834

Luminaire Tested: PRLX-MIN-L-935-05L-U-NL

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1244834  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2412-299-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PrentaLux  
Catalog Number: PRLX-MIN-L-935-05L-U-NL  
Description: 3D PRINTED PENDANT LED LUMINAIRE, LARGE LIGHT ENGINE, NATURAL LINES SHADE TEXTUF  
LIGHT LEVEL 2  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 518.1 lumens  
Efficiency: N/A  
Efficacy: 35.0 lumens/watt  
Spacing Criteria (0/90/45): 0.2 / 0.2 / 0.18  
Luminous Opening: Rectangular w/ Sides (W: 0.58' x L: 0.58' x H: 1.92')  
CIE Type: General Diffuse  
  
Input Watts (W): 14.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT

TEST NUMBER: P1244834

CATALOG NUMBER: PRLX-MIN-L-935-05L-U-NL

### Luminous Intensity Polar Plot

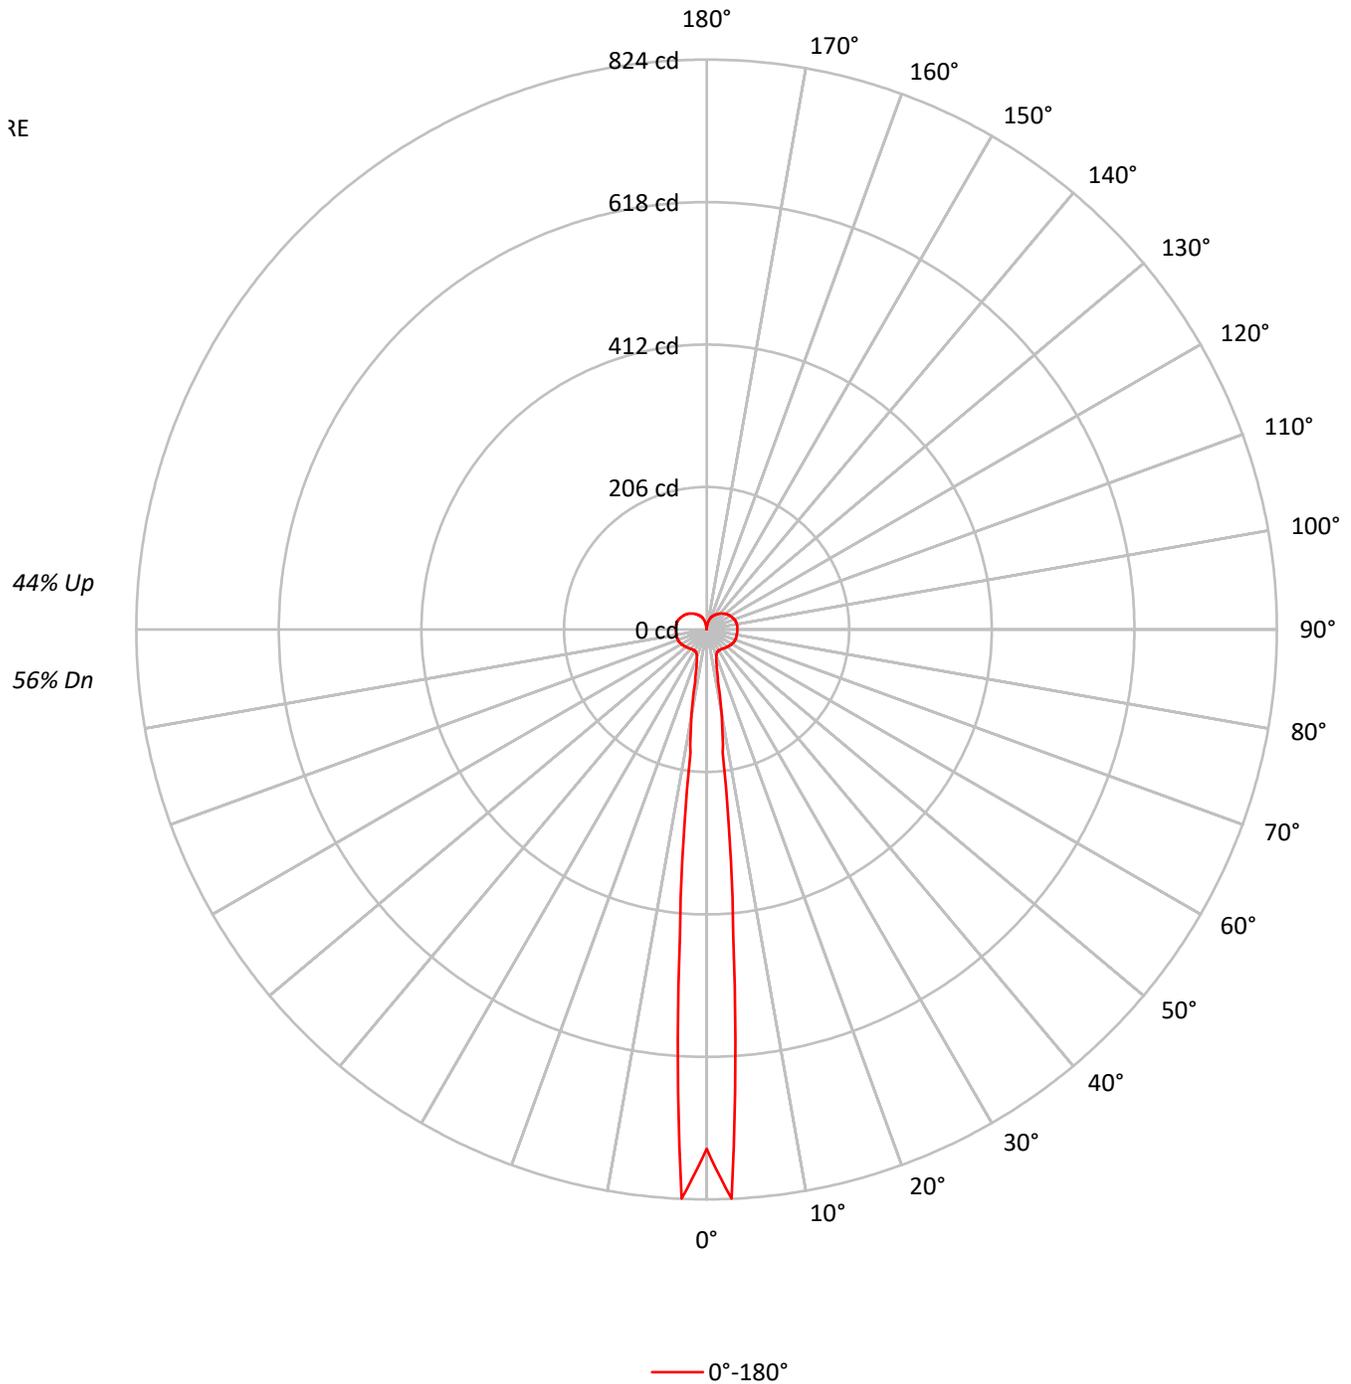



TEST NUMBER: P1244834

CATALOG NUMBER: PRLX-MIN-L-935-05L-U-NL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	109	109	109	109	101	101	101	101	87	87	87		74	74	74		62	62	62	56
1	95	89	83	78	88	82	77	73	70	66	63		59	56	53		48	46	44	39
2	85	76	68	62	79	70	63	58	60	54	50		50	46	42		41	38	35	30
3	77	66	57	50	71	61	53	47	52	46	41		43	39	35		36	32	29	25
4	71	58	49	42	65	54	46	40	46	40	35		39	34	30		32	28	25	21
5	65	52	43	36	60	48	40	34	41	35	30		35	30	26		29	25	22	18
6	60	47	38	32	55	44	36	30	38	31	26		32	27	23		27	22	19	16
7	56	43	34	28	52	40	32	27	35	28	24		29	24	21		25	21	18	15
8	52	39	31	25	48	37	29	24	32	26	21		27	22	19		23	19	16	14
9	49	36	28	23	45	34	27	22	30	24	20		26	21	17		22	18	15	13
10	46	34	26	21	43	32	25	20	28	22	18		24	19	16		21	17	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	23753
5°	10893
10°	2538
15°	970
20°	626
25°	499
30°	443
35°	414
40°	400
45°	394
50°	390
55°	393
60°	396
65°	402
70°	406
75°	410
80°	410
85°	419

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 90°  
 Luminance: 428 cd/sqm



TEST NUMBER: P1244834

CATALOG NUMBER: PRLX-MIN-L-935-05L-U-NL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	31.7	6.1
10°-20°	17.4	3.4
20°-30°	17.0	3.3
30°-40°	22.3	4.3
40°-50°	29.2	5.6
50°-60°	36.4	7.0
60°-70°	42.8	8.3
70°-80°	46.8	9.0
80°-90°	48.4	9.3
90°-100°	48.5	9.4
100°-110°	46.1	8.9
110°-120°	40.8	7.9
120°-130°	33.6	6.5
130°-140°	25.3	4.9
140°-150°	17.1	3.3
150°-160°	10.0	1.9
160°-170°	4.1	0.8
170°-180°	0.4	0.1
0°-30°	66.1	12.8
0°-40°	88.4	17.1
0°-60°	154.0	29.7
0°-90°	292.1	56.4
90°-120°	135.4	26.1
90°-150°	211.5	40.8
90°-180°	226.0	43.6
0°-180°	518.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	751	
5°	442	32
15°	56	17
25°	36	17
35°	35	22
45°	38	29
55°	41	36
65°	43	43
75°	44	47
85°	44	36
90°	44	24
95°	44	36
105°	44	46
115°	41	41
125°	38	34
135°	33	25
145°	27	17
155°	22	10
165°	15	4
175°	2	0
180°	0	

TEST NUMBER: P1244834

CATALOG NUMBER: PRLX-MIN-L-935-05L-U-NL

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	750.8
2.5°	823.7
5°	441.6
7.5°	179.7
10°	124.8
12.5°	76.5
15°	55.7
17.5°	46.3
20°	40.8
22.5°	38.0
25°	36.2
27.5°	35.4
30°	35.1
32.5°	35.1
35°	35.4
37.5°	35.6
40°	36.4
42.5°	36.9
45°	37.7
47.5°	38.5
50°	39.0
52.5°	39.8
55°	40.6
57.5°	41.4
60°	41.9
62.5°	42.7
65°	43.2
67.5°	43.7
70°	44.0
72.5°	44.2
75°	44.5
77.5°	44.2
80°	44.2
82.5°	44.2
85°	44.5
87.5°	44.5
90°	44.5
92.5°	44.5
95°	44.5
97.5°	44.5
100°	44.2
102.5°	44.0
105°	43.7
107.5°	43.2
110°	42.7

TEST NUMBER: P1244834

CATALOG NUMBER: PRLX-MIN-L-935-05L-U-NL

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	41.9
115°	41.1
117.5°	40.3
120°	39.3
122.5°	38.5
125°	37.5
127.5°	36.4
130°	35.1
132.5°	34.1
135°	32.8
137.5°	31.2
140°	29.9
142.5°	28.6
145°	27.0
147.5°	25.7
150°	24.4
152.5°	22.9
155°	21.6
157.5°	20.0
160°	18.5
162.5°	16.6
165°	14.6
167.5°	11.7
170°	8.1
172.5°	4.9
175°	2.1
177.5°	0.5
180°	0.3



TEST NUMBER: P1244834

CATALOG NUMBER: PRLX-MIN-L-935-05L-U-NL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.4	5.4	5.3	6.3	7.5	4.4	5.4	5.3	6.3	7.5
	3H	7.4	8.3	8.3	9.3	10.5	7.4	8.3	8.3	9.3	10.5
	4H	8.8	9.7	9.7	10.7	11.9	8.8	9.7	9.7	10.7	11.9
	6H	10.2	11.1	11.1	12.0	13.2	10.2	11.1	11.1	12.0	13.2
	8H	10.9	11.7	11.8	12.6	13.9	10.9	11.7	11.8	12.6	13.9
	12H	11.5	12.3	12.5	13.3	14.5	11.5	12.3	12.5	13.3	14.5
4H	2H	5.2	6.1	6.1	7.0	8.2	5.2	6.1	6.1	7.0	8.2
	3H	8.3	9.1	9.2	10.1	11.3	8.3	9.1	9.2	10.1	11.3
	4H	9.9	10.7	10.8	11.6	12.8	9.9	10.7	10.8	11.6	12.8
	6H	11.5	12.1	12.4	13.1	14.3	11.5	12.1	12.4	13.1	14.3
	8H	12.2	12.9	13.2	13.8	15.1	12.2	12.9	13.2	13.8	15.1
	12H	13.0	13.6	13.9	14.5	15.8	13.0	13.6	13.9	14.5	15.8
8H	4H	10.4	11.1	11.4	12.0	13.3	10.4	11.1	11.4	12.0	13.3
	6H	12.2	12.7	13.1	13.7	15.0	12.2	12.7	13.1	13.7	15.0
	8H	13.1	13.6	14.1	14.6	15.8	13.1	13.6	14.1	14.6	15.8
	12H	14.0	14.5	15.0	15.5	16.8	14.0	14.5	15.0	15.5	16.8
12H	4H	10.5	11.1	11.5	12.1	13.3	10.5	11.1	11.5	12.1	13.3
	6H	12.4	12.9	13.3	13.8	15.1	12.4	12.9	13.3	13.8	15.1
	8H	13.3	13.8	14.3	14.8	16.1	13.3	13.8	14.3	14.8	16.1

(END OF REPORT)