

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1245145

Luminaire Tested: PRLX-NIM-M-927-07L-U-NR

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245145
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2412-299-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-NIM-M-927-07L-U-NR
Description: 3D PRINTED PENDANT LED LUMINAIRE, MEDIUM LIGHT ENGINE, NATURAL RIBS SHADE TEXTL
LIGHT LEVEL 5
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 680.2 lumens
Efficiency: N/A
Efficacy: 23.5 lumens/watt
Spacing Criteria (0/90/45): 0.2 / 0.2 / 0.18
Luminous Opening: Rectangular w/ Sides (W: 0.46' x L: 0.46' x H: 1.92')
CIE Type: General Diffuse

Input Watts (W): 28.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

TEST NUMBER: P1245145

CATALOG NUMBER: PRLX-NIM-M-927-07L-U-NR

Luminous Intensity Polar Plot

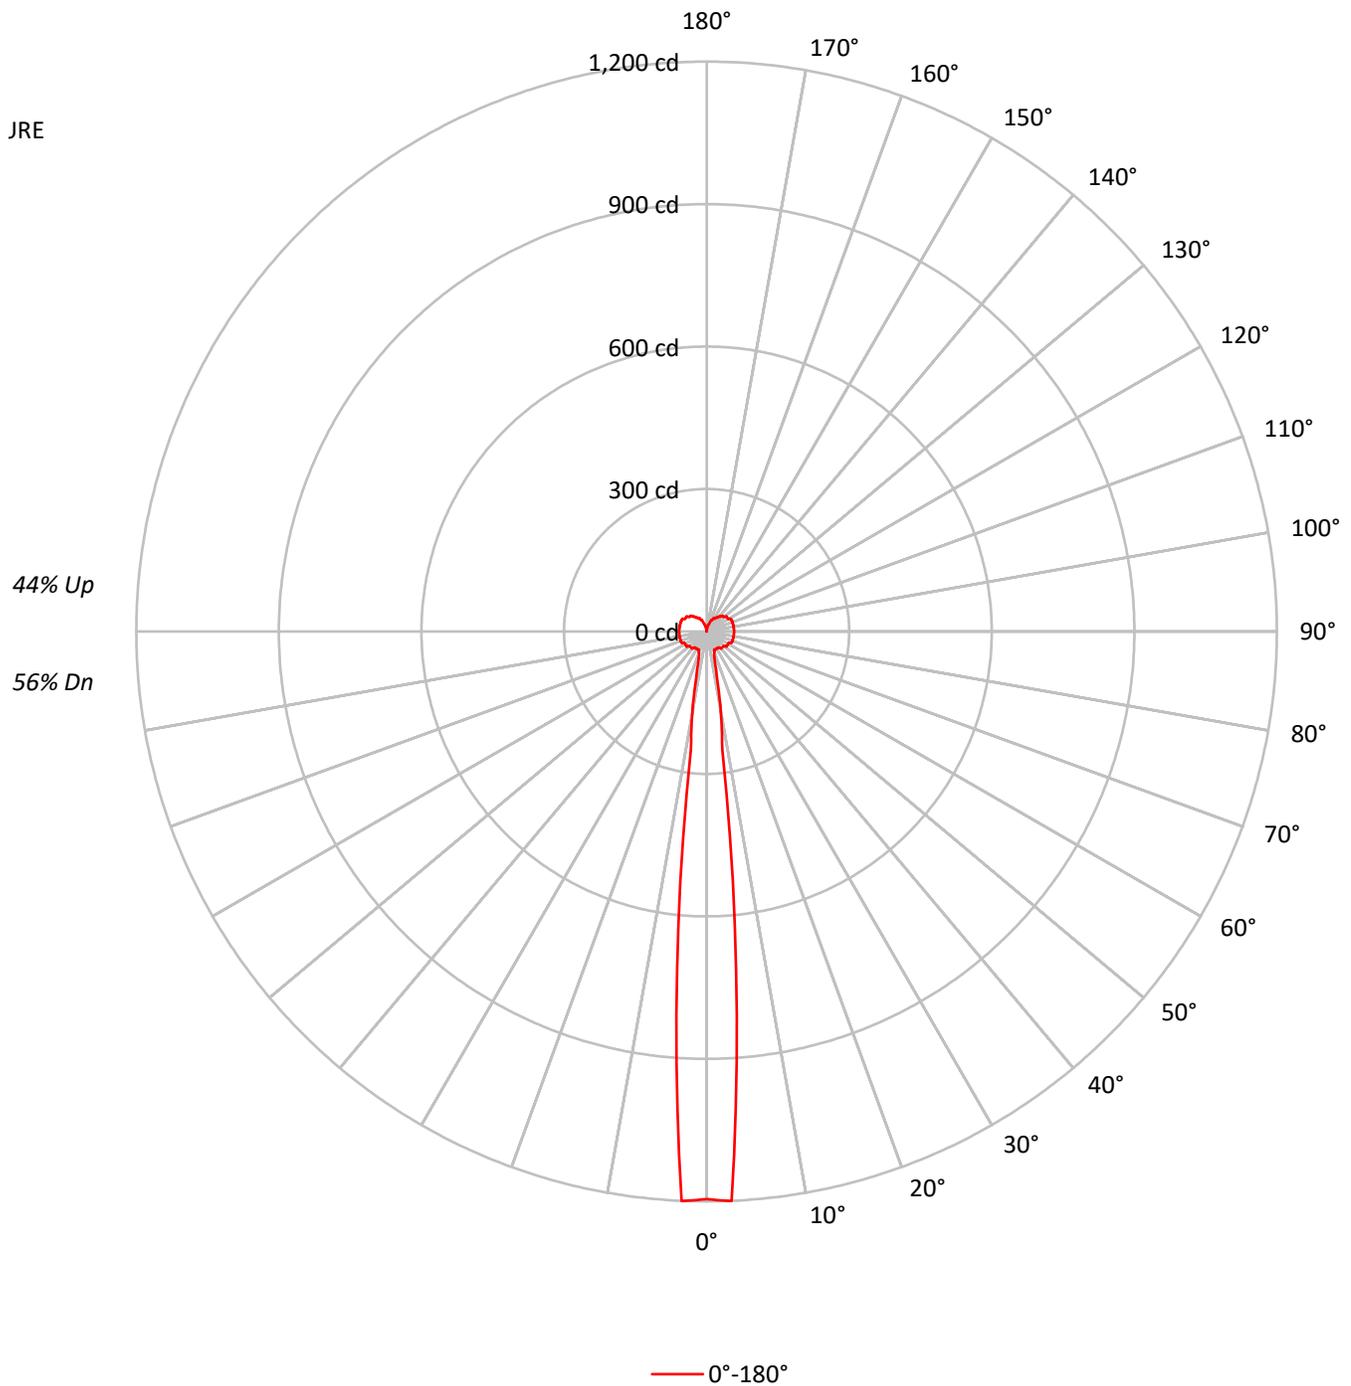



TEST NUMBER: P1245145

CATALOG NUMBER: PRLX-NIM-M-927-07L-U-NR

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	108	108	108	108	101	101	101	101	86	86	86		73	73	73		61	61	61	56
1	95	89	83	78	88	82	77	73	70	66	63		58	55	53		48	46	44	38
2	85	76	68	62	78	70	63	58	60	54	50		50	46	42		40	37	35	30
3	77	66	58	51	71	61	54	47	52	46	41		43	39	35		35	32	29	25
4	71	59	50	43	65	54	46	40	46	40	35		39	34	30		32	28	25	21
5	65	52	43	37	60	49	41	35	42	35	30		35	30	26		29	25	22	18
6	60	47	39	32	56	44	36	30	38	31	27		32	27	23		27	23	20	17
7	56	43	35	29	52	40	33	27	35	29	24		30	25	21		25	21	18	15
8	53	40	32	26	49	37	30	25	32	26	22		28	23	19		23	19	16	14
9	49	37	29	24	46	34	27	22	30	24	20		26	21	18		22	18	15	13
10	47	34	27	22	43	32	25	21	28	22	19		24	20	17		21	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	61251
5°	26850
10°	5182
15°	1704
20°	1021
25°	803
30°	726
35°	667
40°	700
45°	660
50°	629
55°	671
60°	651
65°	702
70°	692
75°	688
80°	689
85°	695

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 90°
 Luminance: 707 cd/sqm



TEST NUMBER: P1245145

CATALOG NUMBER: PRLX-NIM-M-927-07L-U-NR

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.6	7.0
10°-20°	21.8	3.2
20°-30°	19.7	2.9
30°-40°	26.8	3.9
40°-50°	36.6	5.4
50°-60°	46.5	6.8
60°-70°	55.3	8.1
70°-80°	61.0	9.0
80°-90°	63.0	9.3
90°-100°	63.0	9.3
100°-110°	61.0	9.0
110°-120°	56.6	8.3
120°-130°	46.5	6.8
130°-140°	35.1	5.2
140°-150°	22.4	3.3
150°-160°	12.9	1.9
160°-170°	4.2	0.6
170°-180°	0.4	0.1
0°-30°	89.0	13.1
0°-40°	115.8	17.0
0°-60°	198.8	29.2
0°-90°	378.1	55.6
90°-120°	180.6	26.6
90°-150°	284.5	41.8
90°-180°	302.0	44.4
0°-180°	680.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1195	
5°	713	48
15°	68	22
25°	42	20
35°	42	27
45°	47	37
55°	52	46
65°	58	55
75°	58	61
85°	58	47
90°	58	32
95°	58	47
105°	58	61
115°	58	57
125°	52	46
135°	47	35
145°	37	22
155°	26	13
165°	16	4
175°	0	0
180°	0	

TEST NUMBER: P1245145

CATALOG NUMBER: PRLX-NIM-M-927-07L-U-NR

CANDELA DISTRIBUTION (FULL):

0°	
0°	1195.2
2.5°	1200.4
5°	712.9
7.5°	251.6
10°	173.0
12.5°	99.6
15°	68.1
17.5°	52.4
20°	47.2
22.5°	41.9
25°	41.9
27.5°	41.9
30°	41.9
32.5°	41.9
35°	41.9
37.5°	41.9
40°	47.2
42.5°	47.2
45°	47.2
47.5°	47.2
50°	47.2
52.5°	52.4
55°	52.4
57.5°	52.4
60°	52.4
62.5°	52.4
65°	57.7
67.5°	57.7
70°	57.7
72.5°	57.7
75°	57.7
77.5°	57.7
80°	57.7
82.5°	57.7
85°	57.7
87.5°	57.7
90°	57.7
92.5°	57.7
95°	57.7
97.5°	57.7
100°	57.7
102.5°	57.7
105°	57.7
107.5°	57.7
110°	57.7



TEST NUMBER: P1245145

CATALOG NUMBER: PRLX-NIM-M-927-07L-U-NR

CANDELA DISTRIBUTION (continued):

	0°
112.5°	57.7
115°	57.7
117.5°	57.7
120°	52.4
122.5°	52.4
125°	52.4
127.5°	52.4
130°	47.2
132.5°	47.2
135°	47.2
137.5°	41.9
140°	41.9
142.5°	36.7
145°	36.7
147.5°	31.5
150°	31.5
152.5°	31.5
155°	26.2
157.5°	26.2
160°	21.0
162.5°	15.7
165°	15.7
167.5°	10.5
170°	10.5
172.5°	5.2
175°	0.0
177.5°	0.0
180°	0.0



TEST NUMBER: P1245145

CATALOG NUMBER: PRLX-NIM-M-927-07L-U-NR

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.0	7.0	6.9	7.9	9.1	6.0	7.0	6.9	7.9	9.1
	3H	9.1	10.1	10.0	11.0	12.2	9.1	10.1	10.0	11.0	12.2
	4H	10.6	11.5	11.5	12.4	13.6	10.6	11.5	11.5	12.4	13.6
	6H	12.0	12.8	12.9	13.8	15.0	12.0	12.8	12.9	13.8	15.0
	8H	12.6	13.4	13.6	14.4	15.6	12.6	13.4	13.6	14.4	15.6
	12H	13.3	14.1	14.2	15.0	16.3	13.3	14.1	14.2	15.0	16.3
4H	2H	6.9	7.8	7.8	8.7	9.9	6.9	7.8	7.8	8.7	9.9
	3H	10.1	10.9	11.0	11.9	13.1	10.1	10.9	11.0	11.9	13.1
	4H	11.7	12.4	12.6	13.4	14.6	11.7	12.4	12.6	13.4	14.6
	6H	13.2	13.9	14.2	14.9	16.1	13.2	13.9	14.2	14.9	16.1
	8H	14.0	14.6	14.9	15.6	16.8	14.0	14.6	14.9	15.6	16.8
	12H	14.7	15.3	15.7	16.3	17.6	14.7	15.3	15.7	16.3	17.6
8H	4H	12.2	12.8	13.1	13.8	15.0	12.2	12.8	13.1	13.8	15.0
	6H	13.9	14.5	14.9	15.5	16.7	13.9	14.5	14.9	15.5	16.7
	8H	14.8	15.3	15.8	16.3	17.6	14.8	15.3	15.8	16.3	17.6
	12H	15.8	16.2	16.8	17.2	18.5	15.8	16.2	16.8	17.2	18.5
12H	4H	12.3	12.9	13.3	13.9	15.1	12.3	12.9	13.3	13.9	15.1
	6H	14.1	14.6	15.1	15.6	16.9	14.1	14.6	15.1	15.6	16.9
	8H	15.1	15.5	16.1	16.5	17.9	15.1	15.5	16.1	16.5	17.9

(END OF REPORT)