

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1245033

Luminaire Tested: PRLX-NIM-L-930-02L-U-NR

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245033
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2412-299-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-NIM-L-930-02L-U-NR
Description: 3D PRINTED PENDANT LED LUMINAIRE, LARGE LIGHT ENGINE, NATURAL RIBS SHADE TEXTURE
LIGHT LEVEL 1
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 244.1 lumens
Efficiency: N/A
Efficacy: 43.6 lumens/watt
Spacing Criteria (0/90/45): 0.19 / 0.19 / 0.18
Luminous Opening: Rectangular w/ Sides (W: 0.58' x L: 0.58' x H: 1.92')
CIE Type: General Diffuse

Input Watts (W): 5.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

TEST NUMBER: P1245033

CATALOG NUMBER: PRLX-NIM-L-930-02L-U-NR

Luminous Intensity Polar Plot

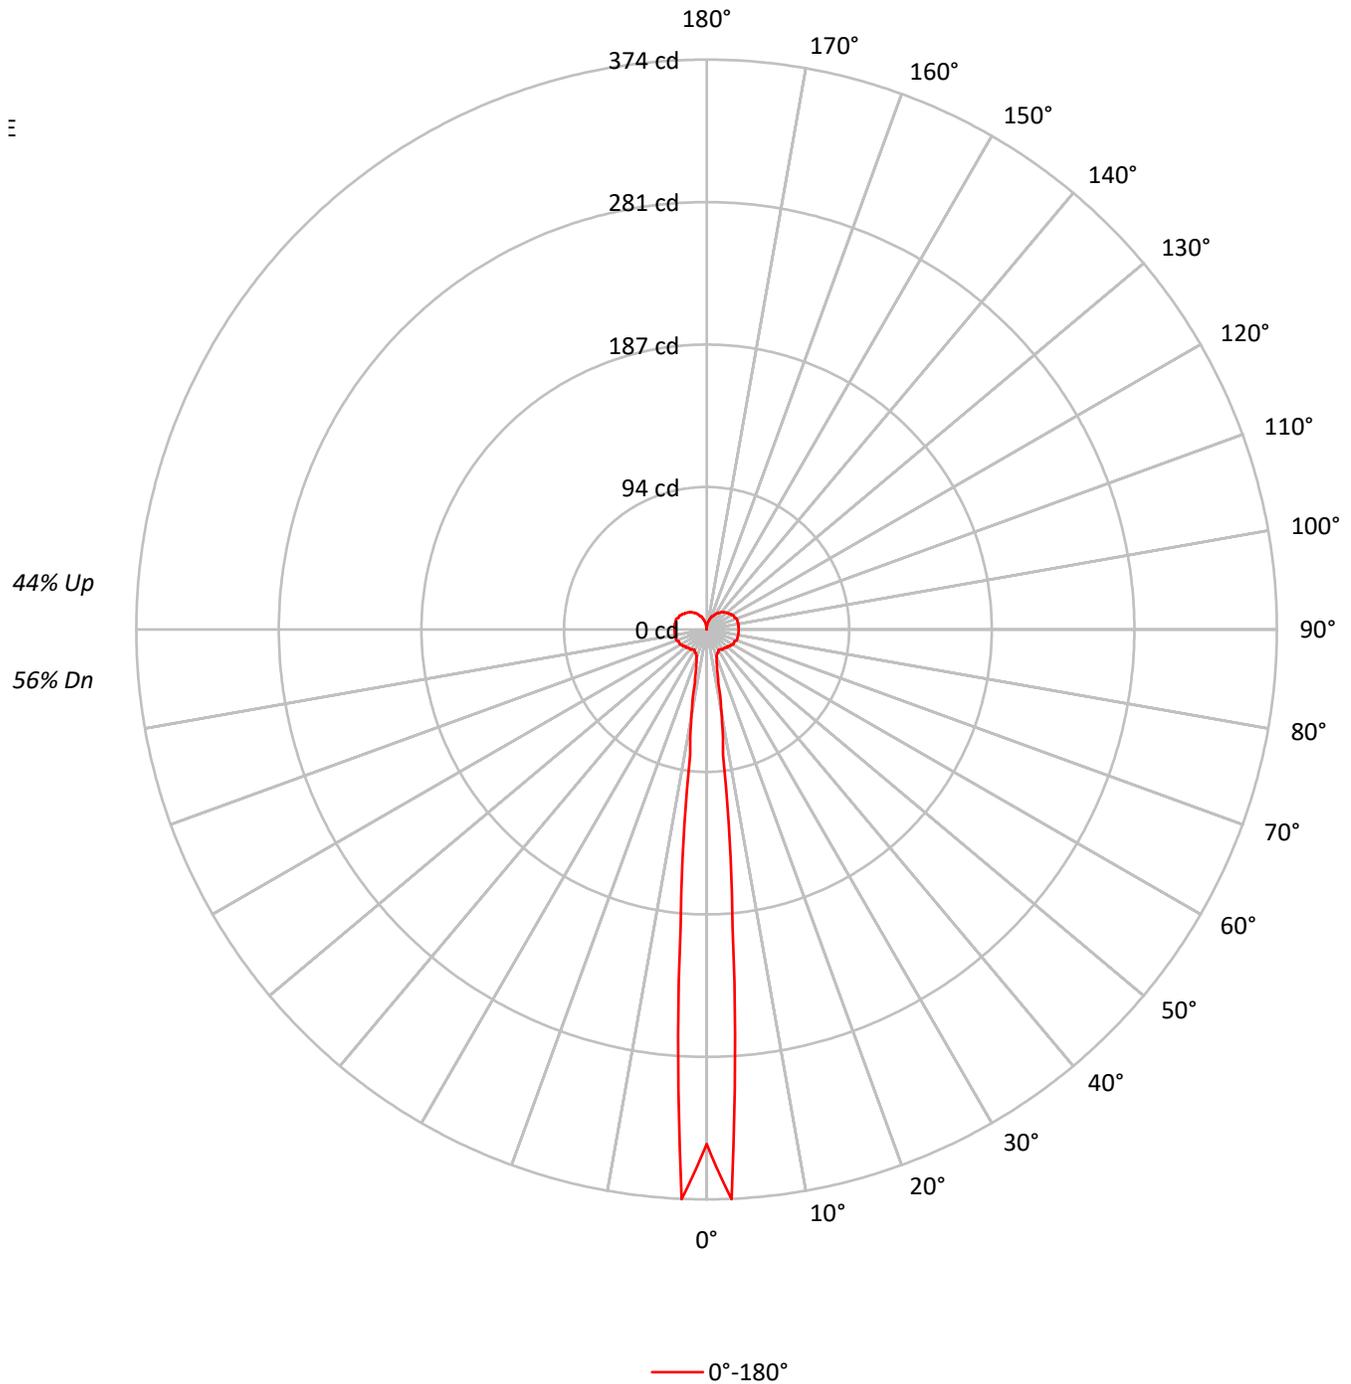



TEST NUMBER: P1245033

CATALOG NUMBER: PRLX-NIM-L-930-02L-U-NR

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	108	108	108	108	101	101	101	101	86	86	86		73	73	73		61	61	61	56
1	95	89	83	78	87	82	77	73	70	66	62		58	55	53		48	45	43	38
2	85	76	68	61	78	70	63	57	59	54	49		49	45	42		40	37	34	30
3	77	66	57	50	71	61	53	47	52	45	40		43	38	34		35	31	28	24
4	71	58	49	42	65	54	46	40	46	39	34		38	33	29		31	27	24	20
5	65	52	43	36	60	48	40	34	41	35	30		34	29	25		28	24	21	18
6	60	47	38	32	55	44	36	30	37	31	26		31	26	22		26	22	19	16
7	56	43	34	28	51	40	32	27	34	28	23		29	24	20		24	20	17	15
8	52	39	31	25	48	36	29	24	32	25	21		27	22	18		23	19	16	13
9	49	36	28	23	45	34	27	22	29	23	19		25	20	17		21	17	15	12
10	46	33	26	21	43	31	25	20	27	22	18		24	19	16		20	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	10680
5°	4837
10°	1151
15°	456
20°	290
25°	232
30°	198
35°	184
40°	185
45°	175
50°	178
55°	183
60°	188
65°	185
70°	194
75°	194
80°	195
85°	198

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 90°
 Luminance: 202 cd/sqm



TEST NUMBER: P1245033

CATALOG NUMBER: PRLX-NIM-L-930-02L-U-NR

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	14.3	5.9
10°-20°	8.1	3.3
20°-30°	7.9	3.2
30°-40°	10.1	4.2
40°-50°	13.3	5.5
50°-60°	16.7	6.8
60°-70°	19.9	8.2
70°-80°	22.2	9.1
80°-90°	22.9	9.4
90°-100°	22.9	9.4
100°-110°	22.2	9.1
110°-120°	19.8	8.1
120°-130°	16.2	6.7
130°-140°	12.4	5.1
140°-150°	8.3	3.4
150°-160°	4.6	1.9
160°-170°	1.8	0.8
170°-180°	0.2	0.1
0°-30°	30.4	12.4
0°-40°	40.5	16.6
0°-60°	70.5	28.9
0°-90°	135.5	55.5
90°-120°	64.9	26.6
90°-150°	101.9	41.7
90°-180°	109.0	44.7
0°-180°	244.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	338	
5°	196	14
15°	26	8
25°	17	8
35°	16	10
45°	17	13
55°	19	17
65°	20	20
75°	21	22
85°	21	17
90°	21	12
95°	21	17
105°	21	22
115°	20	20
125°	18	16
135°	16	12
145°	14	8
155°	9	5
165°	6	2
175°	1	0
180°	0	

TEST NUMBER: P1245033

CATALOG NUMBER: PRLX-NIM-L-930-02L-U-NR

CANDELA DISTRIBUTION (FULL):

0°	
0°	337.6
2.5°	374.3
5°	196.1
7.5°	82.8
10°	56.6
12.5°	35.6
15°	26.2
17.5°	22.0
20°	18.9
22.5°	17.8
25°	16.8
27.5°	16.8
30°	15.7
32.5°	15.7
35°	15.7
37.5°	16.8
40°	16.8
42.5°	16.8
45°	16.8
47.5°	17.8
50°	17.8
52.5°	17.8
55°	18.9
57.5°	18.9
60°	19.9
62.5°	19.9
65°	19.9
67.5°	19.9
70°	21.0
72.5°	21.0
75°	21.0
77.5°	21.0
80°	21.0
82.5°	21.0
85°	21.0
87.5°	21.0
90°	21.0
92.5°	21.0
95°	21.0
97.5°	21.0
100°	21.0
102.5°	21.0
105°	21.0
107.5°	21.0
110°	21.0

TEST NUMBER: P1245033

CATALOG NUMBER: PRLX-NIM-L-930-02L-U-NR

CANDELA DISTRIBUTION (continued):

	0°
112.5°	19.9
115°	19.9
117.5°	19.9
120°	18.9
122.5°	18.9
125°	17.8
127.5°	17.8
130°	16.8
132.5°	16.8
135°	15.7
137.5°	15.7
140°	14.7
142.5°	13.6
145°	13.6
147.5°	12.6
150°	11.5
152.5°	10.5
155°	9.4
157.5°	9.4
160°	8.4
162.5°	7.3
165°	6.3
167.5°	5.2
170°	4.2
172.5°	3.1
175°	1.0
177.5°	0.0
180°	0.0



TEST NUMBER: P1245033

CATALOG NUMBER: PRLX-NIM-L-930-02L-U-NR

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	1.6	2.6	2.4	3.5	4.7	1.6	2.6	2.4	3.5	4.7
	3H	4.6	5.6	5.5	6.5	7.7	4.6	5.6	5.5	6.5	7.7
	4H	6.1	7.0	7.0	8.0	9.2	6.1	7.0	7.0	8.0	9.2
	6H	7.5	8.4	8.5	9.3	10.6	7.5	8.4	8.5	9.3	10.6
	8H	8.2	9.0	9.2	10.0	11.2	8.2	9.0	9.2	10.0	11.2
	12H	8.9	9.7	9.8	10.6	11.9	8.9	9.7	9.8	10.6	11.9
4H	2H	2.3	3.3	3.3	4.2	5.4	2.3	3.3	3.3	4.2	5.4
	3H	5.6	6.4	6.5	7.4	8.6	5.6	6.4	6.5	7.4	8.6
	4H	7.2	8.0	8.2	8.9	10.2	7.2	8.0	8.2	8.9	10.2
	6H	8.8	9.5	9.8	10.5	11.7	8.8	9.5	9.8	10.5	11.7
	8H	9.6	10.2	10.5	11.2	12.5	9.6	10.2	10.5	11.2	12.5
	12H	10.4	10.9	11.3	11.9	13.2	10.4	10.9	11.3	11.9	13.2
8H	4H	7.8	8.4	8.7	9.4	10.6	7.8	8.4	8.7	9.4	10.6
	6H	9.5	10.1	10.5	11.1	12.4	9.5	10.1	10.5	11.1	12.4
	8H	10.5	11.0	11.4	12.0	13.2	10.5	11.0	11.4	12.0	13.2
	12H	11.4	11.8	12.4	12.8	14.2	11.4	11.8	12.4	12.8	14.2
12H	4H	7.9	8.4	8.8	9.4	10.7	7.9	8.4	8.8	9.4	10.7
	6H	9.7	10.2	10.7	11.2	12.5	9.7	10.2	10.7	11.2	12.5
	8H	10.7	11.2	11.7	12.2	13.5	10.7	11.2	11.7	12.2	13.5

(END OF REPORT)