

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1245173

Luminaire Tested: PRLX-NIM-M-935-03L-U-NR

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245173
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2412-299-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-NIM-M-935-03L-U-NR
Description: 3D PRINTED PENDANT LED LUMINAIRE, MEDIUM LIGHT ENGINE, NATURAL RIBS SHADE TEXTURE
LIGHT LEVEL 2
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 318.7 lumens
Efficiency: N/A
Efficacy: 28.7 lumens/watt
Spacing Criteria (0/90/45): 0.2 / 0.2 / 0.18
Luminous Opening: Rectangular w/ Sides (W: 0.46' x L: 0.46' x H: 1.92')
CIE Type: General Diffuse

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

TEST NUMBER: P1245173

CATALOG NUMBER: PRLX-NIM-M-935-03L-U-NR

Luminous Intensity Polar Plot

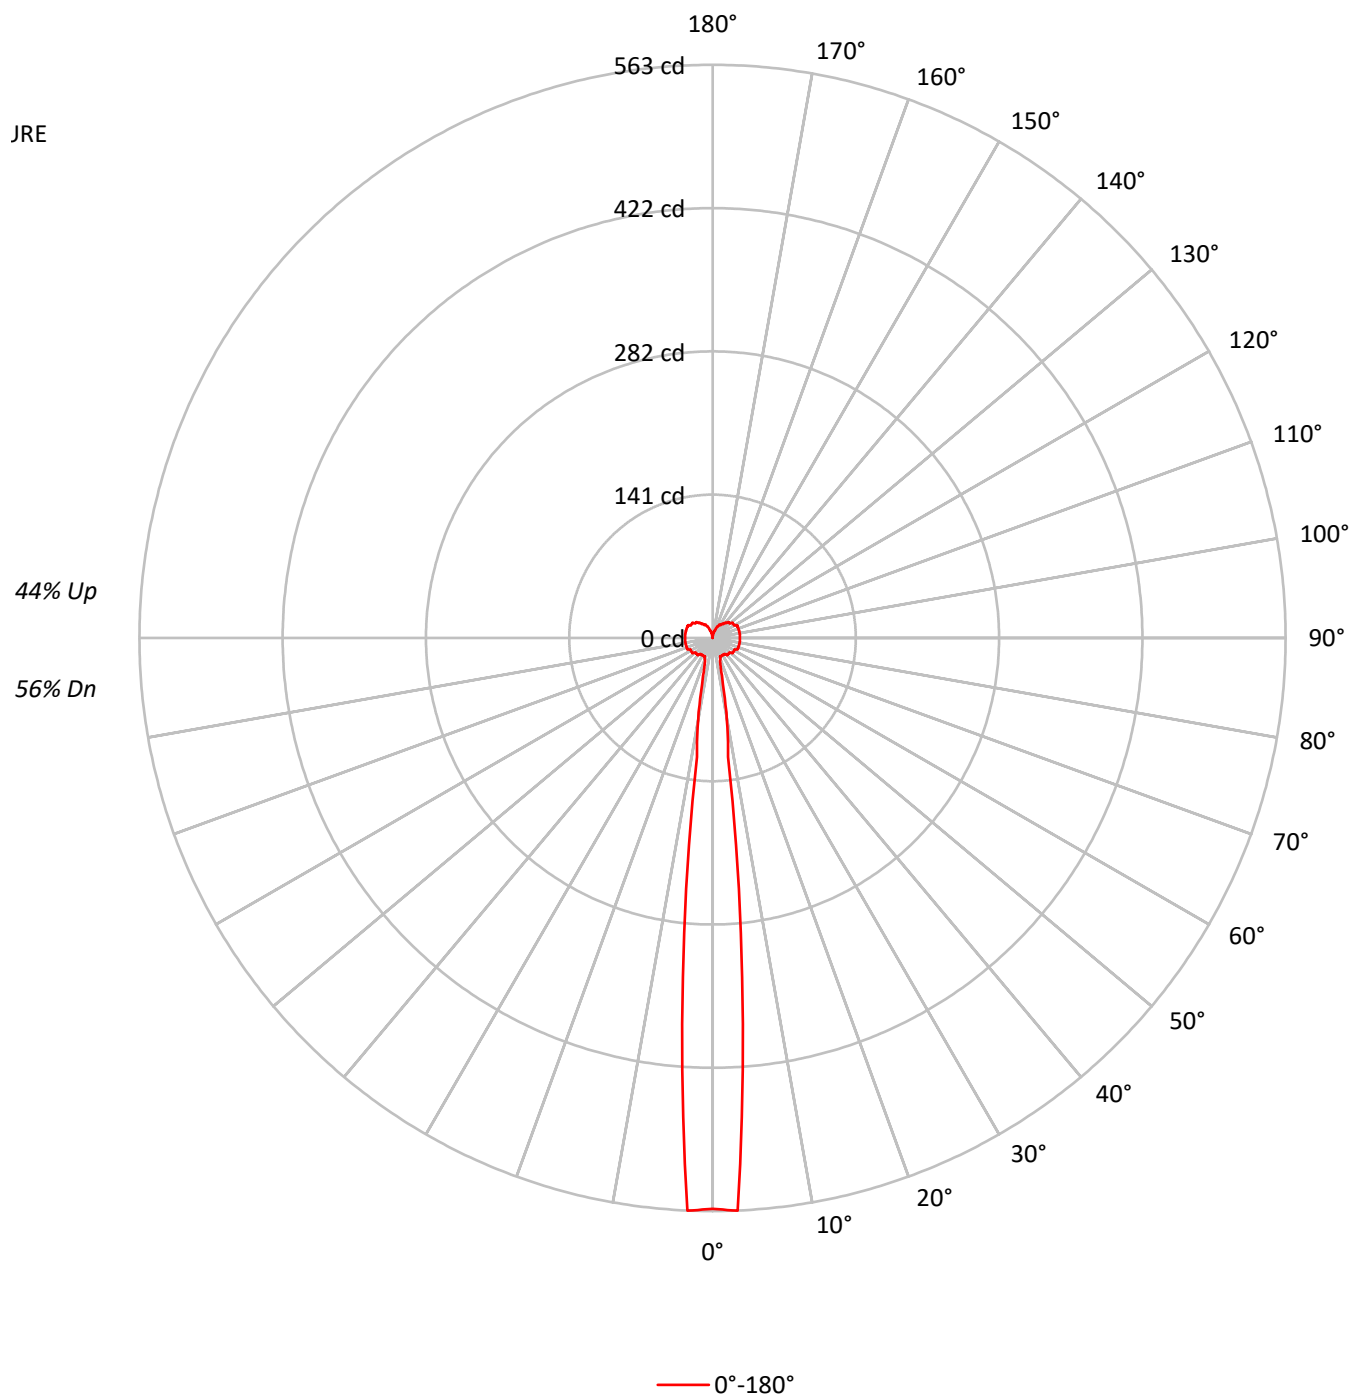



TEST NUMBER: P1245173

CATALOG NUMBER: PRLX-NIM-M-935-03L-U-NR

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	56		
1	95	89	83	78	88	82	77	73	70	66	63	58	55	53	48	46	44	38		
2	85	76	68	62	78	70	63	58	60	54	50	50	46	42	40	37	35	30		
3	77	66	58	51	71	61	54	47	52	46	41	43	39	35	35	32	29	25		
4	71	59	50	43	65	54	46	40	46	40	35	39	34	30	32	28	25	21		
5	65	52	43	37	60	49	41	35	42	35	30	35	30	26	29	25	22	18		
6	60	47	39	32	56	44	36	30	38	32	27	32	27	23	27	23	20	17		
7	56	43	35	29	52	40	33	27	35	29	24	30	25	21	25	21	18	15		
8	53	40	32	26	49	37	30	25	32	26	22	28	23	19	23	19	17	14		
9	49	37	29	24	46	34	27	22	30	24	20	26	21	18	22	18	15	13		
10	47	34	27	22	43	32	25	21	28	22	19	24	20	17	21	17	15	13		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	28734
5°	12594
10°	2429
15°	801
20°	478
25°	378
30°	341
35°	314
40°	328
45°	309
50°	294
55°	315
60°	306
65°	328
70°	324
75°	322
80°	322
85°	325

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 90°

Luminance: 331 cd/sqm

TEST NUMBER: P1245173

CATALOG NUMBER: PRLX-NIM-M-935-03L-U-NR

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	22.3	7.0
10°-20°	10.2	3.2
20°-30°	9.2	2.9
30°-40°	12.6	3.9
40°-50°	17.1	5.4
50°-60°	21.8	6.8
60°-70°	25.9	8.1
70°-80°	28.6	9.0
80°-90°	29.5	9.2
90°-100°	29.5	9.2
100°-110°	28.6	9.0
110°-120°	26.5	8.3
120°-130°	21.8	6.8
130°-140°	16.5	5.2
140°-150°	10.5	3.3
150°-160°	6.1	1.9
160°-170°	2.0	0.6
170°-180°	0.2	0.1
0°-30°	41.8	13.1
0°-40°	54.3	17.0
0°-60°	93.3	29.3
0°-90°	177.2	55.6
90°-120°	84.5	26.5
90°-150°	133.3	41.8
90°-180°	142.0	44.6
0°-180°	318.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	561	
5°	334	22
15°	32	10
25°	20	9
35°	20	13
45°	22	17
55°	25	22
65°	27	26
75°	27	29
85°	27	22
90°	27	15
95°	27	22
105°	27	29
115°	27	27
125°	25	22
135°	22	16
145°	17	10
155°	12	6
165°	7	2
175°	0	0
180°	0	

TEST NUMBER: P1245173

CATALOG NUMBER: PRLX-NIM-M-935-03L-U-NR

CANDELA DISTRIBUTION (FULL):

0°	
0°	560.7
2.5°	563.1
5°	334.4
7.5°	118.0
10°	81.1
12.5°	46.7
15°	32.0
17.5°	24.6
20°	22.1
22.5°	19.7
25°	19.7
27.5°	19.7
30°	19.7
32.5°	19.7
35°	19.7
37.5°	19.7
40°	22.1
42.5°	22.1
45°	22.1
47.5°	22.1
50°	22.1
52.5°	24.6
55°	24.6
57.5°	24.6
60°	24.6
62.5°	24.6
65°	27.0
67.5°	27.0
70°	27.0
72.5°	27.0
75°	27.0
77.5°	27.0
80°	27.0
82.5°	27.0
85°	27.0
87.5°	27.0
90°	27.0
92.5°	27.0
95°	27.0
97.5°	27.0
100°	27.0
102.5°	27.0
105°	27.0
107.5°	27.0
110°	27.0

TEST NUMBER: P1245173

CATALOG NUMBER: PRLX-NIM-M-935-03L-U-NR

CANDELA DISTRIBUTION (continued):

	0°
112.5°	27.0
115°	27.0
117.5°	27.0
120°	24.6
122.5°	24.6
125°	24.6
127.5°	24.6
130°	22.1
132.5°	22.1
135°	22.1
137.5°	19.7
140°	19.7
142.5°	17.2
145°	17.2
147.5°	14.8
150°	14.8
152.5°	14.8
155°	12.3
157.5°	12.3
160°	9.8
162.5°	7.4
165°	7.4
167.5°	4.9
170°	4.9
172.5°	2.5
175°	0.0
177.5°	0.0
180°	0.0

TEST NUMBER: P1245173

CATALOG NUMBER: PRLX-NIM-M-935-03L-U-NR

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	3.4	4.4	4.3	5.3	6.5	3.4	4.4	4.3	5.3	6.5
	3H	6.5	7.5	7.4	8.4	9.6	6.5	7.5	7.4	8.4	9.6
	4H	7.9	8.8	8.8	9.8	11.0	7.9	8.8	8.8	9.8	11.0
	6H	9.3	10.2	10.3	11.1	12.3	9.3	10.2	10.3	11.1	12.3
	8H	10.0	10.8	10.9	11.8	13.0	10.0	10.8	10.9	11.8	13.0
	12H	10.6	11.4	11.6	12.4	13.6	10.6	11.4	11.6	12.4	13.6
4H	2H	4.2	5.1	5.1	6.1	7.3	4.2	5.1	5.1	6.1	7.3
	3H	7.5	8.3	8.4	9.2	10.5	7.5	8.3	8.4	9.2	10.5
	4H	9.0	9.8	10.0	10.7	12.0	9.0	9.8	10.0	10.7	12.0
	6H	10.6	11.2	11.5	12.2	13.5	10.6	11.2	11.5	12.2	13.5
	8H	11.4	12.0	12.3	12.9	14.2	11.4	12.0	12.3	12.9	14.2
	12H	12.1	12.7	13.1	13.7	14.9	12.1	12.7	13.1	13.7	14.9
8H	4H	9.5	10.2	10.5	11.1	12.4	9.5	10.2	10.5	11.1	12.4
	6H	11.3	11.8	12.3	12.8	14.1	11.3	11.8	12.3	12.8	14.1
	8H	12.2	12.7	13.2	13.7	15.0	12.2	12.7	13.2	13.7	15.0
	12H	13.1	13.6	14.1	14.6	15.9	13.1	13.6	14.1	14.6	15.9
12H	4H	9.7	10.2	10.6	11.2	12.5	9.7	10.2	10.6	11.2	12.5
	6H	11.5	12.0	12.5	13.0	14.3	11.5	12.0	12.5	13.0	14.3
	8H	12.5	12.9	13.4	13.9	15.2	12.5	12.9	13.4	13.9	15.2

(END OF REPORT)