

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1245443

Luminaire Tested: PRLX-UNA-S-927-02L-U-NL

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245443
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2412-299-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UNA-S-927-02L-U-NL
Description: 3D PRINTED PENDANT LED LUMINAIRE, SMALL LIGHT ENGINE, NATURAL LINES SHADE TEXTURE, LIGHT LEVEL 1
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 195.0 lumens
Efficiency: N/A
Efficacy: 31.0 lumens/watt
Spacing Criteria (0/90/45): 0.33 / 0.33 / 0.34
Luminous Opening: Rectangular w/ Sides (W: 0.47' x L: 0.47' x H: 1.12')
CIE Type: Semi-Direct

Input Watts (W): 6.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

TEST NUMBER: P1245443

CATALOG NUMBER: PRLX-UNA-S-927-02L-U-NL

Luminous Intensity Polar Plot

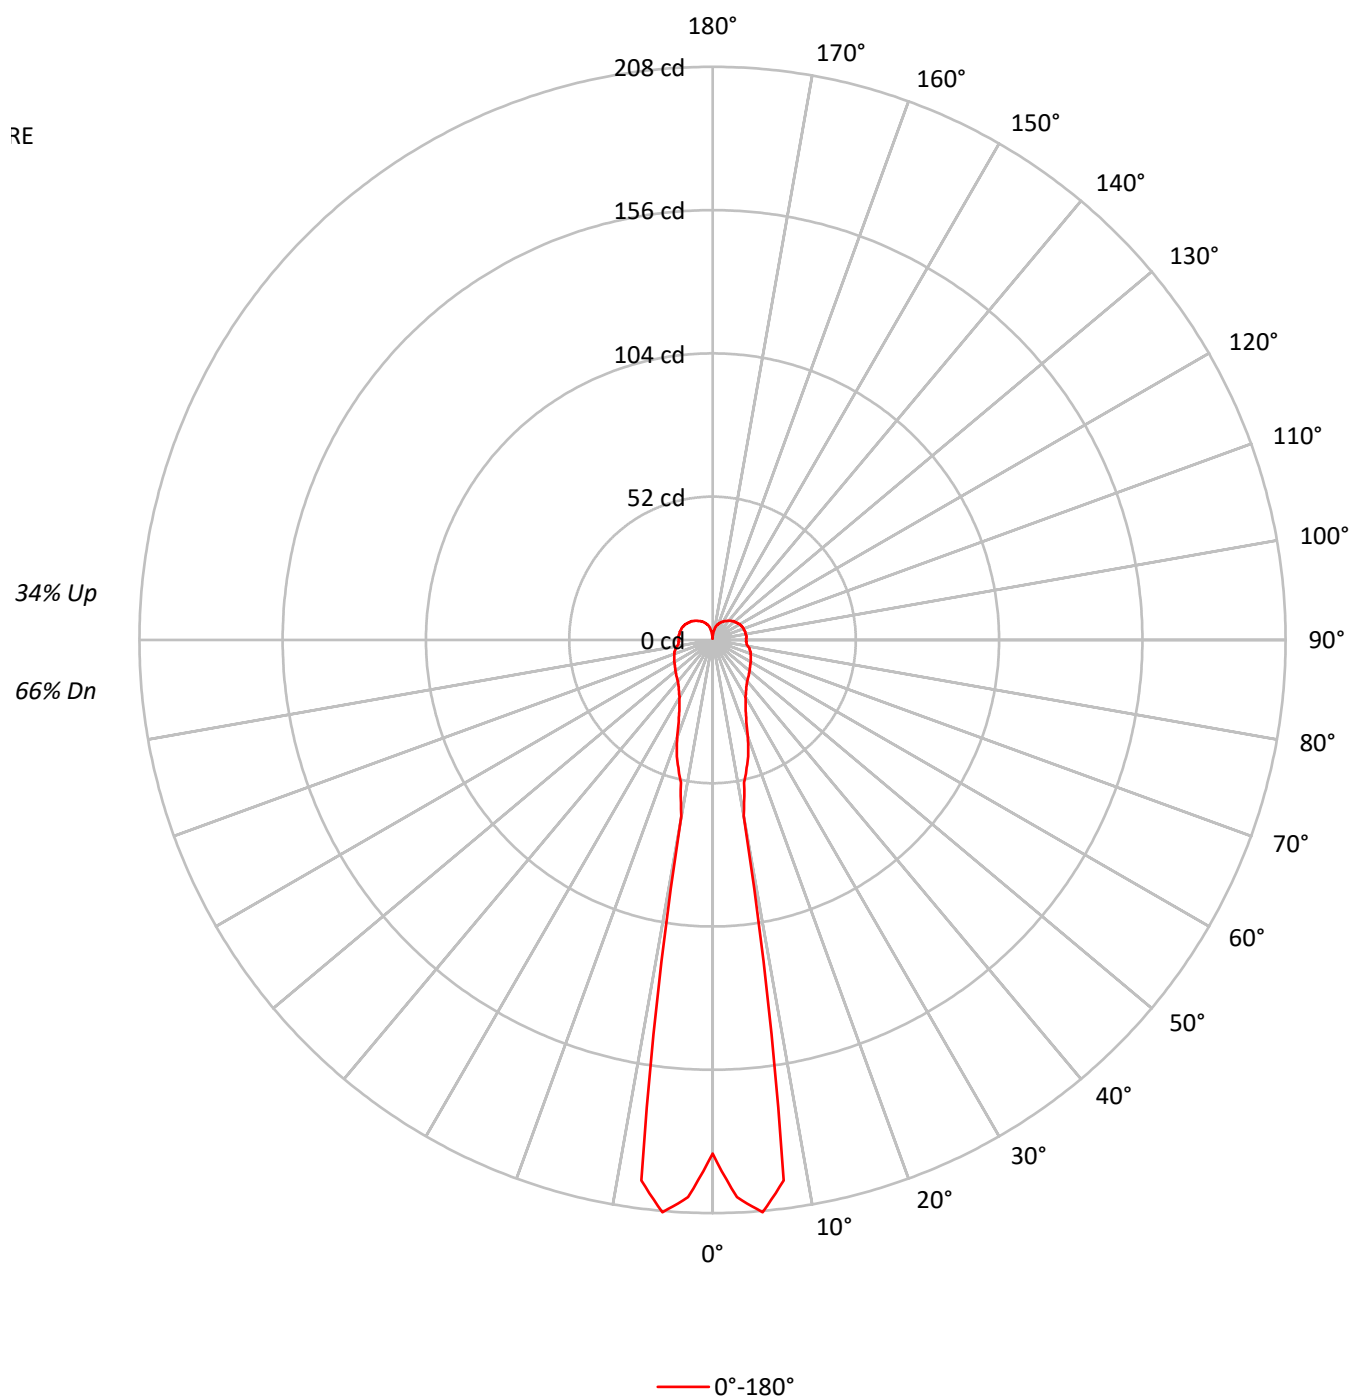

TEST NUMBER: P1245443

CATALOG NUMBER: PRLX-UNA-S-927-02L-U-NL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	111	111	111	111	105	105	105	105	92	92	92	81	81	81	71	71	71	66			
1	99	94	89	84	93	88	84	80	78	74	71	68	65	63	59	57	55	51			
2	90	81	74	68	84	77	70	65	68	63	58	59	55	52	52	49	46	42			
3	82	72	64	57	77	68	60	55	60	54	49	53	48	44	46	43	40	36			
4	76	64	56	49	71	61	53	47	54	48	43	48	43	39	42	38	35	32			
5	70	58	49	43	66	55	47	41	49	43	38	44	38	34	38	34	31	28			
6	65	53	44	38	61	50	42	37	45	39	34	40	35	31	36	32	28	26			
7	61	48	40	35	57	46	39	33	42	35	31	37	32	28	33	29	26	24			
8	57	45	37	31	54	43	35	30	39	33	28	35	30	26	31	27	24	22			
9	54	42	34	29	51	40	33	28	36	30	26	33	28	24	30	26	23	21			
10	51	39	32	27	48	37	30	26	34	28	24	31	26	23	28	24	21	19			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	9131
5°	8474
10°	2268
15°	1482
20°	1041
25°	727
30°	567
35°	475
40°	416
45°	377
50°	345
55°	320
60°	304
65°	289
70°	277
75°	266
80°	251
85°	245

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 377 cd/sqm

TEST NUMBER: P1245443

CATALOG NUMBER: PRLX-UNA-S-927-02L-U-NL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	16.4	8.4
10°-20°	13.5	6.9
20°-30°	13.4	6.9
30°-40°	13.5	6.9
40°-50°	14.3	7.3
50°-60°	15.0	7.7
60°-70°	15.2	7.8
70°-80°	14.8	7.6
80°-90°	13.6	7.0
90°-100°	13.4	6.9
100°-110°	12.8	6.6
110°-120°	11.6	6.0
120°-130°	9.7	5.0
130°-140°	7.6	3.9
140°-150°	5.3	2.7
150°-160°	3.2	1.7
160°-170°	1.5	0.8
170°-180°	0.2	0.1
0°-30°	43.3	22.2
0°-40°	56.7	29.1
0°-60°	86.0	44.1
0°-90°	129.6	66.5
90°-120°	37.9	19.4
90°-150°	60.4	31.0
90°-180°	65.0	33.3
0°-180°	195.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	186	
5°	208	16
15°	48	13
25°	28	13
35°	21	13
45°	18	14
55°	17	15
65°	15	15
75°	14	15
85°	12	10
90°	12	7
95°	12	10
105°	12	13
115°	12	12
125°	11	10
135°	10	8
145°	8	5
155°	7	3
165°	5	1
175°	2	0
180°	0	

TEST NUMBER: P1245443

CATALOG NUMBER: PRLX-UNA-S-927-02L-U-NL

CANDELA DISTRIBUTION (FULL):

0°	
0°	186.4
2.5°	202.4
5°	208.5
7.5°	197.9
10°	64.9
12.5°	53.1
15°	48.0
17.5°	43.2
20°	37.4
22.5°	32.1
25°	28.5
27.5°	26.0
30°	23.9
32.5°	22.6
35°	21.3
37.5°	20.4
40°	19.6
42.5°	19.0
45°	18.5
47.5°	18.0
50°	17.5
52.5°	17.1
55°	16.6
57.5°	16.3
60°	16.0
62.5°	15.7
65°	15.3
67.5°	15.0
70°	14.7
72.5°	14.5
75°	14.0
77.5°	13.7
80°	13.0
82.5°	12.5
85°	12.4
87.5°	12.2
90°	12.2
92.5°	12.2
95°	12.4
97.5°	12.4
100°	12.2
102.5°	12.2
105°	12.2
107.5°	12.0
110°	12.0

TEST NUMBER: P1245443

CATALOG NUMBER: PRLX-UNA-S-927-02L-U-NL

CANDELA DISTRIBUTION (continued):

	0°
112.5°	11.9
115°	11.7
117.5°	11.5
120°	11.4
122.5°	11.0
125°	10.9
127.5°	10.5
130°	10.4
132.5°	10.1
135°	9.7
137.5°	9.4
140°	9.1
142.5°	8.7
145°	8.4
147.5°	8.1
150°	7.7
152.5°	7.4
155°	6.9
157.5°	6.6
160°	6.1
162.5°	5.8
165°	5.3
167.5°	4.6
170°	3.8
172.5°	3.0
175°	2.0
177.5°	1.0
180°	0.5

TEST NUMBER: P1245443

CATALOG NUMBER: PRLX-UNA-S-927-02L-U-NL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.1	5.2	4.9	6.0	7.0	4.1	5.2	4.9	6.0	7.0
	3H	6.5	7.5	7.3	8.3	9.4	6.5	7.5	7.3	8.3	9.4
	4H	7.7	8.6	8.5	9.5	10.5	7.7	8.6	8.5	9.5	10.5
	6H	8.8	9.7	9.6	10.5	11.6	8.8	9.7	9.6	10.5	11.6
	8H	9.3	10.1	10.1	11.0	12.1	9.3	10.1	10.1	11.0	12.1
	12H	9.8	10.6	10.7	11.5	12.6	9.8	10.6	10.7	11.5	12.6
4H	2H	4.7	5.6	5.5	6.5	7.5	4.7	5.6	5.5	6.5	7.5
	3H	7.4	8.2	8.2	9.1	10.1	7.4	8.2	8.2	9.1	10.1
	4H	8.7	9.4	9.5	10.3	11.4	8.7	9.4	9.5	10.3	11.4
	6H	10.0	10.6	10.8	11.5	12.6	10.0	10.6	10.8	11.5	12.6
	8H	10.6	11.2	11.4	12.1	13.2	10.6	11.2	11.4	12.1	13.2
	12H	11.2	11.7	12.0	12.6	13.8	11.2	11.7	12.0	12.6	13.8
8H	4H	9.1	9.7	10.0	10.6	11.7	9.1	9.7	10.0	10.6	11.7
	6H	10.6	11.1	11.5	12.0	13.1	10.6	11.1	11.5	12.0	13.1
	8H	11.3	11.8	12.2	12.7	13.8	11.3	11.8	12.2	12.7	13.8
	12H	12.1	12.5	13.0	13.4	14.6	12.1	12.5	13.0	13.4	14.6
12H	4H	9.2	9.8	10.1	10.7	11.8	9.2	9.8	10.1	10.7	11.8
	6H	10.7	11.2	11.6	12.1	13.3	10.7	11.2	11.6	12.1	13.3
	8H	11.5	12.0	12.4	12.9	14.0	11.5	12.0	12.4	12.9	14.0

(END OF REPORT)