

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1245460

Luminaire Tested: PRLX-UNA-S-930-02L-U-PS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245460
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2412-299-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UNA-S-930-02L-U-PS
Description: 3D PRINTED PENDANT LED LUMINAIRE, SMALL LIGHT ENGINE, PINSTRIPE SHADE TEXTURE LIGHT LEVEL 1
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 233.1 lumens
Efficiency: N/A
Efficacy: 37.0 lumens/watt
Spacing Criteria (0/90/45): 0.33 / 0.33 / 0.34
Luminous Opening: Rectangular w/ Sides (W: 0.47' x L: 0.47' x H: 1.12')
CIE Type: Semi-Direct

Input Watts (W): 6.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

TEST NUMBER: P1245460

CATALOG NUMBER: PRLX-UNA-S-930-02L-U-PS

Luminous Intensity Polar Plot

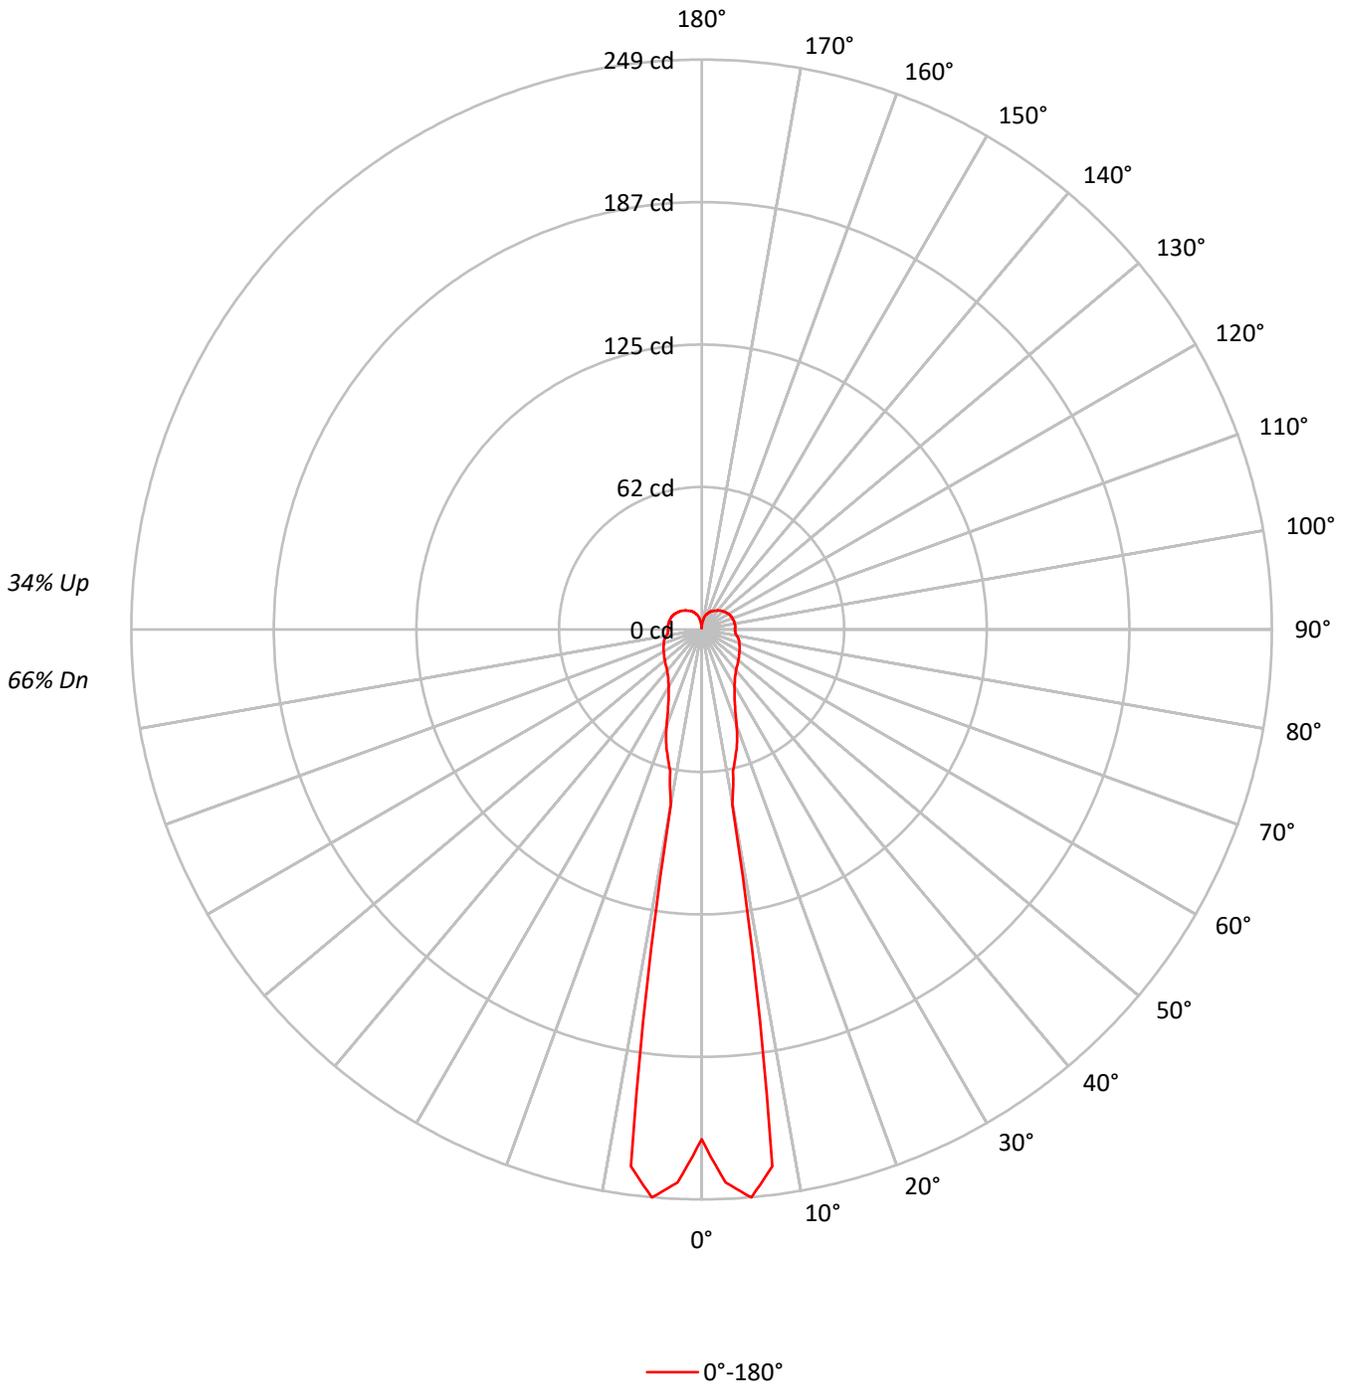



TEST NUMBER: P1245460

CATALOG NUMBER: PRLX-UNA-S-930-02L-U-PS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	111	111	111	111	105	105	105	105	92	92	92		81	81	81		71	71	71	66
1	99	94	89	84	93	88	84	80	78	74	71		68	65	63		59	57	55	51
2	90	81	74	68	84	77	70	65	68	63	58		59	55	52		52	49	46	42
3	82	72	64	57	77	68	60	55	60	54	49		53	48	44		46	43	40	36
4	76	64	56	49	71	61	53	47	54	48	43		48	43	39		42	38	35	32
5	70	58	49	43	66	55	47	41	49	43	38		44	38	34		38	34	31	28
6	65	53	44	38	61	50	42	37	45	39	34		40	35	31		36	32	28	26
7	61	48	40	35	57	46	39	33	42	35	31		37	32	28		33	29	26	24
8	57	45	37	31	54	43	35	30	39	33	28		35	30	26		31	27	24	22
9	54	42	34	29	51	40	33	28	36	30	26		33	28	24		30	26	23	21
10	51	39	32	27	48	37	30	26	34	28	24		31	26	23		28	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	10910
5°	10124
10°	2712
15°	1769
20°	1244
25°	870
30°	678
35°	567
40°	497
45°	450
50°	413
55°	384
60°	363
65°	345
70°	330
75°	317
80°	301
85°	293

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 450 cd/sqm

TEST NUMBER: P1245460

CATALOG NUMBER: PRLX-UNA-S-930-02L-U-PS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	19.6	8.4
10°-20°	16.1	6.9
20°-30°	16.0	6.9
30°-40°	16.1	6.9
40°-50°	17.1	7.3
50°-60°	17.9	7.7
60°-70°	18.2	7.8
70°-80°	17.7	7.6
80°-90°	16.2	7.0
90°-100°	16.0	6.9
100°-110°	15.4	6.6
110°-120°	13.9	6.0
120°-130°	11.6	5.0
130°-140°	9.0	3.9
140°-150°	6.3	2.7
150°-160°	3.9	1.7
160°-170°	1.8	0.8
170°-180°	0.3	0.1
0°-30°	51.7	22.2
0°-40°	67.8	29.1
0°-60°	102.8	44.1
0°-90°	154.8	66.4
90°-120°	45.3	19.4
90°-150°	72.2	31.0
90°-180°	78.0	33.5
0°-180°	233.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	223	
5°	249	20
15°	57	16
25°	34	16
35°	25	16
45°	22	17
55°	20	18
65°	18	18
75°	17	18
85°	15	12
90°	15	8
95°	15	12
105°	15	15
115°	14	14
125°	13	12
135°	12	9
145°	10	6
155°	8	4
165°	6	2
175°	2	0
180°	1	

TEST NUMBER: P1245460

CATALOG NUMBER: PRLX-UNA-S-930-02L-U-PS

CANDELA DISTRIBUTION (FULL):

0°	
0°	222.7
2.5°	241.8
5°	249.1
7.5°	236.5
10°	77.6
12.5°	63.4
15°	57.3
17.5°	51.6
20°	44.7
22.5°	38.4
25°	34.1
27.5°	31.1
30°	28.6
32.5°	27.0
35°	25.4
37.5°	24.4
40°	23.4
42.5°	22.6
45°	22.1
47.5°	21.5
50°	20.9
52.5°	20.5
55°	19.9
57.5°	19.5
60°	19.1
62.5°	18.7
65°	18.3
67.5°	17.9
70°	17.5
72.5°	17.3
75°	16.7
77.5°	16.3
80°	15.6
82.5°	15.0
85°	14.8
87.5°	14.6
90°	14.6
92.5°	14.6
95°	14.8
97.5°	14.8
100°	14.6
102.5°	14.6
105°	14.6
107.5°	14.4
110°	14.4

TEST NUMBER: P1245460

CATALOG NUMBER: PRLX-UNA-S-930-02L-U-PS

CANDELA DISTRIBUTION (continued):

	0°
112.5°	14.2
115°	14.0
117.5°	13.8
120°	13.6
122.5°	13.2
125°	13.0
127.5°	12.6
130°	12.4
132.5°	12.0
135°	11.6
137.5°	11.2
140°	10.8
142.5°	10.4
145°	10.0
147.5°	9.6
150°	9.3
152.5°	8.9
155°	8.3
157.5°	7.9
160°	7.3
162.5°	6.9
165°	6.3
167.5°	5.5
170°	4.5
172.5°	3.5
175°	2.4
177.5°	1.2
180°	0.6



TEST NUMBER: P1245460

CATALOG NUMBER: PRLX-UNA-S-930-02L-U-PS

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.7	5.8	5.5	6.6	7.6	4.7	5.8	5.5	6.6	7.6
	3H	7.1	8.1	7.9	9.0	10.0	7.1	8.1	7.9	9.0	10.0
	4H	8.3	9.2	9.1	10.1	11.1	8.3	9.2	9.1	10.1	11.1
	6H	9.4	10.3	10.3	11.1	12.2	9.4	10.3	10.3	11.1	12.2
	8H	9.9	10.8	10.8	11.6	12.7	9.9	10.8	10.8	11.6	12.7
	12H	10.4	11.2	11.3	12.1	13.2	10.4	11.2	11.3	12.1	13.2
4H	2H	5.3	6.3	6.1	7.1	8.2	5.3	6.3	6.1	7.1	8.2
	3H	8.0	8.8	8.8	9.7	10.7	8.0	8.8	8.8	9.7	10.7
	4H	9.3	10.0	10.1	10.9	12.0	9.3	10.0	10.1	10.9	12.0
	6H	10.6	11.2	11.4	12.1	13.2	10.6	11.2	11.4	12.1	13.2
	8H	11.2	11.8	12.0	12.7	13.8	11.2	11.8	12.0	12.7	13.8
	12H	11.8	12.3	12.7	13.3	14.4	11.8	12.3	12.7	13.3	14.4
8H	4H	9.7	10.3	10.6	11.2	12.3	9.7	10.3	10.6	11.2	12.3
	6H	11.2	11.7	12.1	12.7	13.8	11.2	11.7	12.1	12.7	13.8
	8H	11.9	12.4	12.8	13.3	14.4	11.9	12.4	12.8	13.3	14.4
	12H	12.7	13.1	13.6	14.0	15.2	12.7	13.1	13.6	14.0	15.2
12H	4H	9.8	10.4	10.7	11.3	12.4	9.8	10.4	10.7	11.3	12.4
	6H	11.3	11.8	12.2	12.7	13.9	11.3	11.8	12.2	12.7	13.9
	8H	12.1	12.6	13.0	13.5	14.7	12.1	12.6	13.0	13.5	14.7

(END OF REPORT)