

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1245418

Luminaire Tested: PRLX-UNA-M-935-03L-U-PS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245418
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2412-299-24)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UNA-M-935-03L-U-PS
Description: 3D PRINTED PENDANT LED LUMINAIRE, MEDIUM LIGHT ENGINE, PINSTRIPE SHADE TEXTURE
LIGHT LEVEL 2
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 300.3 lumens
Efficiency: N/A
Efficacy: 27.1 lumens/watt
Spacing Criteria (0/90/45): 0.21 / 0.21 / 0.18
Luminous Opening: Rectangular w/ Sides (W: 0.46' x L: 0.46' x H: 1.92')
CIE Type: General Diffuse

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT

TEST NUMBER: P1245418

CATALOG NUMBER: PRLX-UNA-M-935-03L-U-PS

Luminous Intensity Polar Plot

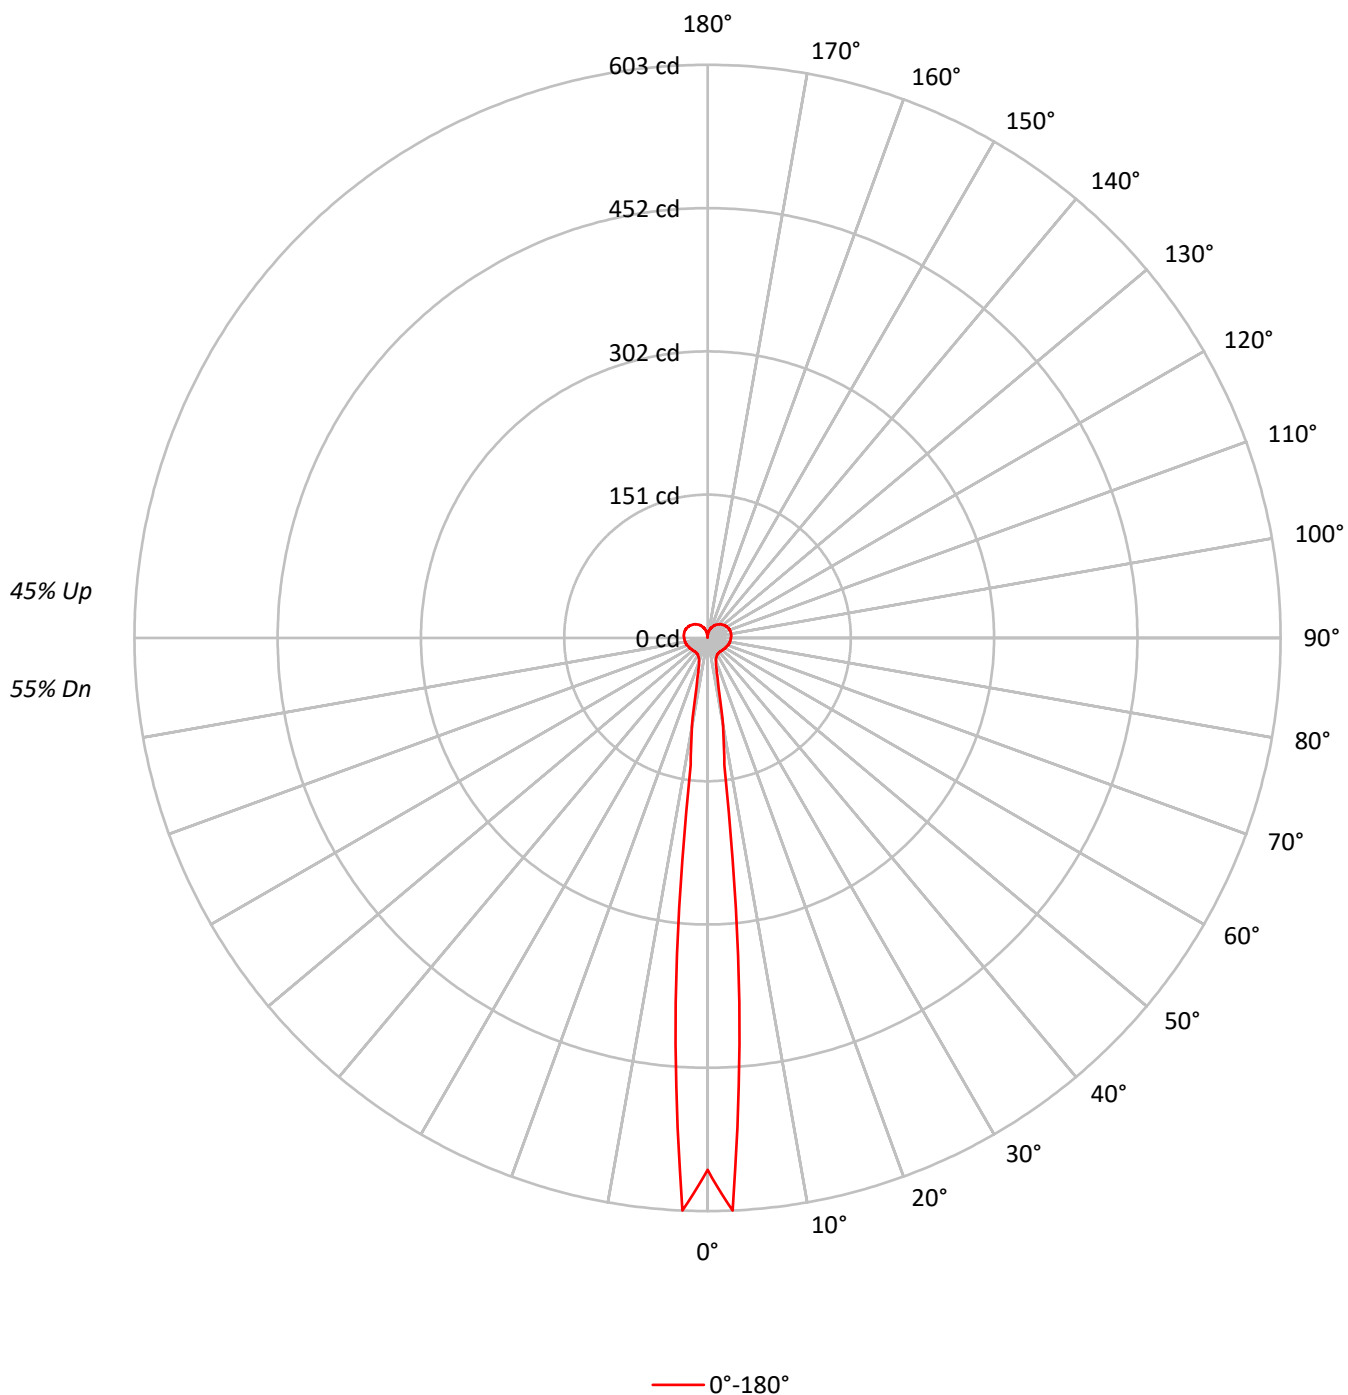



TEST NUMBER: P1245418

CATALOG NUMBER: PRLX-UNA-M-935-03L-U-PS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55			
1	95	90	84	79	88	83	78	74	70	67	64	59	56	54	48	46	45	39			
2	86	77	70	63	79	71	65	59	61	55	51	51	47	43	42	39	36	31			
3	78	68	59	53	72	63	55	49	53	48	43	45	40	36	37	33	30	26			
4	72	60	51	45	66	56	48	42	48	42	37	40	35	32	33	30	27	23			
5	67	54	45	39	61	50	43	37	43	37	32	37	32	28	30	27	24	21			
6	62	49	41	34	57	46	38	33	40	33	29	34	29	25	28	25	22	19			
7	58	45	37	31	53	42	35	29	37	31	26	31	27	23	27	23	20	17			
8	54	41	34	28	50	39	32	27	34	28	24	29	25	21	25	21	19	16			
9	51	38	31	26	47	36	29	25	32	26	22	28	23	20	24	20	17	15			
10	48	36	29	24	45	34	27	23	30	24	21	26	22	19	23	19	17	15			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	28678
5°	14515
10°	2788
15°	936
20°	560
25°	427
30°	352
35°	317
40°	289
45°	278
50°	270
55°	265
60°	267
65°	266
70°	272
75°	280
80°	285
85°	293

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 90°

Luminance: 303 cd/sqm

TEST NUMBER: P1245418

CATALOG NUMBER: PRLX-UNA-M-935-03L-U-PS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	24.8	8.3
10°-20°	11.9	4.0
20°-30°	10.3	3.4
30°-40°	12.4	4.1
40°-50°	15.3	5.1
50°-60°	18.6	6.2
60°-70°	21.8	7.3
70°-80°	24.7	8.2
80°-90°	26.5	8.8
90°-100°	27.2	9.1
100°-110°	26.5	8.8
110°-120°	24.1	8.0
120°-130°	20.2	6.7
130°-140°	15.6	5.2
140°-150°	10.8	3.6
150°-160°	6.3	2.1
160°-170°	2.7	0.9
170°-180°	0.4	0.1
0°-30°	47.1	15.7
0°-40°	59.5	19.8
0°-60°	93.5	31.1
0°-90°	166.5	55.5
90°-120°	77.8	25.9
90°-150°	124.5	41.4
90°-180°	134.0	44.6
0°-180°	300.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	560	
5°	385	25
15°	37	12
25°	22	10
35°	20	12
45°	20	15
55°	21	19
65°	22	22
75°	24	25
85°	24	20
90°	25	13
95°	25	20
105°	25	27
115°	24	24
125°	23	20
135°	20	16
145°	17	11
155°	14	6
165°	9	3
175°	3	0
180°	0	

TEST NUMBER: P1245418

CATALOG NUMBER: PRLX-UNA-M-935-03L-U-PS

CANDELA DISTRIBUTION (FULL):

0°	
0°	559.6
2.5°	603.0
5°	385.4
7.5°	134.4
10°	93.1
12.5°	53.3
15°	37.4
17.5°	30.2
20°	25.9
22.5°	23.5
25°	22.3
27.5°	21.1
30°	20.3
32.5°	19.9
35°	19.9
37.5°	19.5
40°	19.5
42.5°	19.5
45°	19.9
47.5°	19.9
50°	20.3
52.5°	20.3
55°	20.7
57.5°	21.1
60°	21.5
62.5°	21.5
65°	21.9
67.5°	22.3
70°	22.7
72.5°	23.1
75°	23.5
77.5°	23.5
80°	23.9
82.5°	24.3
85°	24.3
87.5°	24.3
90°	24.7
92.5°	24.7
95°	25.1
97.5°	25.1
100°	25.1
102.5°	25.1
105°	25.1
107.5°	25.1
110°	24.7

TEST NUMBER: P1245418

CATALOG NUMBER: PRLX-UNA-M-935-03L-U-PS

CANDELA DISTRIBUTION (continued):

	0°
112.5°	24.7
115°	24.3
117.5°	23.9
120°	23.5
122.5°	23.1
125°	22.7
127.5°	21.9
130°	21.5
132.5°	20.7
135°	20.3
137.5°	19.5
140°	18.7
142.5°	17.9
145°	17.1
147.5°	16.3
150°	15.5
152.5°	14.3
155°	13.5
157.5°	12.3
160°	11.5
162.5°	10.3
165°	9.1
167.5°	8.0
170°	6.8
172.5°	4.8
175°	2.8
177.5°	1.2
180°	0.4

TEST NUMBER: P1245418

CATALOG NUMBER: PRLX-UNA-M-935-03L-U-PS

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	2.6	3.6	3.4	4.5	5.7	2.6	3.6	3.4	4.5	5.7
	3H	5.6	6.5	6.5	7.4	8.6	5.6	6.5	6.5	7.4	8.6
	4H	7.0	7.9	8.0	8.9	10.1	7.0	7.9	8.0	8.9	10.1
	6H	8.5	9.3	9.4	10.3	11.5	8.5	9.3	9.4	10.3	11.5
	8H	9.2	10.0	10.2	11.0	12.2	9.2	10.0	10.2	11.0	12.2
	12H	9.9	10.7	10.9	11.6	12.9	9.9	10.7	10.9	11.6	12.9
4H	2H	3.3	4.2	4.2	5.1	6.3	3.3	4.2	4.2	5.1	6.3
	3H	6.5	7.3	7.4	8.2	9.5	6.5	7.3	7.4	8.2	9.5
	4H	8.2	8.9	9.1	9.8	11.1	8.2	8.9	9.1	9.8	11.1
	6H	9.8	10.4	10.7	11.4	12.6	9.8	10.4	10.7	11.4	12.6
	8H	10.6	11.2	11.5	12.2	13.4	10.6	11.2	11.5	12.2	13.4
	12H	11.4	11.9	12.4	12.9	14.2	11.4	11.9	12.4	12.9	14.2
8H	4H	8.7	9.3	9.6	10.3	11.5	8.7	9.3	9.6	10.3	11.5
	6H	10.5	11.0	11.5	12.0	13.3	10.5	11.0	11.5	12.0	13.3
	8H	11.5	11.9	12.5	12.9	14.2	11.5	11.9	12.5	12.9	14.2
	12H	12.5	12.9	13.4	13.9	15.2	12.5	12.9	13.4	13.9	15.2
12H	4H	8.8	9.3	9.8	10.3	11.6	8.8	9.3	9.8	10.3	11.6
	6H	10.7	11.2	11.7	12.2	13.5	10.7	11.2	11.7	12.2	13.5
	8H	11.8	12.2	12.7	13.2	14.5	11.8	12.2	12.7	13.2	14.5

(END OF REPORT)