

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P1245420

Luminaire Tested: PRLX-UNA-M-935-04L-U-OW

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1245420  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2412-299-24)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PrentaLux  
Catalog Number: PRLX-UNA-M-935-04L-U-OW  
Description: 3D PRINTED PENDANT LED LUMINAIRE, MEDIUM LIGHT ENGINE, OPEN WEAVE SHADE TEXTU  
LIGHT LEVEL 3  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 451.2 lumens  
Efficiency: N/A  
Efficacy: 27.9 lumens/watt  
Spacing Criteria (0/90/45): 0.21 / 0.21 / 0.18  
Luminous Opening: Rectangular w/ Sides (W: 0.46' x L: 0.46' x H: 1.92')  
CIE Type: General Diffuse  
  
Input Watts (W): 16.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT

TEST NUMBER: P1245420  
CATALOG NUMBER: PRLX-UNA-M-935-04L-U-OW

### Luminous Intensity Polar Plot

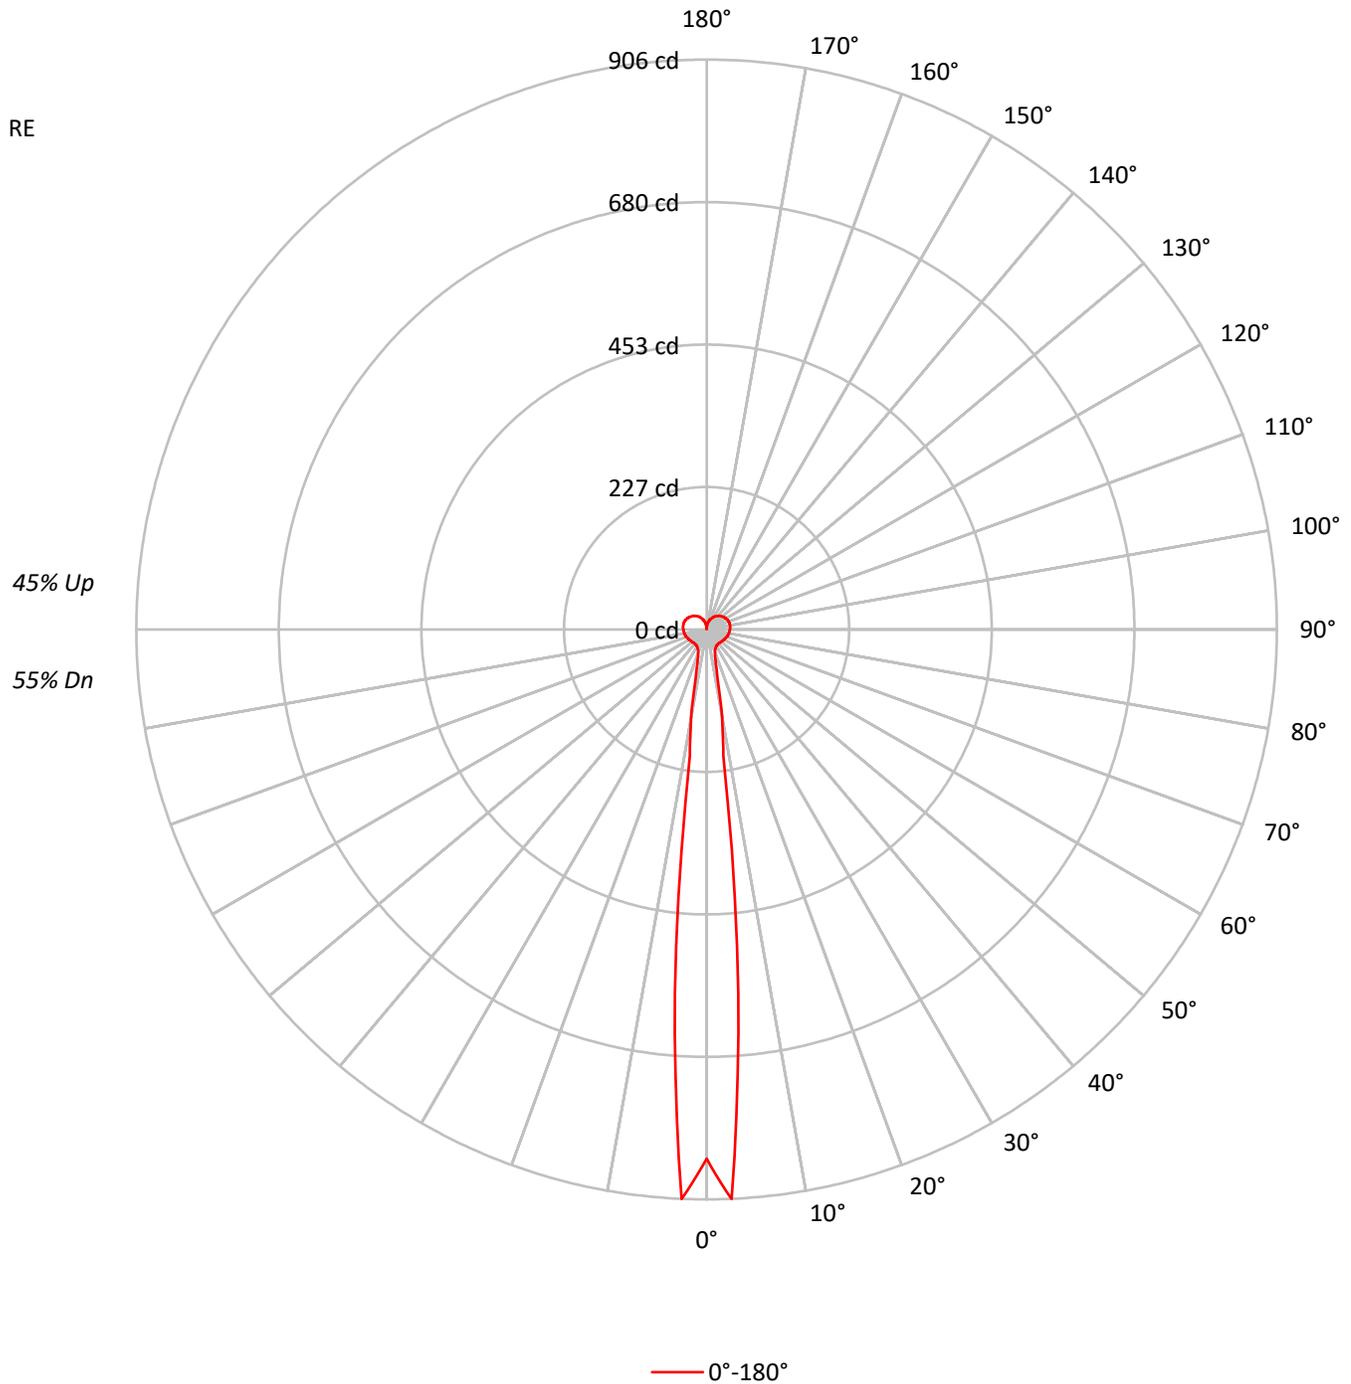



TEST NUMBER: P1245420

CATALOG NUMBER: PRLX-UNA-M-935-04L-U-OW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	108	108	108	108	101	101	101	101	86	86	86		73	73	73		61	61	61	55
1	95	90	84	79	88	83	78	74	70	67	64		59	56	54		48	46	45	39
2	86	77	70	63	79	71	65	59	61	56	51		51	47	43		42	39	36	31
3	78	68	59	53	72	63	55	49	53	48	43		45	40	36		37	33	30	26
4	72	60	51	45	66	56	48	42	48	42	37		40	35	32		33	30	27	23
5	67	54	45	39	61	50	43	37	43	37	32		37	32	28		30	27	24	21
6	62	49	41	34	57	46	38	33	40	33	29		34	29	25		28	25	22	19
7	58	45	37	31	53	42	35	29	37	31	26		31	27	23		27	23	20	17
8	54	41	34	28	50	39	32	27	34	28	24		29	25	21		25	21	19	16
9	51	38	31	26	47	36	29	25	32	26	22		28	23	20		24	20	17	15
10	48	36	29	24	45	34	27	23	30	24	21		26	22	19		23	19	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	43114
5°	21822
10°	4190
15°	1406
20°	841
25°	642
30°	529
35°	476
40°	435
45°	418
50°	406
55°	399
60°	402
65°	400
70°	409
75°	421
80°	429
85°	440

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 90°  
 Luminance: 455 cd/sqm

TEST NUMBER: P1245420

CATALOG NUMBER: PRLX-UNA-M-935-04L-U-OW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	37.3	8.3
10°-20°	17.9	4.0
20°-30°	15.5	3.4
30°-40°	18.7	4.1
40°-50°	23.1	5.1
50°-60°	28.0	6.2
60°-70°	32.7	7.3
70°-80°	37.1	8.2
80°-90°	39.8	8.8
90°-100°	40.9	9.1
100°-110°	39.8	8.8
110°-120°	36.2	8.0
120°-130°	30.4	6.7
130°-140°	23.5	5.2
140°-150°	16.2	3.6
150°-160°	9.4	2.1
160°-170°	4.0	0.9
170°-180°	0.6	0.1
0°-30°	70.8	15.7
0°-40°	89.5	19.8
0°-60°	140.5	31.1
0°-90°	250.2	55.5
90°-120°	116.9	25.9
90°-150°	187.0	41.4
90°-180°	201.0	44.5
0°-180°	451.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	841	
5°	579	37
15°	56	18
25°	34	16
35°	30	19
45°	30	23
55°	31	28
65°	33	33
75°	35	37
85°	36	30
90°	37	20
95°	38	31
105°	38	40
115°	36	36
125°	34	30
135°	30	23
145°	26	16
155°	20	9
165°	14	4
175°	4	1
180°	1	

TEST NUMBER: P1245420

CATALOG NUMBER: PRLX-UNA-M-935-04L-U-OW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	841.3
2.5°	906.4
5°	579.4
7.5°	202.1
10°	139.9
12.5°	80.1
15°	56.2
17.5°	45.4
20°	38.9
22.5°	35.3
25°	33.5
27.5°	31.7
30°	30.5
32.5°	29.9
35°	29.9
37.5°	29.3
40°	29.3
42.5°	29.3
45°	29.9
47.5°	29.9
50°	30.5
52.5°	30.5
55°	31.1
57.5°	31.7
60°	32.3
62.5°	32.3
65°	32.9
67.5°	33.5
70°	34.1
72.5°	34.7
75°	35.3
77.5°	35.3
80°	35.9
82.5°	36.5
85°	36.5
87.5°	36.5
90°	37.1
92.5°	37.1
95°	37.7
97.5°	37.7
100°	37.7
102.5°	37.7
105°	37.7
107.5°	37.7
110°	37.1

TEST NUMBER: P1245420

CATALOG NUMBER: PRLX-UNA-M-935-04L-U-OW

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	37.1
115°	36.5
117.5°	35.9
120°	35.3
122.5°	34.7
125°	34.1
127.5°	32.9
130°	32.3
132.5°	31.1
135°	30.5
137.5°	29.3
140°	28.1
142.5°	26.9
145°	25.7
147.5°	24.5
150°	23.3
152.5°	21.5
155°	20.3
157.5°	18.5
160°	17.3
162.5°	15.5
165°	13.8
167.5°	12.0
170°	10.2
172.5°	7.2
175°	4.2
177.5°	1.8
180°	0.6



TEST NUMBER: P1245420

CATALOG NUMBER: PRLX-UNA-M-935-04L-U-OW

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.0	5.0	4.9	5.9	7.1	4.0	5.0	4.9	5.9	7.1
	3H	7.0	7.9	7.9	8.8	10.0	7.0	7.9	7.9	8.8	10.0
	4H	8.5	9.3	9.4	10.3	11.5	8.5	9.3	9.4	10.3	11.5
	6H	9.9	10.8	10.9	11.7	12.9	9.9	10.8	10.9	11.7	12.9
	8H	10.6	11.4	11.6	12.4	13.6	10.6	11.4	11.6	12.4	13.6
	12H	11.3	12.1	12.3	13.0	14.3	11.3	12.1	12.3	13.0	14.3
4H	2H	4.7	5.6	5.6	6.5	7.8	4.7	5.6	5.6	6.5	7.8
	3H	7.9	8.7	8.8	9.6	10.9	7.9	8.7	8.8	9.6	10.9
	4H	9.6	10.3	10.5	11.2	12.5	9.6	10.3	10.5	11.2	12.5
	6H	11.2	11.8	12.1	12.8	14.1	11.2	11.8	12.1	12.8	14.1
	8H	12.0	12.6	13.0	13.6	14.9	12.0	12.6	13.0	13.6	14.9
	12H	12.8	13.4	13.8	14.4	15.6	12.8	13.4	13.8	14.4	15.6
8H	4H	10.1	10.7	11.0	11.7	12.9	10.1	10.7	11.0	11.7	12.9
	6H	11.9	12.4	12.9	13.5	14.7	11.9	12.4	12.9	13.5	14.7
	8H	12.9	13.4	13.9	14.4	15.6	12.9	13.4	13.9	14.4	15.6
	12H	13.9	14.3	14.9	15.3	16.6	13.9	14.3	14.9	15.3	16.6
12H	4H	10.2	10.8	11.2	11.7	13.0	10.2	10.8	11.2	11.7	13.0
	6H	12.1	12.6	13.1	13.6	14.9	12.1	12.6	13.1	13.6	14.9
	8H	13.2	13.6	14.2	14.6	15.9	13.2	13.6	14.2	14.6	15.9

(END OF REPORT)